

Quotation

2277

		Description	Qty.	Unit Price	Price
VEHICLE					
S	0100-011	MODEL	1	148,097	148,097
S	8012-001	CUSTOMERS / OEMS	1	0	0
S	8011-013	MODEL YEAR	1	0	0
S	8001-001	COUNTRY OF SERVICE	1	0	0
O	8006-009	APPARATUS TYPE	1	0	0
S	8008-001	VEHICLE TYPE	1	0	0
S	0104-001	AXLE CONFIGURATION	1	0	0
S	0101-002	GROSS AXLE WEIGHT RATINGS FRONT	1	0	0
O	0102-003	GROSS AXLE WEIGHT RATINGS REAR	1	0	0
O	8010-002	PUMP PROVISION	1	0	0
CAB					
O	1000-004	CAB STYLE	1	2,981	2,981
O	8101-103	OCCUPANT PROTECTION	1	1,102	1,102
S	1501-002	CAB FRONT FASCIA	1	0	0
S	1518-013	FRONT GRILLE	1	0	0
S	1551-002	CAB UNDERCOAT	1	0	0
S	1552-002	CAB SIDE DRIP RAIL	1	0	0
S	1521-001	CAB PAINT EXTERIOR	1	0	0
S	1533-001	CAB PAINT MANUFACTURER	1	0	0
O	1522-554	CAB PAINT PRIMARY/LOWER COLOR	1	0	0
S	8013-021	CAB PAINT WARRANTY	1	0	0
S	1334-016	CAB PAINT INTERIOR	1	0	0
O	1005-001	CAB ENTRY DOORS	1	0	0
S	1101-001	CAB ENTRY DOOR TYPE	1	0	0
S	1322-002	CAB INSULATION	1	0	0
S	8004-012	CAB STRUCTURAL WARRANTY	1	0	0
S	9001-006	CAB TEST INFORMATION	1	0	0
ELECTRICAL POWER DISTRIBUTION					
S	5000-001	ELECTRICAL SYSTEM	1	0	0
O	5006-002	APPARATUS WIRING PROVISION	1	327	327
O	5004-003	LOAD MANAGEMENT SYSTEM	1	758	758
S	5622-009	DATA RECORDING SYSTEM	1	0	0

			w/Remote USB Data Link			
S	5031-003	ACCESSORY POWER	Accessory Pwr & Gnd Stud 40A Batt Dir & 15A Ign Sw	1	0	0
S	5011-001	EXTERIOR ELECTRICAL TERMINAL COATING	Exterior Electrical Terminal Coating Spray On Plasti Dip	1	0	0

ENGINE

O	1701-146	ENGINE	Engine Diesel 450HP Cummins ISL9 - EPA 2013	1	9,148	9,148
S	1329-001	CAB ENGINE TUNNEL	Cab Engine Tunnel Small/Medium	1	0	0
S	1731-002	DIESEL PARTICULATE FILTER CONTROLS	DPF Ctrl Regeneration Sw & Inhibit Sw	1	0	0
S	1718-002	ENGINE PROGRAMMING HIGH IDLE SPEED	Engine Programming High Idle Speed 1250 RPM	1	0	0
O	1719-004	ENGINE HIGH IDLE CONTROL	Engine High Idle Ctrl Manual and Automatic	1	0	0
O	1710-002	ENGINE PROGRAMMING ROAD SPEED GOVERNOR	Engine Programming Road Speed Governor Disabled	1	0	0
O	1713-010	AUXILIARY ENGINE BRAKE	Aux Engine Brake Compression Brake w/VG Turbo	1	2,636	2,636
O	1708-004	AUXILIARY ENGINE BRAKE CONTROL	Aux Engine Brake Ctrl On/Off & Low/Med/High Sw Pnl	1	0	0
S	1720-003	ELECTRONIC ENGINE OIL LEVEL INDICATOR	Elec Engine Oil Level Indicator	1	0	0
O	1715-001	FLUID FILLS	Fluid Fills Fwd For Med Displacement Cap	1	693	693
S	1735-001	ENGINE DRAIN PLUG	Engine Drain Plug	1	0	0
S	8002-001	ENGINE WARRANTY	Engine Warranty Cummins (5) Year/100,000 Miles	1	0	0
O	1707-025	REMOTE THROTTLE HARNESS	Rmt Throttle Harness PSG Class 1 Total Press Gov Side Mnt	1	691	691
S	1721-001	ENGINE PROGRAMMING REMOTE THROTTLE	Engine Program Rmt Throttle Off	1	0	0
O	1725-003	CRUISE CONTROL	Cruise Ctrl Column Mtd	1	328	328
S	1727-001	ENGINE PROGRAMMING IDLE SPEED	Engine Programming Idle Speed 700 RPM	1	0	0

COOLING

O	2704-002	ENGINE FAN DRIVE	Engine Fan Drive Clutch	1	592	592
S	2701-010	ENGINE COOLING SYSTEM	Engine Cooling Sys Serial Flow Medium	1	0	0
S	2711-002	ENGINE COOLING SYSTEM PROTECTION	Engine Cooling System Protection Light Duty Skid Plate	1	0	0
S	2708-001	ENGINE COOLANT	Engine Coolant Extended Life	1	0	0
O	2707-002	ENGINE COOLANT FILTER	Engine Coolant Filter	1	224	224
S	2706-003	ELECTRONIC COOLANT LEVEL INDICATOR	Elec Low Coolant Level Indicator	1	0	0
O	2705-002	ENGINE PUMP HEAT EXCHANGER	Engine Pump Heat Exchanger	1	225	225
S	2709-004	COOLANT HOSES	Coolant Hoses Silicone Heater & Radiator w/Cab Int Rubber Hoses	1	0	0

AIR INTAKE

O	2801-005	ENGINE AIR INTAKE	Engine Air Intake Filtration and Restriction w/Replaceable Element	1	0	0
---	----------	-------------------	--	---	---	---

O	2802-002	AIR INTAKE PROTECTION	Air Intake Protection Light Duty Skid Plate	1	559	559
---	----------	-----------------------	---	---	-----	-----

EXHAUST

O	2901-029	ENGINE EXHAUST SYSTEM	Eng Exhaust Sys Under Frm RH w/DPF/SCR Swback w/Inboard SCR	1	1,164	1,164
O	2907-003	DIESEL EXHAUST FLUID TANK	Diesel Exhaust Fluid Tank LH 6 Gal Fill Thru Rr Step	1	81	81
S	2902-010	ENGINE EXHAUST ACCESSORIES	Engine Exh Acc Exh Temp Mitigation	1	0	0
S	2906-002	ENGINE EXHAUST WRAP	Engine Exhaust Wrap	1	0	0

TRANSMISSION

S	1801-015	TRANSMISSION	Transmission Allison 3000 EVS	1	0	0
O	1806-003	TRANSMISSION MODE PROGRAMMING	Transmission Mode Programming 5th Startup/6th Mode	1	0	0
O	1811-004	TRANSMISSION FEATURE PROGRAMMING	Transmission Feature Programming Allison Gen V-E I/O Package 198/Pumper	1	0	0
O	1807-005	TRANSMISSION SHIFT SELECTOR	Transmission GEN V-E Shift Sel Key Pad/Push Button	1	0	0
S	1815-002	ELECTRONIC TRANSMISSION OIL LEVEL INDICATOR	Elec Transmission Oil Level Indicator	1	0	0
S	1814-002	TRANSMISSION PRE-SELECT WITH AUXILIARY BRAKE	2nd Gear Pre-Select	1	0	0
S	1808-007	TRANSMISSION COOLING SYSTEM	Transmission Cooling System	1	0	0
S	1817-001	TRANSMISSION DRAIN PLUG	Transmission Drain Plug	1	0	0
S	8005-001	TRANSMISSION WARRANTY	Transmission Warranty Allison (5) Year	1	0	0

DRIVELINE

S	3001-001	DRIVELINE	Driveline Spicer 1710 HD	1	0	0
O	3005-008	MIDSHIP PUMP / GEARBOX	Midship Pump OEM Installed w/NO Jackshaft	1	0	0

FUEL SYSTEMS

S	3109-021	FUEL FILTER/WATER SEPARATOR	Fuel Filter/Wtr Separator Fleetguard FS1003 w/Lt & Alarm	1	0	0
O	3111-002	FUEL LINES	Fuel Lines Wire Braid	1	67	67
S	3103-008	ELECTRIC FUEL PRIMER	Electric Fuel Primer Engine Sply Electric Lift Pump	1	0	0
S	3112-003	FUEL COOLER	Fuel Cooler Behind Rear Axle	1	0	0
S	3101-001	FUEL TANK	Fuel Tank 50 Gallon	1	0	0
S	3102-007	FUEL TANK FILL PORT	Fuel Tank Fill Port LH Rwd/RH Mid	1	0	0

FRONT AXLE

S	2401-002	FRONT AXLE	Frt Axle Meritor MFS 18000# Beam	1	0	0
S	8059-009	FRONT AXLE WARRANTY	Front Axle Warranty Meritor 2013	1	0	0
S	2405-001	FRONT WHEEL BEARING LUBRICATION	Frt Wheel Bearing Lube Oil	1	0	0

FRONT SUSPENSION

S	2502-002	FRONT SHOCK ABSORBERS	Frt Shock Absorbers Bilstein	1	0	0
S	2501-001	FRONT SUSPENSION	Frt Suspension 4 Leaf 13220-18000#	1	0	0

STEERING

S	2601-006	STEERING COLUMN/WHEEL	Steering Column/Wheel Tilt/Telescopic 18" 4 Spoke	1	0	0
S	2603-001	POWER STEERING PUMP	Power Steering Pump TRW	1	0	0
S	2609-002	ELECTRONIC POWER STEERING FLUID LEVEL INDICATOR	Elec Power Steering Fluid Level Indicator	1	0	0
S	2606-006	FRONT AXLE CRAMP ANGLE	Front Axle Cramp Angle 50 Degrees	1	0	0
S	2610-004	POWER STEERING GEAR	Power Steering Gear TRW TAS 85	1	0	0
S	2608-001	CHASSIS ALIGNMENT	Chassis Alignment	1	0	0

REAR AXLE

O	3401-002	REAR AXLE	Rear Axle 24000# Meritor RS-24-160	1	1,313	1,313
S	8061-006	REAR AXLE WARRANTY	Rear Axle Warranty Meritor 2013	1	0	0
S	3403-001	REAR AXLE DIFFERENTIAL LUBRICATION	Rear Axle Differential Lubrication Oil	1	0	0
S	3411-001	REAR WHEEL BEARING LUBRICATION	Rear Wheel Bearing Lubrication Oil	1	0	0
O	3408-008	VEHICLE TOP SPEED	Vehicle Top Speed 68 MPH	1	0	0

REAR SUSPENSION

S	3501-032	REAR SUSPENSION	Rear Susp Reyco 79KB Spring 21000-31500# Conventional	1	0	0
---	----------	-----------------	---	---	---	---

TIRES

O	3601-006	FRONT TIRE	Frt Tire 315/80R 22.5 Michelin XZA1	2	224	448
O	3602-003	REAR TIRE	Rear Tire 11R 22.5 Michelin XDN2	4	286	1,144
O	3413-513	REAR AXLE RATIO	Rear Axle Ratio 5.13	1	0	0
S	3614-011	TIRE PRESSURE INDICATOR	Tire Pressure Ind Frt Dial & Rr Pop Up Voucher	1	0	0

WHEELS

O	3701-010	FRONT WHEEL	Frt Wheel Accuride 22.5 x 9.00 Alum	2	178	356
O	3703-004	REAR WHEEL	Rr Whl Accuride 22.5 x 8.25 Alum	4	222	888
O	3702-004	WHEEL TRIM	Wheel Trim Hub & Nut Covers SS	1	217	217

TIRE CHAINS

O	3801-002	TIRE CHAINS	Tire Chains Rear Axle ON-Spot 6 Strand Auto	1	2,364	2,364
O	3802-002	TIRE CHAINS ACTIVATION	Tire Chains Actv Rkr Sw	1	0	0

BRAKES

O	3205-012	BRAKE SYSTEM	Brake System ABS/ATC/ESC Sgl Axle	1	2,466	2,466
---	----------	--------------	-----------------------------------	---	-------	-------

S	3206-001	FRONT BRAKES	Frt Brakes S-Cam Drum 16.5" x 6"	1	0	0
S	3207-001	REAR BRAKES	Rr Brakes S-Cam Drum 16.5" x 7"	1	0	0
S	3208-001	PARK BRAKE	Prk Brake Rr Wheels Only	1	0	0
S	3204-002	PARK BRAKE CONTROL	Prk Brake Ctrl Ctr Tunnel Mnt	1	0	0
S	3213-001	FRONT BRAKE SLACK ADJUSTERS	Frt Brake Slack Adjusters Meritor	1	0	0
S	3214-001	REAR BRAKE SLACK ADJUSTERS	Rr Brake Slack Adjusters Meritor	1	0	0
O	3211-002	FRONT BRAKE DUST SHIELDS	Frt Brake Dust Shields	1	23	23
O	3212-002	REAR BRAKE DUST SHIELDS	Rr Brake Dust Shields	1	23	23
O	3202-005	AIR DRYER	Air Dryer Wabco System Saver 1200 Bhd LH Batt Box	1	0	0
S	3215-001	FRONT BRAKE CHAMBERS	Frt Brake Chambers MGM Type 30	1	0	0
S	3210-014	REAR BRAKE CHAMBERS	Rr Brake Chambers TSE 30/30	1	0	0

AIR SUPPLY SYSTEMS

S	3320-001	AIR COMPRESSOR	Air Compressor Wabco SS318 18.7 CFM	1	0	0
O	3339-004	AIR GOVERNOR	Air Governor Mnt on Air Dryer Bracket	1	0	0
O	3305-001	AUXILIARY AIR RESERVOIR	Aux Air Reservoir 1200 Cu In	1	143	143
S	3303-001	MOISTURE EJECTORS	Moisture Ejectors Manual	1	0	0
S	3307-001	AIR SUPPLY LINES	Air Sply Lines Nylon	1	0	0
O	3338-001	REAR AIR TANK MOUNTING	Rear Air Tank Mnt Any Bhd Rear Axle Parallel w/Frame	1	0	0

FRAME

S	2103-1900	WHEELBASE	Wheelbase 190.0"	1	0	0
S	2106-0430	REAR OVERHANG	Rear Overhang 43.0"	1	0	0
O	2101-002	FRAME	Frame Double Channel 35.00" Width	1	1,589	1,589
S	8007-009	FRAME WARRANTY	Frame Warranty Lifetime 2013	1	0	0
O	2118-002	REAR TOW DEVICE	Rear Tow Device	1	115	115
O	2110-104	FRAME PAINT	Frame Paint Gloss Black	1	790	790

BUMPER

S	2201-001	FRONT BUMPER	Frt Bumper Stainless Steel Flat	1	0	0
O	2202-006	FRONT BUMPER EXTENSION LENGTH	Frt Bumper Extension Length 24"	1	357	357
O	2226-004	FRONT BUMPER EXTENSION FRAME WIDTH	Frt Bumper Extension Frame Width 48.25"	1	0	0
O	2215-002	FRONT BUMPER SUCTION PROVISION	Frt Bumper Suction Provision 5.0" RH Vertical Outboard	1	1,846	1,846
O	2208-007	FRONT BUMPER APRON	Frt Bumper Apron 24"	1	754	754
O	5501-012	AIR HORN	Air Horn (2) 24" Round Hadley E-Tone	1	574	574
O	2216-004	AIR HORN LOCATION	Air Horn Location (2) Frt Bmpr Face LH	1	0	0
O	2232-002	AIR HORN RESERVOIR	Air Horn Reservoir (1) 1200 Cu In	1	221	221
O	5504-053	ELECTRONIC SIREN SPEAKER	Elect Siren Speaker (2) 100W Cast Products	1	531	531

SA4301 Vertical Orientation

O	2217-007	ELECTRONIC SIREN SPEAKER LOCATION	Elec Siren Speaker Location (2) Frt Bmpr Face RH	1	0	0
O	2203-002	FRONT BUMPER TOW HOOKS	Frt Bumper Tow Hooks Painted Below Fwd	1	0	0

CAB TILT

S	2301-001	CAB TILT SYSTEM	Cab Tilt System	1	0	0
S	2305-001	CAB TILT CONTROL RECEPTACLE	Cab Tilt Ctrl Receptacle Temp	1	0	0

CAB GLASS

S	1401-009	CAB WINDSHIELD	Cab Windshield	1	0	0
S	1402-005	GLASS FRONT DOOR	Glass Frt Dr Roll Down/XDuty Regulator	1	0	0
S	1407-001	GLASS TINT FRONT DOOR	Glass Tint Frt Dr Automotive Green	1	0	0
O	1419-012	GLASS REAR DOOR RIGHT HAND	Glass Rr Dr RH Roll Down/XDuty Regulator	1	0	0
O	1430-001	GLASS TINT REAR DOOR RIGHT HAND	Glass Tint Rr Door RH Automotive Green	1	0	0
O	1412-013	GLASS REAR DOOR LEFT HAND	Glass Rr Dr LH Roll Down/XDuty Regulator	1	0	0
O	1431-001	GLASS TINT REAR DOOR LEFT HAND	Glass Tint Rr Door LH Automotive Green	1	0	0
O	1410-003	GLASS SIDE MID RIGHT HAND	Glass Side Mid RH Fxd 16"W x 26"H	1	0	0
O	1432-001	GLASS TINT SIDE MID RIGHT HAND	Glass Tint Side Mid RH Automotive Green	1	0	0
O	1409-003	GLASS SIDE MID LEFT HAND	Glass Side Mid LH Fxd 16"W x 26"H	1	0	0
O	1433-001	GLASS TINT SIDE MID LEFT HAND	Glass Tint Side Mid LH Automotive Green	1	0	0

CLIMATE CONTROL

O	1614-113	CLIMATE CONTROL	Climate Ctrl Htr Defroster A/C Ovrhd Painted Alum Bus-Air	1	7,993	7,993
O	1632-002	CLIMATE CONTROL DRAIN	Climate Control Drain Gravity	1	0	0
O	1617-103	CLIMATE CONTROL ACTIVATION	Climate Ctrl Actv Rotary Dash Mnt LH	1	0	0
O	1620-002	HVAC OVERHEAD COVER PAINT	HVAC Overhead Cover Paint Zolatone Silver Gray	1	0	0
O	1606-005	AUXILIARY CLIMATE CONTROL FRONT UNDERSEAT	Aux Climate Ctrl Frt Underseat Htr Indv Rkr Sw	1	829	829
O	1603-003	A/C CONDENSER LOCATION	A/C Condenser Location Roof Mnt Fwd Ctr	1	2,272	2,272
O	1601-001	A/C COMPRESSOR	A/C Compressor Large Capacity	1	264	264
O	1608-003	CAB CIRCULATION FANS FRONT	Cab Circulation Fans Frt (2) Inboard	1	261	261
S	1530-001	UNDER CAB INSULATION	Under Cab Insulation Engine Tunnel	1	0	0

CAB INTERIOR

S	1327-001	INTERIOR TRIM FLOOR	Interior Trim Floor	1	0	0
S	1302-001	INTERIOR TRIM	Interior Trim Vinyl	1	0	0

S	1368-002	REAR WALL INTERIOR TRIM	Rear Wall Interior Trim Vinyl	1	0	0
O	1306-006	HEADER TRIM	Header Trim XDuty	1	0	0
S	1305-001	TRIM CENTER DASH	Trim Center Dash ABS	1	0	0
S	1339-101	TRIM LEFT HAND DASH	Trim LH Dash ABS	1	0	0
S	1321-001	TRIM RIGHT HAND DASH	Trim RH Dash ABS Glove Cmpt/MDT Prov	1	0	0
S	1307-002	ENGINE TUNNEL TRIM	Eng Tnl Trim Flr Mat	1	0	0
O	5040-007	POWER POINT DASH MOUNT	Pwr Pnt Dash Mnt Mstr Sw (2)	1	80	80
O	1303-003	STEP TRIM	Step Trim Indented Lwr TPlt Mid	1	62	62
O	1379-003	UNDER CAB ACCESS DOOR	Under Cab Access Door Rear Step LH Painted	1	132	132
S	1102-013	INTERIOR DOOR TRIM	Interior Door Trim Painted	1	0	0
S	1323-001	DOOR TRIM CUSTOMER NAMEPLATE	Door Trim Customer Nameplate	1	0	0
S	1105-001	CAB DOOR TRIM REFLECTIVE	Cab Dr Trim Reflective Vert Stripe/6" Chevron w/Logo	1	0	0
S	1308-001	INTERIOR GRAB HANDLE "A" PILLAR	Interior Grab Handle 'A' Pillar 11" Molded	1	0	0
S	1332-008	INTERIOR GRAB HANDLE FRONT DOOR	Interior Grab Handle Frt Door Horiz 9"	1	0	0
O	1345-002	INTERIOR GRAB HANDLE REAR DOOR	Int Grab Handle Rr Dr Alum Window Span 30" Black Powder Coat	1	117	117
S	1301-003	INTERIOR TRIM VINYL COLOR	Interior Trim Vinyl Color Gray	1	0	0
S	1337-001	INTERIOR TRIM SUNVISOR	Interior Trim Sunvisor Vinyl	1	0	0
S	1318-003	INTERIOR ABS TRIM COLOR	Interior ABS Trim Color Gray	1	0	0
S	1304-001	INTERIOR FLOOR MAT COLOR	Interior Floor Mat Color Gray	1	0	0
S	1335-002	CAB PAINT INTERIOR DOOR TRIM	Cab Paint Int Dr Trim Zolatone Silver Gray	1	0	0
O	1371-002	HEADER TRIM INTERIOR PAINT	Header Trim Interior Paint Zolatone Silver Gray	1	0	0
S	1344-002	DASH PANEL GROUP	Dash Pnl Group 3-Pnl	1	0	0
O	1312-005	SWITCHES CENTER PANEL	Switches Ctr Pnl 12 Up	1	0	0
O	1313-004	SWITCHES LEFT PANEL	Switches Left Pnl 8 (6+2) w/Headlight/Dimmer/Wiper	1	0	0
S	1314-001	SWITCHES RIGHT PANEL	Switches Right Pnl 0	1	0	0

CAB SEATS

S	1225-012	SEAT BELT WARNING	Seat Belt Warn Indv Seat Loc & LED Display w/VDR	1	0	0
O	1237-001	SEAT MATERIAL	Seat Material Ballistic	1	0	0
S	1243-001	SEAT COLOR	Seat Color Gray/Red Seat Belts	1	0	0
S	1249-077	SEAT BACK LOGO	Seat Back Logo Spartan Chassis	6	0	0
O	1201-006	SEAT DRIVER	Seat Driver Bostrom Firefighter 4-Way Air Non-ABTS	1	342	342
O	1213-015	SEAT BACK DRIVER	Seat Back Driver Non-SCBA Non-ABTS	1	0	0
S	1219-001	SEAT MOUNTING DRIVER	Seat Mounting Driver	1	0	0
S	8102-103	OCCUPANT PROTECTION DRIVER	Occupant Protection Driver Advanced Protection System	1	0	0
O	1202-006	SEAT OFFICER	Seat Officer Bostrom Firefighter 4-Way Air Non-ABTS	1	432	432

O	1214-030	SEAT BACK OFFICER	Seat Back Officer SCBA Bostrom SecureAll w/Quick-Adjust	1	671	671
S	1220-002	SEAT MOUNTING OFFICER	Seat Mounting Officer	1	0	0
S	8103-103	OCCUPANT PROTECTION OFFICER	Occupant Protection Officer Advanced Protection System	1	0	0
O	1263-001	SEAT REAR FACING OUTER LOCATION	Seat RFO Location (2) R/L	1	0	0
O	1203-009	SEAT CREW REAR FACING OUTER	Seat Crew RFO Bostrom Firefighter Fixed	2	567	1,134
O	1215-027	SEAT BACK REAR FACING OUTER	Seat Back RFO SCBA Bostrom SecureAll w/Quick-Adjust	2	671	1,342
O	1221-002	SEAT MOUNTING REAR FACING OUTER	Seat Mounting Rear Facing Outer	1	0	0
O	8104-103	OCCUPANT PROTECTION RFO	Occupant Protection RFO Advanced Protection System	1	505	505
O	1273-001	SEAT BELT ORIENTATION CREW	Seat Belt Orientation Crew Outboard Shoulder To Inboard Hip	1	0	0
O	1266-001	SEAT FORWARD FACING CENTER LOCATION	Seat FFC Location (2) Ctr	1	0	0
O	1206-012	SEAT CREW FORWARD FACING CENTER	Seat Crew FFC Bostrom Firefighter Flip-Up	2	754	1,508
O	1218-031	SEAT BACK FORWARD FACING CENTER	Seat Back FFC SCBA Bostrom SecureAll w/Quick-Adjust	2	671	1,342
O	8107-102	OCCUPANT PROTECTION FFC	Occupant Protection FFC Advanced Protection System	1	505	505
O	1269-101	SEAT FRAME FORWARD FACING	Seat Frm Fwd Fcg Dual	1	638	638
O	1281-101	SEAT FRAME FORWARD FACING STORAGE ACCESS	Seat Frm Fwd Fcg Strg Acc Dr (2) R/L Sd	1	138	138
O	1224-002	SEAT MOUNTING FORWARD FACING CENTER	Seat Mounting Forward Facing Center	1	0	0
O	1311-108	CAB FRONT UNDERSEAT STORAGE ACCESS DOOR	Cab Frt Undrst Strg Acc Dr Vented	1	44	44
S	1355-005	SEAT COMPARTMENT DOOR FINISH	Seat Compartment Door Finish Zolatone Silver Gray	1	0	0

CAB EXTERIOR

S	1511-003	WINDSHIELD WIPER SYSTEM	Windshield Wiper System Single Motor	1	0	0
S	1534-002	ELECTRONIC WINDSHIELD FLUID LEVEL INDICATOR	Electronic Windshield Fluid Level Indicator	1	0	0
O	1103-004	CAB DOOR HARDWARE	Cab Door Hardware Chrome w/Scuff Plate	1	776	776
S	1111-001	DOOR LOCKS	Door Locks Manual	1	0	0
O	1503-018	GRAB HANDLES	Grab Handles SS 24"	1	51	51
O	1504-043	REARVIEW MIRRORS	Mirror Bus Style Ramco CRM-310-1350-PCHR	1	281	281
O	1529-004	REARVIEW MIRROR HEAT SWITCH	Rearview Mirror Heat Sw Mirror Ctrl Pnl	1	0	0
O	1506-002	TRIM LOWER SIDE	Trim Lower Side SS 10"H	1	345	345
O	1509-001	TRIM LOWER SIDE FRONT	Trim Lwr Side Frt SS 10" H	1	85	85
O	1525-002	EXTERIOR TRIM REAR CORNER	Exterior Trim Rear Corner Scuff Plate	1	363	363

S	1513-002	CAB FENDER	Cab Fender Alum	1	0	0
O	1526-011	CAB EXTERIOR FRONT & SIDE EMBLEMS	Cab Ext Frt & Side Emblems w/Side Emblem Integrated Model Nameplate	1	0	0
O	1502-026	CAB EXTERIOR MODEL NAMEPLATE	Cab Exterior Model Nameplate Metro Star Advanced Protection System w/Emblem	1	0	0

START / CHARGING SYSTEMS

S	5109-001	IGNITION	Ign Mstr Sw w/Keyless Start	1	0	0
O	5101-002	BATTERY	Batt (6) Group 31 Harris	1	644	644
O	5106-003	BATTERY TRAY	Batt Tray (2) R/L Steel	1	287	287
O	5107-007	BATTERY BOX COVER	Batt Box Cover (2) Steel w/Black Handles	1	136	136
S	5102-001	BATTERY CABLE	Batt Cables	1	0	0
S	5108-002	BATTERY JUMPER STUD	Batt Jumper Stud Frt LH Lwr Step	1	0	0
S	5104-001	ALTERNATOR	Alternator Leece-Neville 270A	1	0	0

LINE VOLTAGE ELECTRICAL POWER DISTRIBUTION

O	5202-024	BATTERY CONDITIONER	Batt Cond Kussmaul 1200 P/P LH RFO Seat Position	1	1,109	1,109
O	5203-002	BATTERY CONDITIONER DISPLAY	Batt Cond Display LH Mid Glass	1	0	0
O	3314-035	AUXILIARY AIR COMPRESSOR	Aux Air Cmp Kussmaul 12V HP Bhd Drv Seat Mnt Horiz	1	882	882
O	5204-055	ELECTRICAL INLET	Elec Inlet 120V 20A Auto Eject	1	430	430
O	5209-002	ELECTRICAL INLET LOCATION	Elec Inlet Location LH Cab Side Mid	1	0	0
O	5210-004	ELECTRICAL INLET CONNECTION	Elec Inlet Conn to Batt Conditioner	1	0	0
O	5206-003	ELECTRICAL INLET COLOR	Elec Inlet Color Red	1	0	0

LIGHTING

S	5301-100	HEADLIGHTS	Headlights 4 Headlamps Halogen	1	0	0
O	5303-005	FRONT TURN SIGNALS	Frt Turn Signals Whelen 600 LED Above Frt Warn	1	187	187
S	5337-001	HEADLIGHT LOCATION	Headlights Below Frt Warn Lts	1	0	0
O	5336-003	SIDE TURN/MARKER LIGHTS	Side Turn/Marker Lts LED	1	79	79
S	5302-003	MARKER & ICC LIGHTS	Marker & ICC Lts Face Mnt LED	1	0	0
S	5350-050	HEADLIGHT AND MARKER LIGHT ACTIVATION	Hdlt & Mrkr Lt Actv Rkr Sw/DRL	1	0	0
O	5308-004	GROUND LIGHTS	Ground Lts LED Resp Dr & Rkr Sw	1	377	377
O	5309-003	STEP LIGHTS	Step Lts LED	1	360	360
S	5312-001	ENGINE COMPARTMENT LIGHT	Engine Cmpt Work Lt (1)	1	0	0
O	5306-049	SIDE SCENE LIGHTS	Side Scene Lts FRC LED900	1	1,262	1,262
O	5318-004	SIDE SCENE LIGHT LOCATION	Side Scene Lt Loc Upper Mid Rwd 10" Roof Position	1	0	0
O	5316-003	SIDE SCENE ACTIVATION	Side Scene Actv Indv Sw	1	0	0
O	5305-152	INTERIOR OVERHEAD LIGHTS	Interior Overhead Lts Weldon	1	0	0

OPTICAL WARNING DEVICES

S	5406-001	DO NOT MOVE APPARATUS LIGHT	Do Not Move App Lt Flashing Red w/Alarm	1	0	0
S	5422-001	MASTER WARNING SWITCH	Mstr Warn Sw Pnl	1	0	0
O	5401-002	INBOARD FRONT WARNING LIGHTS	Inboard Frt Warn Lts Whelen 600 Super LED Chrm Bezel	1	321	321
O	5413-004	INBOARD FRONT WARNING LIGHTS COLOR	Inboard Frt Warn Lts Color Clr	1	116	116
O	5414-002	OUTBOARD FRONT WARNING LIGHTS	Outboard Frt Warn Lts Whelen 600 Super LED Chrm Bezel	1	311	311
O	5415-003	OUTBOARD FRONT WARNING LIGHTS COLOR	Outboard Frt Warn Lts Color Red w/Clr Lens	1	0	0
O	5423-008	FRONT WARNING SWITCH	Frt Warn Sw On w/Lwr Level Sw	1	0	0
O	5404-002	INTERSECTION WARNING LIGHTS	Intersection Warn Lts Whelen 600 Super LED	1	311	311
O	5419-003	INTERSECTION WARNING LIGHTS COLOR	Int Warn Lts Color Red w/Clr Lens	1	0	0
O	5420-002	INTERSECTION WARNING LIGHTS LOCATION	Intersection Warn Lts Location Bumper Tail	1	0	0
O	5402-002	SIDE WARNING LIGHTS	Side Warn Lts Whelen 600 Super LED	1	315	315
O	5418-003	SIDE WARNING LIGHTS COLOR	Side Warn Lts Color Red w/Clr Lens	1	0	0
O	5412-002	SIDE WARNING LIGHTS LOCATION	Side Warn Lts Location Lwr Mid	1	0	0
O	5424-005	SIDE AND INTERSECTION WARNING SWITCH	Side & Intersection Warn Sw On w/Lwr Level Sw	1	0	0
O	5403-050	LIGHTBAR PROVISION	Lightbar Prov Wire & Mnt Spartan Supply	1	518	518
O	5450-003	CAB FRONT LIGHTBAR	Cab Frt Ltbar Whelen Freedom FN72QLED 6R2C Layout 1	1	1,689	1,689
O	5426-009	LIGHTBAR SWITCH	Lightbar Sw Pnl w/Upper Level Sw	1	0	0
O	5407-019	INTERIOR DOOR OPEN WARNING LIGHTS	Int Dr Open Warn Lts Amber Weldon 15" LED Direc Flsh	1	402	402

AUDIBLE WARNING DEVICES

O	5510-004	SIREN CONTROL HEAD	Siren Ctrl Head Whelen 295HFS2	1	565	565
O	5514-002	HORN BUTTON SELECTOR SWITCH	Horn Btn Sel Sw Elec Horn/Air Horn	1	50	50
O	5512-003	AIR HORN ACTIVATION	Air Horn Actv Strg Whl/RH Ft Sw	1	50	50
S	5505-002	BACK-UP ALARM	Back-Up Alarm Ecco 575	1	0	0


INSTRUMENTATION

O	5601-019	INSTRUMENTATION	Instrumentation Standard	1	0	0
S	5624-001	BACKLIGHTING COLOR	Backlighting Color Red	1	0	0

COMMUNICATIONS SYSTEMS

O	5701-003	RADIO	Radio Panasonic WB/AM/FM/CD Ovrhd LH	1	457	457
O	5707-002	AM/FM ANTENNA	AM/FM Antenna LH Fwd Cab Roof	1	0	0
O	5703-010	COMMUNICATION ANTENNA	Comm Ant Base RH Fwd Cab Rf Spartan Sply	1	178	178
O	5708-003	COMMUNICATION ANTENNA	Comm Ant Cable Routing Under Rkr Sw Pnl	1	0	0

Weight Distribution

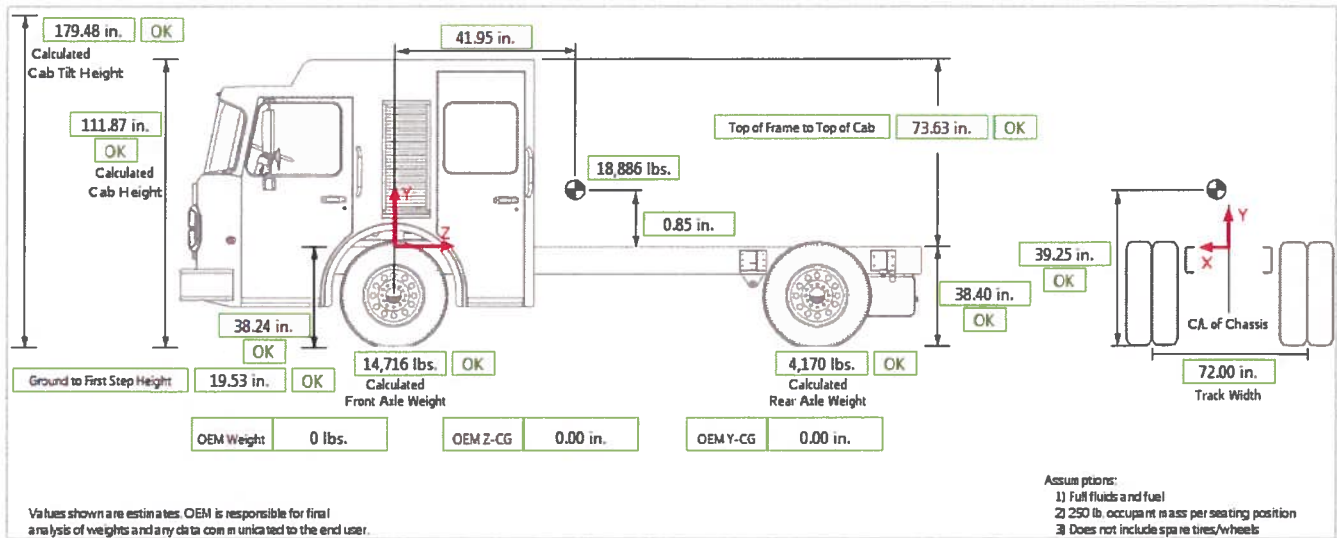

Calculated Apparatus Weight 18,886 lbs.
 Calculated Apparatus Z-CG 41.95 in.
 Calculated Apparatus Y-CG 0.85 in.


Note:

The Y-CG value above is calculated from the top of the frame.
 Apparatus refers to total combined value for cab and chassis and OEM inputs.

Seat Locations



Frame Dimensions

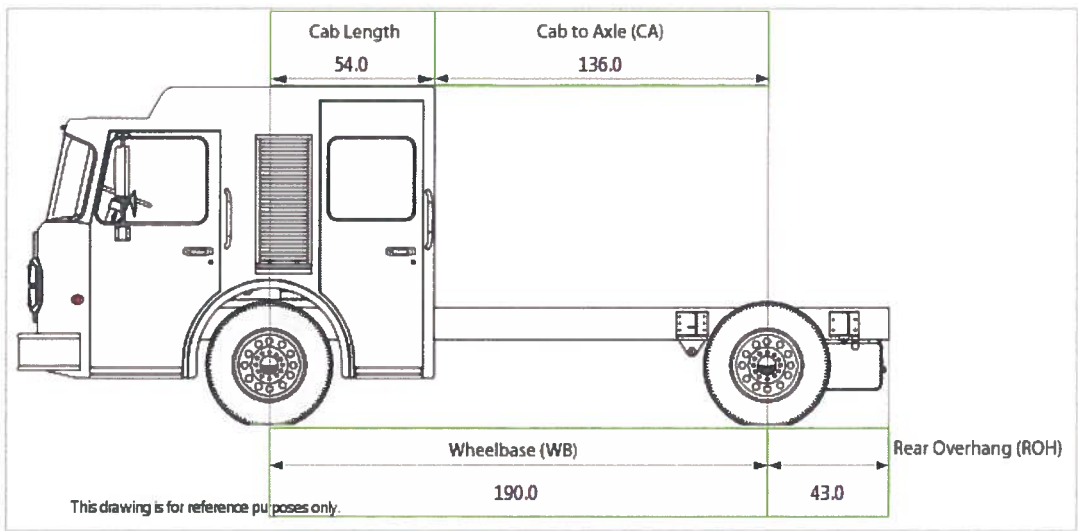

Specification

MODEL

The chassis shall be a Metro Star model. The cab and chassis shall include design considerations for multiple emergency vehicle applications, rapid transit and maneuverability. The chassis shall be manufactured for heavy duty service with the strength and capacity to support a fully laden apparatus, one hundred (100) percent of the time.

MODEL YEAR

The chassis shall have a vehicle identification number that reflects a 2013 model year.

COUNTRY OF SERVICE

The chassis shall be put in service in the country of United States of America (USA).

The chassis will meet applicable U.S.A. federal motor vehicle safety standards per CFR Title 49 Chapter V Part 571 as clarified in the incomplete vehicle book per CFR Title 49 Chapter V Part 568 Section 4 which accompanies each chassis. Spartan Chassis is not responsible for compliance to state, regional, or local regulations. Dealers should identify those regulations and order any necessary optional equipment from Spartan Chassis or their OEM needed to be in compliance with those regulations.

APPARATUS TYPE

The apparatus shall be a pumper vehicle designed for emergency service use which shall be equipped with a permanently mounted fire pump which has a minimum rated capacity of 750 gallons per minute (3000 L/min). The apparatus shall include a water tank and hose body whose primary purpose is to combat structural and associated fires.

VEHICLE TYPE

The chassis shall be manufactured for use as a straight truck type vehicle and designed for the installation of a permanently mounted apparatus behind the cab. The apparatus of the vehicle shall be supplied and installed by the apparatus manufacturer.

AXLE CONFIGURATION

The chassis shall feature a 4 x 2 axle configuration consisting of a single rear drive axle with a single front steer axle.

GROSS AXLE WEIGHT RATINGS FRONT

The front gross axle weight rating (GAWR) of the chassis shall be 18,000 pounds.

This front gross axle weight rating shall be adequate to carry the weight of the completed apparatus including all equipment and personnel.

GROSS AXLE WEIGHT RATINGS REAR

The rear gross axle weight rating (GAWR) of the chassis shall be 24,000 pounds.

This rear gross axle weight rating shall be adequate to carry the weight of the completed apparatus including all equipment and personnel.

PUMP PROVISION

The chassis shall include provisions to mount a drive line pump in the middle of the chassis, behind the cab, more commonly known as the midship location.

CAB STYLE

The cab shall be a custom, fully enclosed, MFD model with a 10.00 inch raised roof over the driver, officer, and crew area, designed and built specifically for use as an emergency response vehicle by a company specializing in cab and chassis design for all emergency response applications. The cab shall be designed for heavy-duty service utilizing superior strength and capacity for the application of protecting the occupants of the vehicle. This style of cab shall offer up to eight (8) seating positions.

The cab shall incorporate a fully enclosed design with side wall roof supports, allowing for a spacious cab area with no partition between the front and rear sections of the cab. To provide a superior finish by reducing welds that fatigue cab metal; the roof, the rear wall and side wall panels shall be assembled using a combination of welds and proven industrial adhesives designed specifically for aluminum fabrication for construction.

The cab shall be constructed using multiple aluminum extrusions in conjunction with aluminum plate, which shall provide proven strength and the truest, flattest body surfaces ensuring less expensive paint repairs if needed. All aluminum welding shall be completed to the American Welding Society and ANSI D1.2-96 requirements for structural welding of aluminum.

All interior and exterior seams shall be sealed for optimum noise reduction and to provide the most favorable efficiency for heating and cooling retention.

The cab shall be constructed of 5052-H32 corrosion resistant aluminum plate. The cab shall incorporate tongue and groove fitted 6061-T6 0.13 & 0.19 inch thick aluminum extrusions for extreme duty situations. A single formed, one (1) piece extrusion shall be used for the "A" pillar, adding strength and rigidity to the cab as well as additional roll-over protection. The cab side walls and lower roof skin shall be 0.13 inch thick; the rear wall and raised roof skins shall be 0.09 inch thick; the front cab structure shall be 0.19 inch thick.

The exterior width of the cab shall be 94.00 inches wide with a minimum interior width of 88.00 inches. The overall cab length shall be 131.10 inches with 54.00 inches from the centerline of the front of the axle to the back of the cab.

The cab interior shall be designed to afford the maximum usable interior space and attention to ergonomics with hip and legroom while seated which exceeds industry standards. The crew cab floor shall be flat across the entire walking area for ease of movement inside the cab.

The cab shall offer an interior height of 57.50 inches from the front floor to the headliner in the non-raised roof area and a rear floor to headliner height of 65.00 inches in the raised roof area, at a minimum. The cab shall offer an interior measurement at the floor level from the rear of the engine tunnel to the rear wall of the cab of 49.88 inches. All interior measurements shall include the area within the interior trimmed surfaces and not to any unfinished surface.

The cab shall include a driver and officer area with two (2) cab doors large enough for personnel in full firefighting gear. The front doors shall offer a clear opening of 40.25 inches wide X 53.50 inches high, from the cab floor to the top of the door opening. The cab shall also include a crew area with up to two (2) cab doors, also large enough for personnel in full firefighting gear. The rear doors shall offer a clear opening of 32.25 inches wide X 61.00 inches high, from the cab floor to the top of the door opening.

The cab shall incorporate a progressive two (2) step configuration from the ground to the cab floor at each door opening. The progressive steps are vertically staggered and extend the full width of each step well allowing personnel in full firefighting gear to enter and exit the cab easily and safely.

The first step for the driver and officer area shall measure approximately 11.50 inches deep X 31.50 inches wide. The intermediate step shall measure approximately 8.50 inches deep X 33.00 inches wide. The height from the first step to the intermediate step and the intermediate step to the cab floor shall not exceed 11.00 inches.

The first step for the crew area shall measure approximately 11.50 inches deep X 21.50 inches wide. The intermediate step shall measure approximately 10.25 inches deep X 22.50 inches wide. The height from the first step to the intermediate step and the intermediate step to the cab floor shall not exceed 12.50 inches.

OCCUPANT PROTECTION

The vehicle shall include the Advanced Protection System™ (APS) which shall secure belted occupants and increase the survivable space within the cab. The APS shall selectively deploy integrated systems to protect against injuries in qualifying frontal impact, side impact, and rollover events. The increase in survivable space and security of the APS shall also provide ejection mitigation protection.

The system components shall include:

- Driver steering wheel airbag
- Driver dual knee air bags (patent pending) with energy management mounting (patent pending) and officer knee airbag.
- Large driver, officer, and crew area side curtain airbags
- APS advanced seat belt system - retractor pre-tensioners tighten the seat belts around the occupants, securing the occupants in seats and load limiters play out some of the seat belt webbing to reduce seat belt to chest and torso force upon impact as well as mitigate head and neck injuries
- Heavy truck Restraints Control Module (RCM) - receives inputs from the outboard sensors, selectively deploys APS systems, and records sensory inputs immediately before and during a detected qualifying event
- Integrated outboard crash sensors mounted at the perimeter of the vehicle - detects a qualifying front or side impact event and monitors and communicates vehicle status and real time diagnostics of all critical subsystems to the RCM

- Fault-indicating Supplemental Restraint System (SRS) light on the driver's instrument panel

Frontal impact protection shall be provided by the outboard sensors and the RCM. In a qualifying front impact event the outboard sensors provide inputs to the RCM. The RCM activates the steering wheel airbag, driver side dual knee airbags (patent pending), officer side knee airbag, and advanced seat belts for each occupant in the cab.

The APS frontal impact system shall be independently tested to ensure occupant injury criteria does not exceed injury criteria defined in Federal Motor Vehicle Safety Standard (FMVSS) 208. Frontal impact into a rigid barrier at 25 mph shall be conducted by an independent third party test facility using belted 95th percentile Hybrid II test dummies.

Rollover, side impact, and ejection mitigation shall be provided by the outboard sensors and the RCM. In qualifying rollover or side impact events the outboard sensors provide inputs to the RCM. The RCM activates the side curtain airbags and advanced seat belts for each occupant in the cab. The RCM measures roll angle, lateral acceleration, and roll rate to determine if a rollover event or side impact event is imminent or occurring.

In the event of a qualifying offset or other non-frontal impact, the RCM shall determine and intelligently deploy the front impact protection system, the side impact protection system, or both front and side impact protection systems based on the inputs received from the outboard crash sensors.

The APS side impact system shall be independently tested to ensure occupant injury criteria does not exceed injury criteria defined in Federal Motor Vehicle Safety Standard (FMVSS) 214. Side impact from a moving barrier at 17 mph shall be conducted by an independent third party test facility using belted 50th percentile ES-2re test dummies.

CAB FRONT FASCIA

The front cab fascia shall be constructed of 5052-H32 Marine Grade, 0.13 of an inch thick aluminum plate which shall be an integral part of the cab.

The cab fascia will encompass the entire front of the aluminum cab structure from the bottom of the windshield to the bottom of the cab and shall be the "Classic" design.

The front cab fascia shall include two (2) molded plastic modules on each side accommodating a total of up to four (4) Hi/Low beam headlights and two (2) turn signal lights or up to four (4) warning lights. A chrome plated molded plastic bezel shall be provided on each side around each set of four lamps.

FRONT GRILLE

The front fascia shall include a box style, 304 stainless steel front grille 44.45 inches wide X 33.50 inches high X 1.50 inches deep. The grille shall include a minimum free air intake of 732.00 square inches.

CAB UNDERCOAT

There shall be a rubberized undercoating applied to the underside of the cab that provides abrasion protection, sound deadening and corrosion protection.

CAB SIDE DRIP RAIL

There shall be a drip rail along the top radius of each cab side. The drip rails shall help prevent water from the cab roof running down the cab side.

CAB PAINT EXTERIOR

The cab shall be painted prior to the installation of glass accessories and all other cab trim to ensure complete paint coverage and the maximum in corrosion protection of all metal surfaces.

All metal surfaces on the entire cab shall be ground by disc to remove any surface oxidation or surface debris which may hinder the paint adhesion. Once the surface is machine ground a high quality acid etching of base primer shall be applied. Upon the application of body fillers and their preparation, the cab shall be primed with a coating designed for corrosion resistance and surface paint adhesion. The maximum thickness of the primer coat shall be 2.00 mils.

The entire cab shall then be coated with an intermediate solid or epoxy surfacing agent that is designed to fill any minor surface defects, provide an adhesive bond between the primer and the paint and improve the color and gloss retention of the color. The finish to this procedure shall be a sanding of the cab with 360 grit paper followed by sealing the seams with SEM brand seam sealer.

The cab shall then be painted the specific color designated by the customer with an acrylic urethane type system designed to retain color and resist acid rain and most atmospheric chemicals found on the fire ground or emergency scene. The paint shall have a minimum thickness of 2.00 mils, followed by a clear top coat not to exceed 2.00 mils. The entire cab shall then be baked at 180 degrees for one (1) hour to speed the curing process of the coatings.

CAB PAINT MANUFACTURER

The cab shall be painted with PPG Industries paint.

CAB PAINT PRIMARY/LOWER COLOR

The primary/lower paint color shall be PPG FBCH 74187 red.

CAB PAINT WARRANTY

The cab and chassis shall be covered by a limited manufacturer paint warranty which shall be in effect for ten (10) years from the first owner's date of purchase or in service or the first 100,000 actual miles, whichever occurs first.

CAB PAINT INTERIOR

The visible interior cab structure surfaces shall be painted with a Zolatone #20-72 silver gray texture finish.

CAB ENTRY DOORS

The cab shall include four (4) entry doors, two (2) front doors and two (2) crew doors designed for ease of entering and egress when outfitted with an SCBA. The doors shall be constructed of extruded aluminum with a nominal thickness of 0.13 inch. The exterior skins shall be constructed of 0.13 inch aluminum plate.

The doors shall include a double rolled style automotive rubber seal around the perimeter of each door frame and door edge which ensures a weather tight fit.

All door hinges shall be hidden within flush mounted cab doors for a pleasing smooth appearance and perfect fit along each side of the cab. Each door hinge shall be piano style with a 0.38 inch pin and shall be constructed of stainless steel.

CAB ENTRY DOOR TYPE

All cab entry doors shall be full length in design to fully enclose the lower cab steps.

CAB INSULATION

The cab ceiling and walls shall include 1.00 inch thick foam insulation. The insulation shall act as a barrier absorbing noise as well as assisting in sustaining the desired climate within the cab interior.

CAB STRUCTURAL WARRANTY

The cab structure shall be warranted for a period of ten (10) years or one hundred thousand (100,000) miles which ever may occur first. Warranty conditions may apply and shall be listed in the detailed warranty document that shall be provided upon request.

CAB TEST INFORMATION

The cab shall have successfully completed the preload side impact, static roof load application and frontal impact without encroachment to the occupant survival space when tested in accordance with Section 4 of SAE J2420 COE Frontal Strength Evaluation Dynamic Loading Heavy Trucks, Section 5 of SAE J2422 Cab Roof Strength Evaluation Quasi –Static Loading Heavy Trucks and ECE R29 Uniform Provisions Concerning the Approval of Vehicles with regard to the Protection of the Occupants of the Cab of a Commercial Vehicles Annex 3 Paragraph 5.

The above tests have been witnessed by and attested to by an independent third party. The test results were recorded using cameras, high speed imagers, accelerometers and strain gauges. Documentation of the testing shall be provided upon request.

ELECTRICAL SYSTEM

The chassis shall include a single starting electrical system which shall include a 12 volt direct current system, suppressed per SAE J551. The wiring shall be appropriate gauge cross link with 311 degree Fahrenheit insulation. All SAE wires in the chassis shall be color coded and shall include the circuit number and function where possible. The wiring shall be protected by 275 degree Fahrenheit minimum high temperature flame retardant loom.

APPARATUS WIRING PROVISION

An apparatus wiring panel shall be installed in the center dash area behind the rocker switch panel which shall include eight (8) open circuits consisting of three (3) 20 amp, one (1) 30 amp, three (3) 10 amp, and one (1) 15 amp circuit, with relays and breakers with trigger wires which shall be routed to the rocker switch panel.

LOAD MANAGEMENT SYSTEM

The apparatus shall be equipped with a Class 1 Total System Manager (TSM) for performing electrical load management. The TSM shall have sixteen (16) programmable outputs to supply warning and load switching requirements. Outputs one (1) through twelve (12) shall be independently programmable to activate during the scene mode, the response mode, or both. These outputs can also be programmed to activate with the ignition or master warning switch, or to sequence and shed along with the priority. Output thirteen (13) shall be designated to activate a fast idle system. Output fourteen (14) shall provide

a low voltage warning for an isolated battery. Output fifteen (15) is a user configurable output and shall be programmable for activating between 10.50 and 15.00 volts. Output sixteen (16) shall provide a low voltage alarm that activates at the NFPA required 11.80 volts. The TSM shall have a digital display to indicate system voltage in normal operation mode and also indicate the output configuration during programming mode. The TSM shall be protected against reverse polarity and shorted outputs and be enclosed in a metal enclosure to enhance EMI/RFI protection.

DATA RECORDING SYSTEM

The chassis shall have a Class One Vehicle Data Recorder (VDR) system installed. The system shall be designed to meet NFPA 1901. The following information shall be recorded:

- Vehicle Speed
- Acceleration
- Deceleration
- Engine Speed
- Engine Throttle Position
- ABS Event
- Seat Occupied Status
- Seat Belt Status
- Master Optical Warning Device Switch Position
- Time
- Date

Each portion of the data shall be recorded at the specified intervals and stored for the specified length of time to meet NFPA 1901 guidelines and shall be retrievable by connecting a laptop computer to the VDR system. The laptop connection shall be a panel mounted female type B USB connection point, remotely mounted in the left side foot well of the cab.

ACCESSORY POWER

The electrical distribution panel shall include two (2) power studs. The studs shall be size #10 and each of the power studs shall be circuit protected with a fuse of the specified amperage. One (1) power stud shall be capable of carrying up to a 40 amp battery direct load. One (1) power stud shall be capable of carrying up to a 15 amp ignition switched load. The two (2) power studs shall share one (1) #10 ground stud.

EXTERIOR ELECTRICAL TERMINAL COATING

All terminals exposed to the elements will be sprayed with a high visibility protective rubberized coating to prevent corrosion.

ENGINE

The chassis engine shall be a Cummins ISL9 engine. The ISL9 engine shall be an in-line six (6) cylinder, four cycle diesel powered engine. The engine shall offer a rating of 450 horse power at 2100 RPM and shall be governed at 2200 RPM. The torque rating shall feature 1250 foot pounds of torque at 1400 RPM with 543 cubic inches (8.9 liters) of displacement.

The ISL9 engine shall feature a VGT™ Turbocharger, a high pressure common rail fuel system, fully integrated electronic controls with an electronic governor, and shall be EPA certified to meet the 2013 emissions standards using cooled exhaust gas recirculation and selective catalytic reduction technology.

The engine shall include an engine mounted combination full flow/by-pass oil filter with replaceable spin on cartridge for use with the engine lubrication system. The engine shall include Citgo brand Citgard 500, or equivalent SAE 15W40 CJ4 low ash engine oil which shall be utilized for proper engine lubrication.

A wiring harness shall be supplied ending at the back of the cab. The harness shall include a connector which shall allow an optional harness for the pump panel. The included circuits shall be provided for a tachometer, oil pressure, engine temperature, hand throttle, high idle and a PSG system. A circuit for J1939 data link shall also be provided at the back of the cab.

CAB ENGINE TUNNEL

The cab interior shall include an integrated engine tunnel constructed of 5052-H32 Marine Grade, 0.19 of an inch thick aluminum. The tunnel shall be a maximum of 41.50 inches wide X 25.50 inches high.

DIESEL PARTICULATE FILTER CONTROLS

There shall be two (2) controls for the diesel particulate filter. One (1) control shall be for regeneration and one (1) control shall be for regeneration inhibit.

ENGINE PROGRAMMING HIGH IDLE SPEED

The engine high idle control shall maintain the engine idle at approximately 1250 RPM when engaged.

ENGINE HIGH IDLE CONTROL

The vehicle shall be equipped with an automatic high-idle speed control. It shall be pre-set so when activated, it will operate the engine at the appropriate RPM to increase alternator output. This device shall operate only when the master switch is activated and the transmission is in neutral with the parking brake set. The device shall disengage when the operator depresses the brake pedal, or the transmission is placed in gear, and shall be available to manually or automatically re-engage when the brake is released, or when the transmission is placed in neutral.

ENGINE PROGRAMMING ROAD SPEED GOVERNOR

The engine programming which governs the top speed of the vehicle shall be disabled.

AUXILIARY ENGINE BRAKE

A compression brake, for the six (6) cylinder engine shall be provided. A cutout relay shall be installed to disable the compression brake when in pump mode or when an ABS event occurs. The engine compression brake shall activate upon 0% accelerator when in operation mode and actuate the vehicle's brake lights.

The engine shall utilize a variable geometry turbo (VGT) as an integrated auxiliary engine brake to offer a variable rate of exhaust flow, which when activated in conjunction with the compression brake shall enhance the engine's compression braking capabilities.

AUXILIARY ENGINE BRAKE CONTROL

An engine compression brake control device shall be included. The electronic control device shall monitor various conditions and shall activate the engine brake only if all of the following conditions are simultaneously detected:

- A valid gear ratio is detected.
- The driver has requested or enabled engine compression brake operation.
- The throttle is at a minimum engine speed position.

- The electronic controller is not presently attempting to execute an electronically controlled final drive gear shift.

The compression brake shall be controlled through an on/off switch and a low/medium/high selector switch.

ELECTRONIC ENGINE OIL LEVEL INDICATOR

The engine oil shall be monitored electronically and shall send a signal to activate a warning in the instrument panel when levels fall below normal. The warning shall activate in a low oil situation upon turning on the master battery and ignition switches without the engine running.

FLUID FILLS

The front of the chassis shall accommodate fluid fill for the engine oil through the grille. This area shall also accommodate a check for the engine oil. The transmission, power steering, and coolant fluid fills and checks shall be under the cab. The windshield washer fill shall be accessible through the front left side mid step.

ENGINE DRAIN PLUG

The engine shall include an original equipment manufacturer installed oil drain plug.

ENGINE WARRANTY

The Cummins engine shall be warranted for a period of five (5) years or 100,000 miles, whichever occurs first.

REMOTE THROTTLE HARNESS

An apparatus interface wiring harness for the engine shall be supplied with the chassis. The midship harness shall include a connector for connection to the chassis harness which shall terminate in the left frame rail behind the cab for reconnection by the apparatus builder. The midship harness shall contain connectors for a Class 1 Total Pressure Governor and a multiplexed gauge. Separate circuits shall be included for pump controls, "Pump Engaged" and "OK to Pump" indicator lights, open compartment ground, start signal, park brake ground, ignition signal, master power, customer ignition, air horn solenoid switch, high idle switch and high idle indication light. The harness shall be designed for a side mount pump panel.

An apparatus interface wiring harness shall also be included which shall be wired to the cab harness interface connectors and shall incorporate circuits with relays to control pump functions. This harness shall control the inputs for the transmission lock up circuits, governor/hand throttle controls and dash display which shall incorporate "Pump Engaged" and "OK to Pump" indicator lights. The harness shall contain circuits for the apparatus builder to wire in a pump switch.

ENGINE PROGRAMMING REMOTE THROTTLE

The engine ECM (Electronic Control Module) discreet wire remote throttle circuit shall be turned off for use with a J1939 based pump controller or when the discreet wire remote throttle controls are not required.

CRUISE CONTROL

The chassis will be provided with a cruise control system. The cruise control system shall have a turn signal stack switch incorporated into the steering column for the driver interface. The switch shall

control the engine inputs for cruise on/off, and set/resume/accelerate. The brake pedal activation shall deactivate cruise operation.

ENGINE PROGRAMMING IDLE SPEED

The engine low idle speed will be programmed at 700 rpm.

ENGINE FAN DRIVE

The engine cooling system fan shall incorporate a thermostatically controlled, Horton clutched type fan drive.

When the clutched fan is disengaged it shall facilitate improved vehicle performance, cab heating in cold climates, and fuel economy. The fan clutch design shall be fail safe so that if the clutch drive fails the fan shall engage to prevent engine overheating due to the fan clutch failure.

ENGINE COOLING SYSTEM

There shall be a heavy-duty aluminum cooling system designed to meet the demands of the emergency response industry. The cooling system shall have the capacity to keep the engine properly cooled under all conditions of road and pumping operations. The cooling system shall be designed and tested to meet or exceed the requirements specified by the engine and transmission manufacturer and all EPA requirements. The complete cooling system shall be mounted to isolate the entire system from vibration or stress. The individual cores of the cooling system shall be mounted in a manner to allow expansion and contraction at various rates without inducing stress into the adjoining cores.

The cooling system shall utilize a charge air cooler to radiator serial flow package that provides the maximum cooling capacity for the specified engine as well as serviceability. The main components shall include a surge tank, an air to air charge air cooler bolted to the front of the radiator, recirculation shields, a shroud, a fan, and required tubing.

The radiator shall be a down-flow design constructed with aluminum cores, plastic end tanks, and a steel frame. The radiator shall be equipped with a drain cock to drain the coolant for serviceability.

The cooling system shall include a one piece injection molded polymer eleven (11) blade fan with a fiberglass fan shroud.

The cooling system shall be equipped with a surge tank that is capable of removing entrained air from the system. The surge tank shall be equipped with a low coolant probe and sight glass to monitor the level of the coolant. The surge tank shall have a dual seal cap that meets the engine manufacturer's pressure requirements, and allows for expansion and recovery of coolant into a separate integral expansion chamber.

All radiator tubes shall be formed from aluminized steel tubing. Recirculation shields shall be installed where required to prevent heated air from reentering the cooling package and affecting performance.

The charge air cooler shall be a cross-flow design constructed completely of aluminum with cast tanks. All charge air cooler tubes shall be formed from aluminized steel tubing and installed with silicone hump hoses and stainless steel "constant torque" style clamps meeting the engine manufacturer's requirements.

ENGINE COOLING SYSTEM PROTECTION

The engine cooling system shall include a recirculation shield designed to act as a light duty skid plate below the radiator to provide additional protection for the engine cooling system from light impacts, stones, and road debris.

ENGINE COOLANT

The cooling package shall include Extended Life Coolant (ELC). The use of ELC provides longer intervals between coolant changes over standard coolants providing improved performance. The coolant shall contain a 50/50 mix of ethylene glycol and de-ionized water to keep the coolant from freezing to a temperature of -34 degrees Fahrenheit.

Proposals offering supplemental coolant additives (SCA) shall not be considered, as this is part of the extended life coolant makeup.

ENGINE COOLANT FILTER

An engine coolant filter with a shut-off valve for the inlet and outlet shall be installed on the chassis. The location of the filter shall allow for easy maintenance.

Proposals offering engines equipped with coolant filters shall be supplied with standard non-chemical type particulate filters.

ELECTRONIC COOLANT LEVEL INDICATOR

The instrument panel shall feature a low engine coolant indicator light which shall be located in the center of the instrument panel. An audible tone alarm shall also be provided to warn of a low coolant incident.

ENGINE PUMP HEAT EXCHANGER

A single bundle type coolant to water heat exchanger shall be installed between the engine and the radiator. The heat exchanger shall be designed to prohibit water from the pump from coming in contact with the engine coolant. This shall allow the use of water from the discharge side of the pump to assist in cooling the engine.

COOLANT HOSES

The cooling system hoses shall be silicone heater hose with rubber hoses in the cab interior. The radiator hoses shall be formed silicone coolant hoses with formed aluminized steel tubing. All heater hose, silicone coolant hose, and tubing shall be secured with stainless steel constant torque band clamps.

ENGINE AIR INTAKE FILTER AND RESTRICTION W/REPLACEABLE ELEMENT

The engine air intake system shall include an ember separator air intake filter which shall be located in the front of the cab behind the right hand side fascia. This filter shall protect the downstream air filter from embers using a combination of unique flat and crimped metal screens constructed into a corrosion resistant steel frame. This multilayered screen shall be designed to trap embers or allow them to burn out before passing through the pack, while creating only minimal air flow restriction through the system. Periodic cleaning or replacement of the screen shall be all that is required after installation.

The engine shall also include an air intake filter which shall be bolted to the frame and located under the front of the cab on the right hand side. The system shall utilize a replaceable dry type filter which ensures dust and debris remains safely contained inside the housing during operation via leak-tight seals.

The service cover shall be located on the bottom of the housing, eliminating the chance of contaminating the air intake system during air filter service.

The air flow distribution and dust loading shall be uniform throughout the high-performance filter element, which shall result in pressure differential for improved horsepower and fuel economy. The air intake ember separator shall be mounted within easy access via a hinged panel behind the right hand side headlight module. The air intake system shall include a restriction indicator light in the warning light cluster on the instrument panel, which shall activate when the air cleaner element requires replacement.

AIR INTAKE PROTECTION

A light duty skid plate shall be supplied for the engine air intake system below the right front side of the cab. The skid plate shall provide protection for the air intake system from light impacts, stones, and road debris.

ENGINE EXHAUST SYSTEM

The exhaust system shall include a diesel particulate filter (DPF), a diesel oxidation catalyst, and a selective catalytic reduction catalyst (SCR) to meet current EPA standards. The selective catalytic reduction catalyst utilizes a diesel exhaust fluid solution consisting of urea and purified water to convert NOx into nitrogen, water, and trace amounts of carbon dioxide. The solution shall be injected into the system through the decomposition tube between the DPF and SCR.

The system shall utilize 0.07 inch thick stainless steel exhaust tubing between the engine turbo and the DPF. Zero leak clamps seal all system joints between the turbo and DPF.

The DPF, the decomposition tube, and the SCR canister through the end of the tailpipe shall be connected with zero leak clamps. The discharge shall terminate horizontally on the right side of the vehicle ahead of the rear tires.

The exhaust system shall be mounted under the frame with the DPF and the SCR canisters horizontally stacked with the SCR inboard of the DPF.

DIESEL EXHAUST FLUID TANK

The exhaust system shall include a molded cross linked polyethylene tank for Diesel Exhaust Fluid (DEF). The tank shall have a capacity of six (6) usable gallons and shall be mounted on the left hand side of the chassis frame behind the batteries below the frame.

The DEF tank shall be designed with capacity for expansion in case of fluid freezing. Engine coolant, which shall be thermostatically controlled, shall be run through lines in the tank to help prevent the DEF from freezing and to provide a means of thawing the fluid if it should become frozen.

The tank fill tube shall be routed under the rear of the cab with the fill neck and splash guard accessible in the top rear step.

ENGINE EXHAUST ACCESSORIES

An exhaust temperature mitigation device shall be shipped loose for installation by the body manufacturer on the vehicle. The temperature mitigation device shall lower the temperature of the exhaust by combining ambient air with the exhaust gasses at the exhaust outlet.

ENGINE EXHAUST WRAP

The exhaust tubing between the engine turbo and the diesel particulate filter (DPF) shall be wrapped with a thermal cover in order to retain the necessary heat for DPF regeneration. The exhaust wrap shall also help protect surrounding components from radiant heat which can be transferred from the exhaust.

TRANSMISSION

The drive train shall include an Allison model EVS 3000 torque converting, automatic transmission which shall include electronic controls. The transmission shall feature two (2) 10-bolt PTO pads located on the converter housing.

The transmission shall include two (2) internal oil filters and Castrol TranSynd™ synthetic TES 295 transmission fluid which shall be utilized in the lubrication of the EVS transmission. An electronic oil level sensor shall be included with the readout located in the shift selector.

The transmission gear ratios shall be:

1st	3.49:1
2nd	1.86:1
3rd	1.41:1
4th	1.00:1
5th	0.75:1
6th	0.65:1 (if applicable)
Rev	5.03:1

TRANSMISSION MODE PROGRAMMING

The transmission, upon start-up, will select five (5) speeds of operation. The sixth speed over drive shall be available with the activation of the mode button on the shifting pad.

TRANSMISSION FEATURE PROGRAMMING

The Allison Gen V-E transmission EVS group package number 127 shall contain the 198 vocational package in consideration of the duty of this apparatus as a pumper. This package shall incorporate an automatic neutral with selector override. This feature commands the transmission to neutral when the park brake is applied, regardless of drive range requested on the shift selector. This requires re-selecting drive range to shift out of neutral for the override.

This package shall be coupled with the use of a split shaft PTO and incorporate pumping circuits. These circuits shall be used allowing the vehicle to operate in the fourth range lockup while operating the pump mode due to the 1 to 1 ratio through the transmission, therefore the output speed of the engine is the input speed to the pump. The pump output can be easily calculated by using this input speed and the drive ratio of the pump itself to rate the gallons of water the pump can provide.

A transmission interface connector shall be provided in the cab. This package shall contain the following input/output circuits to the transmission control module. The Gen V-E transmission shall include prognostic diagnostic capabilities. These capabilities shall include the monitoring of the fluid life, filter change indication, and transmission clutch maintenance.

<u>Function ID</u>	<u>Description</u>	<u>Wire assignment</u>
Inputs		
C	PTO Request	142
J	Fire Truck Pump Mode (4th Lockup)	122 / 123

Outputs

C	Range Indicator	145 (4th)
G	PTO Enable Output	130
	Signal Return	103

TRANSMISSION SHIFT SELECTOR

An Allison pressure sensitive range selector touch pad shall be provided and located to the right of the driver within clear view and easy reach. The shift selector shall have a graphical Vacuum Florescent Display (VFD) capable of displaying two lines of text. The shift selector shall provide mode indication and a prognostic indicator (wrench symbol) on the digital display. The prognostics monitor various operating parameters and shall alert you when a specific maintenance function is required.

ELECTRONIC TRANSMISSION OIL LEVEL INDICATOR

The transmission fluid shall be monitored electronically and shall send a signal to activate a warning in the instrument panel when levels fall below normal.

TRANSMISSION PRE-SELECT WITH AUXILIARY BRAKE

When the auxiliary brake is engaged, the transmission shall automatically shift to second gear to decrease the rate of speed assisting the secondary braking system and slowing the vehicle.

TRANSMISSION COOLING SYSTEM

The transmission shall include a water to oil cooler system located in the cooling loop between the radiator and the engine. The transmission cooling system shall meet all transmission manufacturer requirements. The transmission cooling system shall feature continuous flow of engine bypass water to maintain uninterrupted transmission cooling.

TRANSMISSION DRAIN PLUG

The transmission shall include an original equipment manufacturer installed oil drain plug.

TRANSMISSION WARRANTY

The Allison EVS series transmission shall be warranted for a period of five (5) years with unlimited mileage. Parts and labor shall be included in the warranty.

DRIVELINE

All drivelines shall be heavy duty metal tube and equipped with Spicer 1710 series universal joints. The shafts shall be dynamically balanced prior to installation to alleviate future vibration. In areas of the driveline where a slip shaft is required, the splined slip joint shall be coated with Glide Coat®.

MIDSHIP PUMP / GEARBOX

A mid-ship split shaft pump shall be installed by the apparatus manufacturer. The chassis manufacturer shall not provide any driveline provisions for the pump installation.

FUEL FILTER/WATER SEPARATOR

The fuel system shall have a Fleetguard FS1003 fuel filter/water separator as a primary filter. The fuel filter shall have a drain valve.

A water in fuel sensor shall be provided and wired to an instrument panel lamp and audible alarm to indicate when water is present in the fuel/water separator.

A secondary fuel filter shall be included as approved by the engine manufacturer.

FUEL LINES

The fuel system supply and return lines installed from the fuel tank to the engine shall be black textile braided lines which are reinforced with braided high tensile steel wire. The fuel lines shall be connected with reusable steel fittings.

ELECTRIC FUEL PRIMER

Integral to the engine assembly is an electric lift pump that serves the purpose of pre-filter fuel priming.

FUEL COOLER

An aluminum cross flow air to fuel cooler shall be provided to lower fuel temperature allowing the vehicle to operate at higher ambient temperatures. The fuel cooler shall be located behind the rear axle.

FUEL TANK

The fuel tank shall have a capacity of fifty (50) gallons and shall measure 35.00 inches in width X 15.00 inches in height X 24.00 inches in length. The baffled tank shall be made of 14 gauge aluminized steel. The exterior of the tank shall be painted with a PRP Corsol™ black anti-corrosive exterior metal treatment finish. This results in a tank which offers the internal and external corrosion resistance.

The tank shall have a vent port to facilitate venting to the top of the fill neck for rapid filling without "blow-back" and a roll over ball check vent for temperature related fuel expansion and draw.

The tank is designed with dual draw tubes and sender flanges. The tank shall have 2.00 inch NPT fill ports for right or left hand fill. A 0.50 inch NPT drain plug shall be centered in the bottom of the tank.

The fuel tank shall be mounted below the frame, behind the rear axle. Two (2) three-piece strap hanger assemblies with "U" straps bolted midway on the fuel tank front and rear shall be utilized to allow the tank to be easily lowered and removed for service purposes. Rubber isolating pads shall be provided between the tank and the upper tank mounting brackets. Strap mounting studs through the rail, hidden behind the body shall not be acceptable.

FUEL TANK FILL PORT

The fuel tank fill ports shall be offset with the left fill port located in the rearward position and the right fill port located in the middle position on the fuel tank.

FRONT AXLE

The front axle shall be a Meritor Easy Steer Non drive front axle, model number MFS-18. The axle shall include a 3.74 inch drop and a 71.00 inch king pin intersection (KPI). The axle shall include a conventional style hub with a standard knuckle. The weight capacity for the axle shall be rated to 18,000 pounds.

FRONT AXLE WARRANTY

The front axle shall be warranted by Meritor for two (2) years with unlimited miles under the general service application. Details of the Meritor warranty are provided on the PDF document attached to this option.

FRONT WHEEL BEARING LUBRICATION

The front axle wheel bearings shall be lubricated with oil. The oil level can be visually checked via clear inspection windows in the front axle hubs.

FRONT SHOCK ABSORBERS

Two (2) Bilstein inert, nitrogen gas filled shock absorbers shall be provided and installed as part of the front suspension system. The shocks shall be a monotubular design and fabricated using a special extrusion method, utilizing a single blank of steel without a welded seam, achieving an extremely tight peak-to-valley tolerance and maintains consistent wall thickness. The monotubular design shall provide superior strength while maximizing heat dissipation and shock life.

The ride afforded through the use of a gas shock is more consistent and shall not deteriorate with heat, the same way a conventional oil filled hydraulic shock would.

The Bilstein front shocks shall include a digressive working piston assembly allowing independent tuning of the compression and rebound damping forces to provide optimum ride and comfort without compromise. The working piston design shall feature fewer parts than most conventional twin tube and "road sensing" shock designs and shall contribute to the durability and long life of the Bilstein shock absorbers.

Proposals offering the use of conventional twin tube or "road sensing" designed shocks shall not be considered.

FRONT SUSPENSION

The front suspension shall include a four (4) leaf spring pack consisting of 54.00 inch long and 4.00 inch wide taper leaf springs and shall feature a military double wrapped front eye. Both spring eyes shall have a case hardened threaded bushing installed with lubrication counter bore and lubrication land off cross bore with grease fitting. The spring capacity shall be rated at 18,000 pounds.

STEERING COLUMN/ WHEEL

The cab shall include a Douglas Autotech steering column which shall include a seven (7) position tilt, a 2.25 inch telescopic adjustment, and an 18.00 inch, four (4) spoke steering wheel located at the driver's position. The steering wheel shall be covered with black polyurethane foam padding.

The steering column shall contain a horn button, self-canceling turn signal switch, four-way hazard switch and headlamp dimmer switch.

POWER STEERING PUMP

The hydraulic power steering pump shall be a TRW PS and shall be gear driven from the engine. The pump shall be a balanced, positive displacement, sliding vane type.

ELECTRONIC POWER STEERING FLUID LEVEL INDICATOR

The power steering fluid shall be monitored electronically and shall send a signal to activate an audible alarm and visual warning in the instrument panel when fluid level falls below normal.

FRONT AXLE CRAMP ANGLE

The chassis shall have a front axle cramp angle of 50-degrees to the left and right.

POWER STEERING GEAR

The power steering gear shall be a TRW model TAS 85.

CHASSIS ALIGNMENT

The chassis frame rails shall be measured to insure the length is correct and cross checked to make sure they run parallel and are square to each other. The front and rear axles shall be laser aligned. The front tires and wheels shall be aligned and toe-in set on the front tires by the chassis manufacturer.

REAR AXLE

The rear axle shall be a Meritor model RS-24-160 single drive axle. The axle shall include precision forged, single reduction differential gearing, and shall have a rated capacity of 24,000 pounds.

The axle shall be built of superior construction and quality components to provide the rugged dependability needed to stand up to the fire industry's demands. The axle shall include rectangular shaped, hot-formed housing with a standard wall thickness of 0.50 of an inch for extra strength and rigidity and a rigid differential case for high axle strength and reduced maintenance.

The axle shall have heavy-duty Hypoid gearing for longer life, greater strength and quieter operation. Industry-standard wheel ends for compatibility with both disc and drum brakes, and unitized oil seal technology to keep lubricant in and help prevent contaminant damage will be used.

REAR AXLE WARRANTY

The rear axle shall be warranted by Meritor for two (2) years with unlimited miles under the general service application. Details of the Meritor warranty are provided on the PDF document attached to this option.

REAR AXLE DIFFERENTIAL LUBRICATION

The rear axle differential shall be lubricated with oil.

REAR WHEEL BEARING LUBRICATION

The rear axle wheel bearings shall be lubricated with oil.

VEHICLE TOP SPEED

The top speed of the vehicle shall be approximately 68 MPH +/-2 MPH at governed engine RPM.

REAR SUSPENSION

The single rear axle shall feature a Reyco 79KB vari-rate, self-leveling captive slipper type conventional multi-leaf spring suspension, with 57.50 inch X 3.00 inch springs. One (1) adjustable and one (1) fixed torque rod shall be provided.

The rear suspension capacity shall be rated from 21,000 to 31,500 pounds.

FRONT TIRE

The front tires shall be Michelin 315/80R-22.5 20PR "L" tubeless radial XZA1 highway tread.

The front tire stamped load capacity shall be 18,180 pounds per axle with a speed rating of 75 miles per hour when properly inflated to 130 pounds per square inch.

The Michelin Tire Intermittent Service Rating load capacity shall be 20,000 pounds per axle with a speed rating of 75 miles per hour when properly inflated to 130 pounds per square inch. The Michelin

Intermittent Service Rating limits the operation of the emergency vehicle to one (1) hour of loaded travel with a one (1) hour cool down prior to another loaded run.

REAR TIRE

The rear tires shall be Michelin 11R-22.5 16PR "H" tubeless radial XDN2 all-weather tread designed for exceptional traction and mileage.

The rear tire stamped load capacity shall be 24,020 pounds per axle with a speed rating of 75 miles per hour when properly inflated to 120 pounds per square inch.

The Michelin Tire Intermittent Service Rating load capacity shall be 24,820 pounds per axle with a speed rating of 75 miles per hour when properly inflated to 120 pounds per square inch. The Michelin Intermittent Service Rating limits the operation of the emergency vehicle to one (1) hour of loaded travel with a one (1) hour cool down prior to another loaded run.

REAR AXLE RATIO

The rear axle ratio shall be 5.13:1.

TIRE PRESSURE INDICATOR

There shall be a voucher provided with the chassis for a dial style tire pressure indicator at the front tire valve stem and a pop up style tire pressure indicator at the rear tire valve stem. The indicator shall provide visual indication of pressure in the specific tire.

The tire pressure indicators shall be redeemed upon the vehicle manufacturer's receipt of the voucher for installation by the customer.

FRONT WHEEL

The front wheels shall be Accuride hub piloted, 22.50 inch X 9.00 inch polished aluminum wheels. The hub piloted mounting system shall provide easy installation and shall include two-piece flange nuts. The wheels shall be forged from a single piece of aluminum, designed to be corrosion resistant and are engineered for a long life.

REAR WHEEL

The rear wheels shall be Accuride hub piloted, heavy duty 22.50 inch X 8.25 inch aluminum wheels. Each outer wheel shall have a polished aluminum finish on the exterior surface and each inner wheel shall have a machine finish. The wheels shall be forged from a single piece of aluminum which shall be corrosion resistant, engineered to be lightweight and provide exceptional performance. The hub piloted mounting system shall provide easy installation and shall include two-piece flange nuts.

WHEEL TRIM

The front wheels shall include stainless steel lug nut covers and stainless steel baby moons. The baby moons shall have cutouts for oil seal viewing when applicable.

The rear wheels shall include stainless steel lug nut covers and band mounted spring clip stainless steel high hats.

The lug nut covers, baby moons, and high hats shall be RealWheels® brand constructed of 304L grade, non-corrosive stainless steel with a mirror finish. Each wheel trim component shall meet D.O.T. certification.

TIRE CHAINS

Onspot brand six (6) strand automatic ice chains shall be installed on the rear axle of the chassis to provide instant traction while traveling on ice and snow at speeds below 35 MPH.

TIRE CHAINS ACTIVATION

The tire chain system shall be activated by a locking switch on the dash to deter accidental activation. The light on the switch shall illuminate when the tire chains are engaged. The tire chains shall be interlocked with the transmission and shall engage only if the vehicle is traveling 30 MPH or less. After traveling over 30 MPH, the vehicle must be reduced to a speed below 5 MPH for the tire chains to be engaged or re-engaged.

BRAKE SYSTEM

A rapid build-up air brake system shall be provided. The air brakes shall include a two (2) air tank, three (3) reservoir system with a total of 4152 cubic inch of air capacity. A floor mounted treadle valve shall be mounted inside the cab for graduated control of applying and releasing the brakes. An inversion valve shall be installed to provide a service brake application in the unlikely event of primary air supply loss. All air reservoirs provided on the chassis shall be labeled for identification.

The rear axle spring brakes shall automatically apply in any situation when the air pressure falls below 25 PSI and shall include a mechanical means for releasing the spring brakes when necessary. An audible alarm shall designate when the system air pressure is below 60 PSI.

A four (4) sensor, four (4) modulator anti-lock braking system (ABS) shall be installed on the front and rear axles in order to prevent the brakes from locking or skidding while braking during hard stops or on icy or wet surfaces. This in turn shall allow the driver to maintain steering control under heavy braking and in most instances, shorten the braking distance. The electronic monitoring system shall incorporate diagonal circuitry which shall monitor wheel speed during braking through a sensor and tone ring on each wheel. A dash mounted ABS lamp shall be provided to notify the driver of a system malfunction. The ABS system shall automatically disengage the auxiliary braking system device when required. The speedometer screen shall be capable of reporting all active defaults using PID/SID and FMI standards.

Additional safety shall be accommodated through Automatic Traction Control (ATC) which shall be installed on the single rear axle. The ATC system shall apply the ABS when the drive wheels loose traction. The system shall scale the electronic engine throttle back to prevent wheel spin while accelerating on ice or wet surfaces.

A momentary rocker style switch shall be provided and properly labeled "mud/snow". When the switch is pressed once, the system shall allow a momentary wheel slip to obtain traction under extreme mud and snow conditions. During this condition the ATC light and the light on the rocker switch shall blink continuously notifying the driver of activation. Pressing the switch again shall deactivate the mud/snow feature.

The Electronic Stability Control (ESC) unit is a functional extension of the electronic braking system. It is able to detect any skidding of the vehicle about its vertical axis as well as any rollover tendency. The control unit comprises an angular-speed sensor that measures the vehicle's motion about the vertical axis, caused, for instance, by cornering or by skidding on a slippery road surface. An acceleration sensor measures the vehicle's lateral acceleration. The Controller Area Network (CAN) bus provides

information on the steering angle. On the basis of lateral acceleration and steering angle, an integrated microcontroller calculates a theoretical angular speed for the stable vehicle condition.

FRONT BRAKES

The front brakes shall be Meritor 16.50 inch x 6.00 inch S-cam drum type.

REAR BRAKES

The rear brakes shall be Meritor 16.50 inch X 7.00 inch S-cam drum type.

PARK BRAKE

Upon application of the push-pull valve in the cab, the rear brakes will engage via mechanical spring force. This is accomplished by dual chamber rear brakes, satisfying the FMVSS parking brake requirements.

PARK BRAKE CONTROL

A Meritor-Wabco manual hand control push-pull style valve shall operate the parking brake system. The control shall be yellow in color.

The parking brake actuation valve shall be mounted on the center of the tunnel within easy access of both the driver and officer positions.

FRONT BRAKE SLACK ADJUSTERS

The front brakes shall include Meritor automatic slack adjusters installed on the chassis which features a simple, durable design offering reduced weight. The automatic slack adjusters shall feature a manual adjusting nut which cannot inadvertently be backed off and threaded grease fittings for easy serviceability.

REAR BRAKE SLACK ADJUSTERS

The rear brakes shall include Meritor automatic slack adjusters installed on the axle which features a simple, durable design offering reduced weight. The automatic slack adjusters shall feature a manual adjusting nut which cannot inadvertently be backed off and threaded grease fittings for easy serviceability.

FRONT BRAKE DUST SHIELDS

The front axle shall be equipped with brake dust shields.

REAR BRAKE DUST SHIELDS

The rear brakes shall be equipped with brake dust shields.

AIR DRYER

The brake system shall include a Wabco System Saver 1200 air dryer with an integral heater with a Metri-Pack sealed connector. The air dryer incorporates an internal turbo cutoff valve that closes the path between the air compressor and air dryer purge valve during the compressor "unload" cycle. The turbo cutoff valve allows purging of moisture and contaminants without the loss of turbo boost pressure. The air dryer shall be mounted behind the battery box on the left hand side.

FRONT BRAKE CHAMBERS

The front brakes shall be provided with MGM type 30 brake chambers.

REAR BRAKE CHAMBERS

The rear axle shall include TSE 30/30 brake chambers which shall convert the energy of compressed air into mechanical force and motion. This shall actuate the brake camshaft, which in turn shall operate the foundational brake mechanism forcing the brake shoes against the brake drum. The TSE Type 30 brake chamber shall offer a 30.00 square inch effective area.

AIR COMPRESSOR

The air compressor provided for the engine shall be a Wabco® SS318 single cylinder pass-through drive type compressor which shall be capable of producing 18.7 CFM at 1200 engine RPMs. The air compressor shall feature a higher delivery efficiency translating to more air delivery per horsepower absorbed. The compressor shall include an aluminum cylinder head which shall improve cooling, reduce weight and decrease carbon formation. Superior piston and bore finishing technology shall reduce oil consumption and significantly increasing the system component life.

AIR GOVERNOR

An air governor shall be provided to control the cut-in and cut-out pressures of the engine mounted air compressor. The governor shall be calibrated to meet FMVSS requirements. The air governor shall be located on the air dryer bracket on the left frame rail behind the battery box.

AUXILIARY AIR RESERVOIR

One (1) auxiliary air reservoir with a 1200 cubic inch capacity shall be installed on the chassis to act as an additional reserve supply to the air system for air horn, air tool, or other non-service brake use. The reservoir shall be isolated with a 90 PSI pressure protection valve on the reservoir supply side to prevent depletion of the air to the air brake system.

MOISTURE EJECTORS

Manual pet-cock type drain valves shall be installed on all reservoirs of the air supply system.

AIR SUPPLY LINES

The air system on the chassis shall be plumbed with color coded reinforced nylon tubing air lines. The primary (rear) brake line shall be green, the secondary (front) brake line red, the parking brake line orange and the auxiliary (outlet) will be blue.

Brass compression type fittings shall be used on the nylon tubing. All drop hoses shall include fiber reinforced neoprene covered hoses.

REAR AIR TANK MOUNTING

If a combination of wheel base, air tank quantity, or other requirements necessitate the location of one or more air tanks to be mounted rear of the fuel tank, these tank(s) will be mounted parallel to frame.

WHEELBASE

The chassis wheelbase shall be 190.00 inches.

REAR OVERHANG

The chassis rear overhang shall be 43.00 inches.

FRAME

The frame shall consist of double rails running parallel to each other with cross members forming a ladder style frame. The frame rails shall be formed in the shape of a "C" channel, with the outer rail

measuring 10.25 inches high X 3.50 inches deep upper and lower flanges X 0.38 inches thick with an inner channel of 9.44 inches high X 3.13 inches deep and 0.38 inches thick. Each rail shall be constructed of 110,000 psi minimum yield high strength low alloy steel. Each double rail section shall be rated by a Resistance Bending Moment (RBM) minimum of 3,213,100 inch pounds and have a minimum section modulus of 29.21 cubic inches. The frame shall measure 35.00 inches in width.

Proposals calculating the frame strength using the "box method" shall not be considered.

Proposals including heat treated rails shall not be considered. Heat treating frame rails produces rails that are not uniform in their mechanical properties throughout the length of the rail. Rails made of high strength, low alloy steel are already at the required yield strength prior to forming the rail.

A minimum of seven (7) fully gusseted 0.25 inch thick cross members shall be installed. The inclusion of the body mounting, or bumper mounting shall not be considered as a cross member. The cross members shall be attached using zinc coated grade 8 fasteners. The bolt heads shall be flanged type, held in place by distorted thread flanged lock nuts. Each cross member shall be mounted to the frame rails utilizing a minimum of 0.25 inch thick gusset reinforcement plates at all corners balancing the area of force throughout the entire frame.

Any proposals not including additional reinforcement for each cross member shall not be considered.

All relief areas shall be cut in with a minimum 2.00 inch radius at intersection points with the edges ground to a smooth finish to prevent a stress concentration point.

The frame and cross members shall carry a lifetime warranty to the original purchaser. A copy of the frame warranty shall be made available upon request.

Proposals offering warranties for frames not including cross members shall not be considered.

FRAME WARRANTY

The frame and cross members shall carry a limited lifetime warranty to the original purchaser. The warranty shall include conditional items listed in the detailed warranty document which shall be provided upon request.

REAR TOW DEVICE

Two (2) heavy duty painted tow eyes shall be installed extending rearward from the frame at the rear of the chassis. The tow eyes shall be fabricated from 0.75 inch thick #1020 ASTM-36 hot rolled steel. The inside diameter of the tow eye shall be 2.00 inches and shall have a chamfered edge. The tow eyes shall be bolted one (1) on each side to the outside of the chassis frame with grade 8 bolts. The tow eyes shall be painted to match the chassis frame.

FRAME PAINT

The frame shall be powder coated black prior to any attachment of components.

All powder coatings, primers and paint shall be compatible with all metals, pretreatments and primers used. The cross hatch adhesion test per ASTM D3359 shall not have a fail of more than ten (10) squares. The pencil hardness test per ASTM D3363 shall have a final post-curved pencil hardness of H-2H. The direct impact resistance test per ASTM D2794 shall have an impact resistance of 120.00 inches per pound at 2 mils.

Any proposals offering painted frame with variations from the above process shall not be accepted. The film thickness of vendor supplied parts shall also be sufficient to meet the performance standards as stated above.

The chassis under carriage consisting of frame, axles, driveline running gear, air tanks and other chassis mounted components shall be painted with gloss black paint. Paint shall be applied prior to airline and electrical wiring installation.

FRONT BUMPER

A one piece, two (2) rib wrap-around style, polished stainless steel front bumper shall be provided. The material shall be 10 gauge 304 stainless steel, 12.00 inches high and 99.00 inches wide.

FRONT BUMPER EXTENSION LENGTH

The front bumper shall be extended approximately 24.00 inches ahead of the cab.

FRONT BUMPER EXTENSION FRAME WIDTH

The front bumper extension frame shall feature an overall width of 48.25 inches.

FRONT BUMPER SUCTION PROVISION

The bumper apron shall include a 5.00 inch stainless steel pipe intended for use as a suction intake for the pump. The suction pipe shall be routed from the right hand front bumper area to the area rear of the front axle near the back of the cab.

The front of the suction pipe shall be designed to extend vertically 1.50 inches above the top surface of the bumper in the right hand outboard position.

The forward end of the suction pipe shall be finished with a 5.00 inch National Pipe Thread (NPT). The rear of the suction shall include a Victaulic groove for connecting to the pump plumbing. The suction pipe shall also include a 0.50 inch NPT port intended as a primer assist connection.

The apparatus manufacturer shall plumb the suction pipe to the pump and shall provide all valves as required.

FRONT BUMPER APRON

The 24.00 inch extended front bumper shall include an apron constructed of 0.19 inch thick embossed aluminum tread plate.

The apron shall be installed between the bumper and the front face of the cab affixed using stainless steel bolts attaching the apron to the top bumper flange.

AIR HORN

The chassis shall include two (2) Hadley brand E-Tone air horns which shall measure 24.00 inches long with a 6.00 inch round flare. The air horns shall be trumpet style with a chrome finish on the exterior and a painted finish deep inside the trumpet.

AIR HORN LOCATION

The air horns shall be recess mounted in the front bumper face on the left side of the bumper in the inboard and outboard positions relative to the left hand frame rail.

AIR HORN RESERVOIR

One (1) air reservoir, with a 1200 cubic inch capacity, shall be installed on the chassis to act as a supply tank for operating air horns. The reservoir shall be isolated with a 90 PSI pressure protection valve on the reservoir supply side to prevent depletion of the air to the air brake system.

ELECTRONIC SIREN SPEAKER

The bumper shall include two (2) Cast Products Inc. model SA4301, 100 watt speakers which shall be recess mounted within the bumper fascia. Each speaker shall be rotated 90 degrees to a vertical orientation that shall measure 7.36 inches tall X 6.20 inches wide X 3.06 inches deep. Each speaker shall include a flat mounting flange which shall be polished aluminum.

ELECTRONIC SIREN SPEAKER LOCATION

The two (2) electronic siren speakers shall be located on the front bumper face on the right side outboard of the frame rail.

FRONT BUMPER TOW HOOKS

Two (2) heavy duty tow hooks, painted to match the chassis frame, shall be installed below the front bumper, forward position and bolted directly to the outside of each chassis frame rail with grade 8 bolts.

CAB TILT SYSTEM

The entire cab shall be capable of tilting approximately 45-degrees to allow for easy maintenance of the engine and transmission. The cab tilt pump assembly shall be located on the right side of the chassis above the battery box.

The electric-over-hydraulic lift system shall include an ignition interlock and red cab lock down indicator lamp on the tilt control which shall illuminate when holding the "Down" button to indicate safe road operation.

It shall be necessary to activate the master battery switch and set the parking brake in order to tilt the cab. As a third precaution the ignition switch must be turned off to complete the cab tilt interlock safety circuit.

Two (2) spring-loaded hydraulic hold down hooks located outboard of the frame shall be installed to hold the cab securely to the frame. Once the hold-down hooks are set in place, it shall take the application of pressure from the hydraulic cab tilt lift pump to release the hooks.

Two (2) cab tilt cylinders shall be provided with velocity fuses in each cylinder port. The cab tilt pivots shall be 1.90 inch ball and be anchored to frame brackets with 1.25 inch diameter studs.

A steel safety channel assembly, painted safety yellow shall be installed on the right side cab lift cylinder to prevent accidental cab lowering. The safety channel assembly shall fall over the lift cylinder when the cab is in the fully tilted position. A cable release system shall also be provided to retract the safety channel assembly from the lift cylinder to allow the lowering of the cab.

CAB TILT CONTROL RECEPTACLE

The cab tilt control cable shall include a receptacle which shall be temporarily located on the right hand chassis rail rear of the cab to provide a place to plug in the cab tilt remote control pendant. The tilt pump shall include 8.00 feet of cable with a six (6) pin Deutsch receptacle with a cap.

The remote control pendant shall include 20.00 feet of cable with a mating Deutsch connector. The remote control pendant shall be shipped loose with the chassis.

CAB WINDSHIELD

The cab windshield shall have a surface area of 2825.00 square inches and be of a two (2) piece wraparound design for maximum visibility.

The glass utilized for the windshield shall include standard automotive tint. The left and right windshield shall be fully interchangeable thereby minimizing stocking and replacement costs.

Each windshield shall be installed using black self locking window rubber.

GLASS FRONT DOOR

The front cab doors shall include a window which is 27.00 inches in width X 26.00 inches in height. These windows shall have the capability to roll down completely into the door housing. This shall be accomplished manually utilizing a crank style handle on the inside of the door. A reinforced window regulator assembly shall be provided for severe duty use.

There shall be an irregular shaped fixed window which shall measure 2.50 inches wide at the top, 8.00 inches wide at the bottom X 26.00 inches in height, more commonly known as "cozy glass" ahead of the front door roll down windows.

The windows shall be mounted within the frame of the front doors trimmed with a black anodized ring on the exterior.

GLASS TINT FRONT DOOR

The windows located in the left and right front doors shall have a standard green automotive tint which shall allow seventy-five percent (75%) light transmittance.

GLASS REAR DOOR RH

The rear right hand side door shall include a window which is 27.00 inches in width X 26.00 inches in height. This window shall roll up and down manually utilizing a crank style handle on the inside of the door. A reinforced window regulator assembly shall be provided for severe duty use.

GLASS TINT REAR DOOR RIGHT HAND

The window located in the right hand side rear door shall include a standard green automotive tint which shall allow seventy-five percent (75%) light transmittance.

GLASS REAR DOOR LH

The rear left hand side door shall include a window which is 27.00 inches in width X 26.00 inches in height. This window shall roll up and down manually utilizing a crank style handle on the inside of the door. A reinforced window regulator assembly shall be provided for severe duty use.

GLASS TINT REAR DOOR LEFT HAND

The window located in the left hand side rear door shall include a standard green automotive tint which shall allow seventy-five percent (75%) light transmittance.

GLASS SIDE MID RH

The cab shall include a window on the right side behind the front and ahead of the crew door which shall measure 16.00 inches wide X 26.00 inches high. This window shall be fixed within this space and shall be rectangular in shape. The window shall be mounted using self locking window rubber. The glass utilized for this window shall include a green automotive tint unless otherwise noted.

GLASS TINT SIDE MID RIGHT HAND

The window located on the right hand side of the cab between the front and rear doors shall include a standard green automotive tint which shall allow seventy-five percent (75%) light transmittance.

GLASS SIDE MID LH

The cab shall include a window on the left side behind the front door and ahead of the crew door and above the wheel well which shall measure 16.00 inches wide X 26.00 inches high. This window shall be fixed within this space and shall be rectangular in shape. The window shall be mounted using self locking window rubber. The glass utilized for this window shall include a green automotive tint unless otherwise noted.

GLASS TINT SIDE MID LEFT HAND

The window located on the left hand side of the cab between the front and rear doors shall include a standard green automotive tint which shall allow seventy-five percent (75%) light transmittance.

CLIMATE CONTROL

The cab shall be equipped with a Bus-Air brand ceiling mounted combination defrost / heating and air-conditioning system mounted above the engine tunnel in a central location.

The system shall offer sixteen (16) adjustable louvers. Six (6) of the louvers shall face forward towards the windshield, offering 45,000 BTU of heat at 320 CFM for defrosting. The system shall include six (6) rearward facing louvers to direct air for the crew area and four (4) for driver and officer comfort. The HVAC system shall be designed to produce 60,000 BTU of heat and 32,000 BTU of cooling. The HVAC cover shall be made of aluminum which shall be coated with a customer specified interior paint, or protective coating.

All defrost/heating systems shall be plumbed with one (1) seasonal shut-off valve at the front corner on the right side of the cab.

The air conditioner lines shall be a mixture of custom bent zinc coated steel fittings and Aero-quip GH 134 flexible hose with Aero-Quip EZ-Clip fittings.

CLIMATE CONTROL DRAIN

The climate control system shall include a gravity drain for water management. The gravity drain shall remove condensation from the air conditioning system without additional mechanical assistance.

CLIMATE CONTROL ACTIVATION

The heating, defrosting and air conditioning controls shall be on the dash next to driver panel, in a position which is easily accessible to the driver. The climate control shall be activated by a rotary switch.

HVAC OVERHEAD COVER PAINT

The overhead HVAC cover shall be painted with a Zolatone #20-72 silver gray texture finish.

AUXILIARY CLIMATE CONTROL FRONT UNDERSEAT

Two (2) 13,500 BTU heaters shall be provided and installed in the face of the seat riser storage area for the left and right front seats, one (1) each side. The heater fan controls shall be individual switches located in the rocker switch area of the dash.

The auxiliary heater system hoses shall be silicone with stainless steel constant torque clamps approved for use with silicone hose. All defrost/heating systems shall be plumbed with one (1) seasonal shut-off valve at the front corner on the right side of the cab. The cab must be tilted to access the shut-off valve.

A/C CONDENSER LOCATION

A roof mounted A/C condenser shall be installed centered on the cab forward of the raised roof against the slope rise.

A/C COMPRESSOR

The air-conditioning compressor shall be a belt driven, engine mounted, open type compressor that shall be capable of producing a minimum of 32,000 BTU at 1500 engine RPMs. The compressor shall utilize R-134A refrigerant and PAG oil.

CAB CIRCULATION FANS FRONT

The cab shall include two (2) all metal 6.00 inch air circulation fans installed overhead in the center of the cab rearward of the windshield. Each fan shall be controlled by an individual toggle switch on each fan. The fans can be used to help defog the windshield or to increase air circulation for passenger comfort.

UNDER CAB INSULATION

The underside of the cab tunnel surrounding the engine shall be lined with multi-layer insulation, engineered for application inside diesel engine compartments.

The insulation shall act as a noise barrier, absorbing noise thus keeping the decibel level in the cab well within NFPA recommendations. As an additional benefit, the insulation shall assist in sustaining the desired temperature within the cab interior.

The engine tunnel insulation shall measure approximately 0.75 inch thick including a vertically lapped polyester fiber layer, a 1.0 lb/ft² PVC barrier layer, an open cell foam layer, and a moisture and heat reflective foil facing reinforced with a woven fiberglass layer. The foil surface acts as protection against moisture and other contaminants. The insulation shall meet or exceed FMVSS 302 flammability test.

The insulation shall be cut precisely to fit each section and sealed for additional heat and sound deflection. The insulation shall be held in place by 3 mils of acrylic pressure sensitive adhesive and aluminum pins with hard hat, hold in place fastening heads.

INTERIOR TRIM FLOOR

The floor of the cab shall be covered with a multi-layer mat consisting of 0.25 inch thick sound absorbing closed cell foam with a 0.06 inch thick non-slip vinyl surface with a pebble grain finish. The covering shall be held in place by a pressure sensitive adhesive and aluminum trim molding. All exposed seams shall be sealed with silicone caulk matching the color of the floor mat to reduce the chance of moisture and debris retention.

INTERIOR TRIM VINYL

The cab interior shall include trim on the front ceiling, rear crew ceiling, and the cab walls. It shall be easily removable to assist in maintenance. The trim shall be constructed of insulated vinyl over a hard board backing.

REAR WALL INTERIOR TRIM

The rear wall of the cab shall be trimmed with vinyl.

HEADER TRIM

The cab interior shall feature header trim over the driver and officer dash constructed of 5052-H32 Marine Grade, 0.13 inch thick aluminum.

TRIM CENTER DASH

The main center dash area shall be constructed of durable vacuum formed ABS composite.

TRIM LH DASH

The left hand dash shall be a one (1) piece durable vacuum formed ABS composite housing which shall be custom molded for a perfect fit around the instrument panel. The left hand dash shall offer lower vertical surface area to the left and right of the steering column to accommodate control panels.

TRIM RH DASH

The right hand dash trim shall consist of a vacuum formed ABS composite module, which contains a glove compartment with a hinged locking door and a Mobile Data Terminal (MDT) provision. The glove compartment size shall be 13.50 inches wide X 6.25 inches high X 5.50 inches deep. The MDT provision shall be provided above the glove compartment.

ENGINE TUNNEL TRIM

The cab engine tunnel shall be covered with a multi-layer mat consisting of 0.25 inch closed cell foam with a 0.06 inch thick non-slip vinyl surface with a pebble grain finish. The mat shall be held in place by pressure sensitive adhesive. The engine tunnel mat shall be trimmed with anodized aluminum stair nosing trim for an aesthetically pleasing appearance.

POWER POINT DASH MOUNT

The cab shall include two (2) 12 volt cigarette lighter type receptacles in the center cab dash to provide a power source for 12 volt electrical equipment. The receptacles shall be wired to be live with the battery master switch.

STEP TRIM

Each cab entry door shall include a three step entry. The first step closest to the ground shall be constructed of 14 gauge 304 stainless steel with indented perforations. The perforations shall allow water and other debris to flow through rather than becoming trapped within the stepping surface. The stainless steel material shall have a number 7 mirror finish. The lower step shall be mounted to a frame which is integral with the construction of the cab for rigidity and strength. The middle step shall be integral with the cab construction and shall be trimmed in 0.08 inch thick 3003-H22 embossed aluminum tread plate.

UNDER CAB ACCESS DOOR

The cab shall include an aluminum access door in the left crew step riser painted to match the cab interior paint with a push and turn latch. The under cab access door shall provide access to the diesel exhaust fluid fill.

INTERIOR DOOR TRIM

The interior trim on the doors of the cab shall consist of an aluminum panel constructed of Marine Grade 5052-H32 0.13 of an inch thick aluminum plate. The door panels shall include a painted finish.

DOOR TRIM CUSTOMER NAMEPLATE

The interior door trim on the front doors shall include a customer nameplate which states the vehicle was custom built for their Department.

CAB DOOR TRIM REFLECTIVE

The interior of each door shall include high visibility reflective tape. A white reflective tape shall be provided vertically along the rear outer edge of the door. The lowest portion of each door skin shall include a reflective tape chevron with red and white stripes and a Spartan logo. The chevron tape shall measure 6.00 inches in height.

INTERIOR GRAB HANDLE "A" PILLAR

There shall be two (2) rubber covered 11.00 inch grab handles installed inside the cab, one on each "A" post at the left and right door openings. The left handle shall be located 7.88 inches above the bottom of the door window opening and the right handle shall be located 2.88 inches above the bottom of the door window opening. The handles shall assist personnel in entering and exiting the cab.

INTERIOR GRAB HANDLE FRONT DOOR

Each front door shall include one (1) ergonomically contoured 9.00 inch cast aluminum handle mounted horizontally on the interior door panels. The handles shall feature a textured black powder coat finish to assist personnel entering and exiting the cab.

INTERIOR GRAB HANDLE REAR DOOR

A black powder coated cast aluminum assist handle shall be provided on the inside of each rear crew door. A 30.00 inch long handle shall extend horizontally the width of the window just above the window sill. The handle shall assist personnel in exiting and entering the cab.

INTERIOR TRIM VINYL COLOR

The cab interior vinyl trim surfaces shall be gray in color.

INTERIOR TRIM SUNVISOR

The header shall include two (2) sun visors, one each side forward of the driver and officer seating positions above the windshield. Each sun visor shall be constructed of Masonite and covered with padded vinyl trim.

INTERIOR ABS TRIM COLOR

The cab interior vacuum formed ABS composite trim surfaces shall be gray in color.

INTERIOR FLOOR MAT COLOR

The cab interior floor mat shall be gray in color.

CAB PAINT INTERIOR DOOR TRIM

The inner door panel surfaces shall be painted with Zolatone #20-72 silver gray texture finish.

HEADER TRIM INTERIOR PAINT

The metal surfaces in the header area shall be coated with Zolatone #20-72 silver gray texture finish.

DASH PANEL GROUP

The main center dash area shall include three (3) removable panels located one (1) to the right of the driver position, one (1) in the center of the dash and one (1) to the left of the officer position. The center panel shall be within comfortable reach of both the driver and officer.

SWITCHES CENTER PANEL

The center dash panel shall include twelve (12) rocker switch positions in a single row across the top of the panel.

A rocker switch with a blank legend installed directly above shall be provided for any position without a switch and legend designated by a specific option. The non-specified switches shall be two-position, black switches with a green indicator light. Each blank switch legend can be custom engraved by the body manufacturer. All switch legends shall have backlighting provided.

SWITCHES LEFT PANEL

The left dash panel shall include eight (8) switches. There shall be six (6) switches across the top of the panel and two (2) staggered on the left hand portion of the panel. Five (5) of the top row of switches shall be rocker type and the left one (1) shall be the headlight switch. The remaining switches shall consist of one (1) windshield wiper/washer control switch and one (1) instrument lamp dimmer switch.

A rocker switch with a blank legend installed directly above shall be provided for any position not designated by a specific option. The non-designated switches shall be two-position, black switches with a green indicator light. Each blank switch legend can be custom engraved by the body manufacturer. All switch legends shall have backlighting provided.

SWITCHES RIGHT PANEL

The right dash panel shall include no rocker switches or legends.

SEAT BELT WARNING

A Class One seat belt warning system, integrated with the Vehicle Data Recorder system, shall be installed for each seat within the cab. The system shall activate an indicator light in the instrument panel, a digital seat position indicator with a seat position legend in the switch panel, and an audible alarm.

The warning system shall activate when any seat is occupied with a minimum of 60 pounds, the corresponding seat belt remains unfastened, and the park brake is released. The warning system shall also activate when any seat is occupied, the corresponding seat belt was fastened in an incorrect sequence, and the park brake is released. Once activated, the visual indicators and audible alarm shall remain active until all occupied seats have the seat belts fastened.

SEAT MATERIAL

The seats shall include a covering of high strength, wear resistant fabric made of durable ballistic polyester. A PVC coating shall be bonded to the back side of the material to help protect the seats from UV rays and from being saturated or contaminated by fluids. Common trade names for this material are Imperial 1200 and Durawear 1800.

SEAT COLOR

All seats supplied with the chassis shall be gray in color. All seats shall include red seat belts.

SEAT BACK LOGO

The seat back shall include the "Spartan Chassis" logo. The logo shall be centered on the standard headrest of the seat back and on the left side of a split headrest.

SEAT DRIVER

The driver's seat shall be an H.O. Bostrom Sierra model seat with air suspension. The four-way seat shall feature 3.00 inch vertical travel air suspension and manual fore and aft adjustment with 5.00 inches of travel. The suspension control shall be located on the seat below the left front corner of the bottom cushion. The seat shall also feature integral springs to isolate shock.

The seat position shall include a three-point shoulder harness with lap belt and an automatic retractor attached to the cab. The buckle portion of the seat belt shall be mounted on a semi-rigid stalk extending from the seat base within easy reach of the occupant.

The minimum vertical dimension from the seat H-point to the ceiling for this belted seating position shall be 37.00 inches measured with the seat suspension height adjusted to the upper limit of its travel.

This model of seat shall have successfully completed the static load tests set forth by FMVSS 207, 209, and 210 in effect at the time of manufacture. This testing shall include a simultaneous forward load of 3000 pounds each on the lap and shoulder belts and twenty (20) times the weight through the center of gravity.

The materials used in construction of the seat shall also have successfully completed testing with regard to the flammability of materials used in the occupant compartments of motor vehicles as outlined in FMVSS 302, of which dictates the allowable burning rate of materials in the occupant compartments of motor vehicles.

SEAT BACK DRIVER

The driver's seat shall feature a two (2) way adjustable lumbar support and offer an infinite fully reclining adjustable titling seat back. The seat back shall also feature a contoured head rest.

SEAT MOUNTING DRIVER

The driver's seat shall be installed in an ergonomic position in relation to the cab dash.

OCCUPANT PROTECTION DRIVER

The driver's position shall be equipped with the Advanced Protection System™ (APS). The APS shall selectively deploy integrated systems to protect against injuries in qualifying frontal impact, side impact, and rollover events. The increase in survivable space and security of the APS shall also provide ejection mitigation protection.

The driver's seating area APS shall include:

- Advanced seat belt system - retractor pre-tensioner tightens the seat belt around the driver, securing the occupant in the seat and the load limiter plays out some of the seat belt webbing to reduce seat belt to chest and torso force upon impact as well as mitigate head and neck injuries.

- Large side curtain airbag - protects the driver's head, neck, and upper body from dangerous cab side surfaces and contact points with intrusive surfaces as a result of a collision as well as provides ejection mitigation protection to the driver in a qualifying event by covering the window and the upper portion of the door.
- Dual knee airbags (patent pending) with energy management mounting (patent pending) - protects the driver's lower body from dangerous surface contact injuries, acceleration injuries, and from intrusion as well as locks the lower body in place so the upper body shall be slowed by the load limiting seat belt.

Steering wheel airbag - protects the driver's head, neck, and upper torso from contact injuries, acceleration injuries, and contact points with intrusive surfaces as a result of a collision.

SEAT OFFICER

The officer's seat shall be an H.O. Bostrom Sierra model seat with air suspension. The four-way seat shall feature 3.00 inch vertical travel air suspension and manual fore and aft adjustment with 5.00 inches of travel. The suspension control shall be located on the seat below the left front corner of the bottom cushion. The seat shall also feature integral springs to isolate shock.

The seat position shall include a three-point shoulder harness with lap belt and an automatic retractor attached to the cab. The buckle portion of the seat belt shall be mounted on a semi-rigid stalk extending from the seat base within easy reach of the occupant.

The minimum vertical dimension from the seat H-point to the ceiling for this belted seating position shall be 37.00 inches measured with the seat suspension height adjusted to the upper limit of its travel.

This model of seat shall have successfully completed the static load tests set forth by FMVSS 207, 209, and 210 in effect at the time of manufacture. This testing shall include a simultaneous forward load of 3000 pounds each on the lap and shoulder belts and twenty (20) times the weight through the center of gravity.

The materials used in construction of the seat shall also have successfully completed testing with regard to the flammability of materials used in the occupant compartments of motor vehicles as outlined in FMVSS 302, of which dictates the allowable burning rate of materials in the occupant compartments of motor vehicles.

SEAT BACK OFFICER

The officer's seat shall feature a SecureAll™ SCBA locking system which shall be one bracket model and store most U.S. and International SCBA brands and sizes while in transit or for storage within the seat back. The bracket shall be easily adjustable for all SCBA brands and cylinder diameters. All adjustment points shall utilize similar hardware and adjustments shall be made with one tool.

The bracket shall be adjustable to compensate for different cylinder lengths without the use of tools. The adjustment shall be made by raising a lever and moving the top clamp vertically.

The bracket system shall be free of straps and clamps that may interfere with auxiliary equipment on SCBA units. The center guide fork shall keep the SCBA tank in place for a safe and comfortable fit in the seat back cavity. The SCBA unit simply needs to be pushed against the pivot arm to engage the

patented auto- locking system. Once the lock is engaged, the top clamp shall surround the top of the SCBA tank for a secure fit in all directions.

The SecureAll™ shall include a release handle which shall be integrated into the seat cushion for quick and easy release. This shall eliminate the need for straps or pull cords to interfere with other SCBA equipment.

The seat back shall include a removable padded cover which shall be provided over the SCBA cavity.

SEAT MOUNTING OFFICER

The officer's seat shall be installed in an ergonomic position in relation to the cab dash.

OCCUPANT PROTECTION OFFICER

The officer's position shall be equipped with the Advanced Protection System™ (APS). The APS shall selectively deploy integrated systems to protect against injuries in qualifying frontal impact, side impact, and rollover events. The increase in survivable space and security of the APS shall also provide ejection mitigation protection.

The officer's seating area APS shall include:

- Advanced seat belt system - retractor pre-tensioner tightens the seat belt around the officer, securing the occupant in the seat and the load limiter plays out some of the seat belt webbing to reduce seat belt to chest and torso force upon impact as well as mitigate head and neck injuries.
- Large side curtain airbag - protects the officer's head, neck, and upper body from dangerous cab side surfaces and contact points with intrusive surfaces as a result of a collision as well as provides ejection mitigation protection to the officer in a qualifying event by covering the window and the upper portion of the door.

Knee airbags - protects the officer's lower body from dangerous surface contact injuries, acceleration injuries, and from contact points with intrusive surfaces as a result of a collision as well as locks the lower body in place so the upper body shall be slowed by the load limiting seat belt.

SEAT REAR FACING OUTER LOCATION

The crew area shall include two (2) rear facing crew seats, which include one (1) located directly behind the left side front seat and one (1) located directly behind the right side front seat.

SEAT CREW REAR FACING OUTER

The crew area shall include a seat in the rear facing outboard position which shall be a H.O. Bostrom Firefighter series. The seat shall feature a tapered and padded seat, and cushion.

The seat shall feature an all belts to seat (ABTS) style of safety restraint. The ABTS feature shall include a three-point shoulder harness with the lap belt and automatic retractor as an integral part of the seat assembly. The buckle portion of the seat belt shall extend from the seat base towards the driver position within easy reach of the occupant.

The minimum vertical dimension from the seat H-point to the ceiling for each belted seating position shall be 35.00 inches.

This model of seat shall have successfully completed the static load tests by FMVSS 207/210. This testing shall include a simultaneous forward load of 3000 pounds each on the lap and shoulder belts and twenty (20) times the weight through the center of gravity. This model of seat installed in the cab model, as specified, shall have successfully completed the dynamic sled testing using FMVSS 208 as a guide with the following accommodations. In order to reflect the larger size outfitted firefighters, the test dummy used shall be a 95th percentile hybrid III male weighing 225 pounds rather than the 50th percentile male dummy weighing 165 pounds as referenced in FMVSS 208. The model of seats shall also have successfully completed the flammability of materials used in the occupant compartments of motor vehicles as outlined in FMVSS 302, of which decides the burning rate of materials in the occupant compartments of motor vehicles.

SEAT BACK REAR FACING OUTER

The rear facing outboard seat shall feature a Bostrom SecureAll™ self contained breathing apparatus (SCBA) locking system which shall store most U.S. and International SCBA brands and bottle sizes while in transit or for storage within the seat back. The bracket shall be easily adjustable for all SCBA brands and cylinder diameters. All adjustment points shall utilize similar hardware and adjustments shall be made with one tool.

The bracket shall be adjustable to compensate for different cylinder lengths without the use of tools. The adjustment shall be made by raising a lever and moving the top clamp vertically.

The bracket system shall be free of straps that may interfere with auxiliary equipment on SCBA units. The center guide fork shall keep the SCBA tank in place for a safe and comfortable fit in the seat back cavity. The SCBA unit simply needs to be pushed against the pivot arm to engage the patented auto-locking system. Once the lock is engaged, the top clamp shall surround the top of the SCBA tank for a secure fit in all directions.

The SecureAll™ shall include a release handle which shall be integrated into the center of the bottom seat cushion for easy access and to eliminate hooking the release handle with clothing or other equipment.

The seat back shall include a removable padded cover which shall be provided over the SCBA cavity.

SEAT MOUNTING REAR FACING OUTER

The rear facing outer seat shall be mounted facing the rear of the cab.

OCCUPANT PROTECTION RFO

The rear facing outer seat position(s) shall be equipped with the Advanced Protection System™ (APS). The APS shall selectively deploy integrated systems to protect against injuries in qualifying frontal impact, side impact, and rollover events. The increase in survivable space and security of the APS shall also provide ejection mitigation protection.

Each rear facing outer seating position APS shall include:

- APS advanced seat belt system - retractor pre-tensioners tighten the seat belts around each occupant, securing the occupants in seats and load limiters play out some of the seat belt webbing to reduce seat belt to chest and torso force upon impact as well as mitigate head and neck injuries.

Side curtain airbag - protects each occupant's head, neck, and upper body from dangerous cab side surfaces and contact points with intrusive surfaces as a result of a collision as well as provides ejection mitigation protection to each occupant in a qualifying event by covering the windows and walls adjacent to each seating position with an airbag custom designed for each cab configuration.

SEAT BELT ORIENTATION CREW

The crew position seat belts shall follow the standard orientation which extends from the outboard shoulder extending to the inboard hip.

SEAT FORWARD FACING CENTER LOCATION

The crew area shall include two (2) forward facing center crew seats with both located at the center of the rear wall.

SEAT CREW FORWARD FACING CENTER

The crew area shall include a seat in the forward facing center position which shall be a H.O. Bostrom Firefighter series. The seat shall feature a tapered and padded seat, and cushion. The seat and cushion shall be hinged and compact in design for additional room and shall remain in the stored position until occupied.

The seat shall feature an all belts to seat (ABTS) style of safety restraint. The ABTS feature shall include a three-point shoulder harness with the lap belt and automatic retractor as an integral part of the seat assembly. The buckle portion of the seat belt shall extend from the seat base towards the driver position within easy reach of the occupant.

The minimum vertical dimension from the seat H-point to the ceiling for each belted seating position shall be 35.00 inches.

This model of seat shall have successfully completed the static load tests by FMVSS 207/210. This testing shall include a simultaneous forward load of 3000 pounds each on the lap and shoulder belts and twenty (20) times the weight through the center of gravity. This model of seat installed in the cab model, as specified, shall have successfully completed the dynamic sled testing using FMVSS 208 as a guide with the following accommodations. In order to reflect the larger size outfitted firefighters, the test dummy used shall be a 95th percentile hybrid III male weighing 225 pounds rather than the 50th percentile male dummy weighing 165 pounds as referenced in FMVSS 208. The model of seats shall also have successfully completed the flammability of materials used in the occupant compartments of motor vehicles as outlined in FMVSS 302, of which decides the burning rate of materials in the occupant compartments of motor vehicles.

SEAT BACK FORWARD FACING CENTER

The forward facing center seat shall feature a SecureAll™ self contained breathing apparatus (SCBA) locking system which shall be one bracket model and store most U.S. and International SCBA brands and sizes while in transit or for storage within the seat back. The bracket shall be easily adjustable for all SCBA brands and cylinder diameters. All adjustment points shall utilize similar hardware and adjustments shall be made with one tool.

The bracket shall be adjustable to compensate for different cylinder lengths without the use of tools. The adjustment shall be made by raising a lever and moving the top clamp vertically.

The bracket system shall be free of straps and clamps that may interfere with auxiliary equipment on SCBA units. The center guide fork shall keep the SCBA tank in place for a safe and comfortable fit in the seat back cavity. The SCBA unit simply needs to be pushed against the pivot arm to engage the patented auto- locking system. Once the lock is engaged, the top clamp shall surround the top of the SCBA tank for a secure fit in all directions.

The SecureAll™ shall include a release handle which shall be integrated into the seat cushion for quick and easy release. This shall eliminate the need for straps or pull cords to interfere with other SCBA equipment.

The seat back shall include a removable padded cover which shall be provided over the SCBA cavity.

OCCUPANT PROTECTION FFC

The forward facing center seat position(s) shall be equipped with the Advanced Protection System™ (APS). The APS shall selectively deploy integrated systems to protect against injuries in qualifying frontal impact, side impact, and rollover events. The increase in survivable space and security of the APS shall also provide ejection mitigation protection.

Each forward facing center seating position APS shall include:

- APS advanced seatbelt system - retractor pre-tensioners tighten the seat belts around each occupant, securing the occupants in seats and load limiters play out some of the seat belt webbing to reduce seat belt to chest and torso force upon impact as well as mitigate head and neck injuries.

Side curtain airbag - provides ejection mitigation protection to each occupant in a qualifying event by covering the windows and walls adjacent to crew seating with an airbag custom designed for each cab configuration.

SEAT FRAME FORWARD FACING

The forward facing center seating positions shall include an enclosed seat frame located and installed on the rear wall. The seat frame shall measure 42.38 inches wide X 12.38 inches high X 22.00 inches deep. The seat frame shall be constructed of Marine Grade 5052-H32 0.19 inch thick aluminum plate. The seat box shall be painted with the same color as the remaining interior.

SEAT FRAME FORWARD FACING STORAGE ACCESS

There shall be two (2) access points to the seat frame storage area, one (1) on each side of the seat frame. Each access point shall be covered by a hinged door which measures 15.00 inches in width X 10.63 inches in height.

SEAT MOUNTING FORWARD FACING CENTER

The forward facing center seats shall be installed facing the front of the cab.

CAB FRONT UNDERSEAT STORAGE ACCESS

The left and right under seat storage areas shall have a vented aluminum hinged door with non-locking latch.

SEAT COMPARTMENT DOOR FINISH

All underseat storage compartment access doors shall have a Zolatone #20-72 silver gray texture.

WINDSHIELD WIPER SYSTEM

The cab shall include a dual arm wiper system which shall clear the windshield of water, ice and debris. There shall be two (2) windshield wipers which shall be affixed to a radial wet arm. The system shall include a single motor which shall initiate the arm in which both the left hand and right hand windshield wipers are attached, initiating a back and forth motion for each wiper. The wiper motor shall be activated by an intermittent wiper control located within easy reach of the driver's position.

ELECTRONIC WINDSHIELD FLUID LEVEL INDICATOR

The windshield washer fluid level shall be monitored electronically. When the washer fluid level becomes low the yellow "Check Message Center" indicator light on the instrument panel shall illuminate and the message center in the dual air pressure gauge shall display a "Check Washer Fluid Level" message.

CAB DOOR HARDWARE

The cab entry doors shall be equipped with exterior pull handles, suitable for use while wearing firefighter gloves. The handles shall be made of aluminum with a chrome plated finish.

The interior exit door handles shall be flush paddle type with a black finish, which are incorporated into the upper door panel.

All cab entry doors shall include locks which are keyed alike. The door locks shall be designed to prevent accidental lockout.

The exterior pull handles shall include a scuff plate behind the handle constructed of polished stainless steel to help protect the cab finish.

DOOR LOCKS

Each cab entry door shall include a manually operated door lock. The each door lock may be actuated from the inside of the cab by means of a red knob located on the paddle handle of the respective door or by using a TriMark key from the exterior. The door locks are designed to prevent accidental lock out.

GRAB HANDLES

The cab shall include one (1) 24.00 inch knurled, anti-slip, one-piece exterior assist handle behind each cab door. The grab handle shall be made of 14 gauge 304- stainless steel and be 1.25 inch diameter to enable non-slip assistance with a gloved hand.

REARVIEW MIRRORS

Ramco model CRM-310-1350-PCHR bus style mirrors shall be provided. The mirror heads shall be injection molded chrome plated ABS plastic and shall measure 9.75 inches wide X 13.50 inches high. The mirrors shall be mounted one (1) on each the driver and officer doors of the cab with polished die-cast aluminum arms.

The mirrors shall feature an upper heated remote controlled flat glass and a lower heated remote controlled convex glass. The mirror control switches shall be located within easy reach of the driver. The mirrors shall be manufactured using the finest quality non-glare glass and shall feature a rigid mounting thereby reducing vibration. The mirrors shall be corrosion free under all weather conditions.

REARVIEW MIRROR HEAT SWITCH

The heat for the rearview mirrors shall be controlled through a rocker switch in the mirror control panel on the left side dash.

TRIM LOWER SIDE

A stainless steel trim band, 10.00 inches high, with upper and lower black and chrome trim moldings, shall be installed on the lower exterior sides of the cab and doors. The trim shall be installed so that the top edge approximately 1.00 inch below the top of the front bumper, and shall be affixed without holes and fasteners.

TRIM LOWER SIDE FRONT

A stainless steel trim band, 10.00 inches high, with upper and lower black and chrome trim moldings, shall be installed on the lower exterior sides of the cab between the front bumper and the front doors. The trim shall be installed so that the top edge is approximately 1.00 inch below the top of the front bumper, and shall be affixed without holes and fasteners.

EXTERIOR TRIM REAR CORNER

There shall be mirror finish stainless steel scuff plates on the outside corners at the back of the cab. The stainless steel plate shall be affixed to the cab using two sided adhesive tape.

CAB FENDER

Full width wheel well liners shall be installed on the extruded cab to limit road splash and enable easier cleaning. Each two-piece liner shall consist of an inner liner 16.00 inches wide made of vacuum formed ABS composite and an outer fenderette 3.50 inches wide made of 12 gauge polished aluminum.

CAB EXTERIOR FRONT & SIDE EMBLEMS

The cab shall include three (3) Spartan Chassis emblems. There shall be one (1) installed on the front air intake grille and one (1) emblem with an integrated model nameplate installed on the exterior of the cab on the lower forward portion of the front driver and officer side doors.

CAB EXTERIOR MODEL NAMEPLATE

The cab shall include custom "Metro Star Advanced Protection System" nameplates integrated into the side emblem.

IGNITION

A master battery system with a keyless start ignition system shall be provided. Each system shall be controlled by a one-quarter turn Cole Hersee switch, both of which shall be mounted to the left of the steering wheel on the dash. A chrome push type starter button shall be provided adjacent to the master battery and ignition switches.

Each switch shall illuminate a green LED indicator light on the dash when the respective switch is placed in the "ON" position.

The starter button shall only operate when both the master battery and ignition switches are in the "ON" position.

BATTERY

The single start electrical system shall include six (6) Harris BCI 31 950 CCA batteries with a 210 minute reserve capacity and 4/0 welding type dual path starter cables per SAE J541. The cables shall have encapsulated ends with heat shrink and sealant.

BATTERY TRAY

The batteries shall be installed within two (2) steel battery trays located on the left side and right side of the chassis, securely bolted to the frame rails. The battery trays shall be coated with the same material as the frame.

The battery trays shall include drain holes in the bottom for sufficient drainage of water. A durable, non-conducting, interlocking mat made by Dri-Dek shall be installed in the bottom of the trays to allow for air flow and help prevent moisture build up. The batteries shall be held in place by non-conducting phenolic resin hold down boards.

BATTERY BOX COVER

Each battery box shall include a steel cover which protects the top of the batteries. Each cover shall include flush latches which shall keep the cover secure as well as a black powder coated handle for convenience when opening.

BATTERY CABLE

The starting system shall include cables which shall be protected by 275 degree F. minimum high temperature flame retardant loom, sealed and encapsulated at the ends with heat shrink and sealant.

BATTERY JUMPER STUD

The starting system shall include battery jumper studs. These studs shall be located in the forward most portion of the driver's side lower step. The studs shall allow the vehicle to be jump started, charged, or the cab to be raised in an emergency in the event of battery failure.

ALTERNATOR

The charging system shall include a 270 amp Leece Neville 12 volt alternator. The alternator shall include a self-excited integral regulator.

BATTERY CONDITIONER

A Kussmaul 1200 Pump Plus battery conditioner shall be supplied. The battery conditioner shall be mounted in the cab in the LH rear facing outer seating position.

BATTERY CONDITIONER DISPLAY

A Kussmaul battery conditioner display shall be supplied. The battery conditioner display shall be mounted in the cab, viewable through the cab mid side window behind the left front door.

AUXILIARY AIR COMPRESSOR

A Kussmaul Pump 12V HP air compressor shall be supplied. The air compressor shall be installed behind the driver's seat. The air compressor shall be plumbed to the air brake system to maintain air pressure.

ELECTRICAL INLET

A Kussmaul 20 amp super auto-eject electrical receptacle shall be supplied. It shall automatically eject the plug when the starter button is depressed.

A single item or an addition of multiple items must not exceed the rating of the electric inlet that it's connected to.

Amp Draw Reference List:

Kussmaul 1000 Charger - 3.5 Amps

Kussmaul 1200 Charger - 10 Amps

Kussmaul 35/10 Charger - 10 Amps

1000W Engine Heater - 8.33 Amps

1500W Engine Heater - 12.5 Amps

120V Air Compressor - 4.2 Amps

ELECTRICAL INLET LOCATION

An electrical inlet shall be installed on the left hand side of cab over the wheel well.

ELECTRICAL INLET CONNECTION

The electrical inlet shall be connected to the battery conditioner.

ELECTRICAL INLET COLOR

The electrical inlet connection shall include a red cover.

HEADLIGHTS

The cab front shall include four (4) rectangular halogen headlamps with separate high and low beams mounted in bright chrome bezels.

FRONT TURN SIGNALS

The front fascia shall include two (2) Whelen model 600 4.00 inch X 6.00 inch programmable amber LED turn signals which shall be installed in a polished aluminum housing above and outboard of the front warning and head lamps.

HEADLIGHT LOCATION

The headlights shall be located on the front fascia of the cab directly below the front warning lights.

SIDE TURN/MARKER LIGHTS

The sides of the cab shall include two (2) LED round side marker lights which shall be provided just behind the front cab radius corners.

MARKER AND ICC LIGHTS

In accordance with FMVSS, there shall be five (5) LED cab marker lamps designating identification, center and clearance provided. These lights shall be installed on the face of the cab within full view of other vehicles from ground level.

HEADLIGHT AND MARKER LIGHT ACTIVATION

The headlights and marker lights shall be controlled through a rocker switch within easy reach of the driver. There shall be a dimmer switch within easy reach of the driver to adjust the brightness of the dash lights. The headlamps shall be equipped with the "Daytime Running" light feature, which shall illuminate the headlights to 80% brilliance when the battery master switch is in the "On" position and the parking brake is released.

GROUND LIGHTS

Each door shall include an LED NFPA compliant ground light mounted to the under side of the cab step below each door. The lights shall include a polycarbonate lens, a housing which is vibration welded and

LEDs which shall be shock mounted for extended life. The ground lighting shall be activated by the respective door as well as rocker switched.

STEP LIGHTS

The middle step located at each door shall include a recess mounted 4.00 inch round LED light which shall activate with the opening of the respective door.

ENGINE COMPARTMENT LIGHT

There shall be an incandescent NFPA compliant light mounted under the engine tunnel for area work lighting on the engine. The light shall include a polycarbonate lens, a housing which is vibration welded and a bulb which shall be shock mounted for extended life. The light shall activate automatically when the cab is tilted.

SIDE SCENE LIGHTS

The cab shall include two (2) Fire Research model LED900-Q65 surface mount lights, one (1) each side. Each light shall be 6.75 inches high X 9.00 inches wide and have a profile of less than 1.75 inches beyond the mounting surface. Wiring shall extend from a weatherproof strain relief at the rear of the light.

Each lamp head shall have twenty-four (24) white LEDs that generate a rated 4400 lumens at 12 or 24 volts DC. The lens shall redirect the light along the vehicle and out onto the working area. The light housing shall be aluminum with a chrome colored bezel.

SIDE SCENE LIGHT LOCATION

The scene lighting located on the left and right sides of the cab shall be mounted rearward of the cab "B" pillar in the 10.00 inch raised roof portion of the cab between the front and rear crew doors.

SIDE SCENE ACTIVATION

The scene lights shall be activated by two (2) rocker switches located in the switch panel, one (1) for each light.

INTERIOR OVERHEAD LIGHTS

The cab shall include a two-section, red and clear Weldon incandescent dome lamp located over each door. The dome lamps shall be rectangular in shape and shall measure approximately 9.50 inches in length X 5.00 inches in width with a black colored bezel. The clear portion of each lamp shall be activated by opening the respective door and both the red and clear portions can be activated by individual switches on each lamp.

An additional two-section Weldon incandescent red and clear lamp shall be provided over the engine tunnel which can be activated by individual switches on the lamp.

DO NOT MOVE APPARATUS LIGHT

The front headliner of the cab shall include a flashing red light clearly labeled "Do Not Move Apparatus". In addition to the flashing red light, an audible alarm shall be included which shall sound while the light is activated.

The flashing red light shall be 6.00 inches long X 2.50 inches wide X 1.75 inches high and shall be located centered left to right for greatest visibility.

The light and alarm shall be interlocked for activation when either a cab door is not firmly closed or an apparatus compartment door is not closed, and the parking brake is released.

MASTER WARNING SWITCH

A master switch shall be included in the main rocker switch panel. The switch shall be a rocker type, red in color and labeled "Master" for identification. The switch shall feature control over all devices wired through it. Any warning device switch left in the "ON" position shall automatically power up when the master switch is activated.

INBOARD FRONT WARNING LIGHTS

The cab front fascia shall include two (2) Whelen 600 series Super LED front warning lights in the left and right inboard positions. The lights shall feature multiple flash patterns including steady burn for solid colors and multiple flash patterns for split colors. The lights shall be mounted to the front fascia of the cab within a chrome bezel.

INBOARD FRONT WARNING LIGHTS COLOR

The warning lights mounted on the cab front fascia in the inboard positions shall be clear.

OUTBOARD FRONT WARNING LIGHTS

The cab front fascia shall include two (2) Whelen 600 series Super LED front warning lights in the left and right outboard positions. The lights shall feature multiple flash patterns including steady burn for solid colors and multiple flash patterns for split colors. The lights shall be mounted to the front fascia of the cab within a chrome bezel.

OUTBOARD FRONT WARNING LIGHTS COLOR

The warning lights mounted on the cab front fascia in the outboard position shall be red with a clear lens.

FRONT WARNING SWITCH

The front warning lights shall be controlled through the lower level warning switch.

INTERSECTION WARNING LIGHTS

The chassis shall include two (2) Whelen 600 series Super LED intersection warning lights, one (1) each side. The lights shall feature multiple flash patterns including steady burn for solid colors and multiple flash patterns for split colors.

INTERSECTION WARNING LIGHTS COLOR

The intersection lights shall be red with a clear lens.

INTERSECTION WARNING LIGHTS LOCATION

The intersection lights shall be mounted on the side of the bumper.

SIDE WARNING LIGHTS

The cab sides shall include two (2) Whelen 600 series Super LED warning lights, one (1) on each side. The lights shall feature multiple flash patterns including steady burn for solid colors and multiple flash patterns for split colors. The lights shall be mounted to the sides of the cab within a chrome bezel.

SIDE WARNING LIGHTS COLOR

The warning lights located on the side of the cab shall be red with clear lens.

SIDE WARNING LIGHTS LOCATION

The warning lights on the side of the cab shall be mounted over the front wheel well directly over the center of the front axle.

SIDE AND INTERSECTION WARNING SWITCH

The side warning lights shall be controlled through the lower level warning switch.

LIGHTBAR PROVISION

There shall be one (1) light bar installed on the cab roof. The light bar shall be provided and installed by Spartan Chassis. The light bar installation shall include mounting and wiring to a control switch on the cab dash.

CAB FRONT LIGHTBAR

The lightbar provisions shall be for one (1) Whelen brand Freedom FN72QLED lightbar mounted centered on the front of the cab roof. The lightbar shall be 72.00 inches in length. The lightbar shall feature six (6) red LED lights and two (2) clear LED lights. The clear lights shall be disabled with park brake engaged. The cable shall exit the lightbar on the right side of the cab.

LIGHTBAR SWITCH

The light bar shall be controlled by a rocker switch located in the switch panel. This switch shall be labeled "Upper Level Warning".

INTERIOR DOOR OPEN WARNING LIGHTS

The interior of each door shall include one (1) 15.87 inch long X 0.73 inch tall amber Weldon LED warning light. The light shall be located on the upper portion of the door frame to be visible when a person is standing in front of the door while entering or exiting the cab. Each light shall activate with a scrolling directional flash pattern which moves from inside to outside when the door is in the open position. This shall serve as a warning to oncoming traffic.

SIREN CONTROL HEAD

A Whelen 295HFS2 electronic siren control head with remote amplifier shall be provided and flush mounted in the switch panel with a location specific to the customer's needs. The siren shall feature 200-watt output, hands free mode and shall be in "standby" mode awaiting instruction. The siren shall offer radio broadcast, public address, wail, yelp, or piercer tones and hands free operation which shall allow the operator to turn the siren on and off from the horn ring if a horn/siren selector switch option is also selected.

HORN BUTTON SELECTOR SWITCH

A rocker switch shall be installed in the switch panel between the driver and officer to allow control of either the electric horn or the air horn from the steering wheel horn button. The electric horn shall sound by default when the selector switch is in either position to meet FMCSA requirements.

AIR HORN ACTIVATION

The air horn activation shall be accomplished by the steering wheel horn button for the driver and a right hand side Linemaster model SP491-S81 foot switch for the officer. An air horn activation circuit shall be provided to the chassis harness pump panel harness connector.

BACK-UP ALARM

An ECCO model 575 backup alarm shall be installed at the rear of the chassis with an output level of 107 dB. The alarm shall automatically activate when the transmission is placed in reverse.

INSTRUMENTATION

An ergonomically designed instrument panel shall be provided. Each gauge shall be backlit with LED lamps. Stepper motor movements shall drive all gauges. The instrumentation system shall be multiplexed and shall receive ABS, engine, and transmission information over the J1939 data bus to reduce redundant sensors and wiring.

The instrument panel shall contain the following gauges:

One (1) electronic speedometer shall be included. The primary scale on the speedometer shall read from 0 to 100 MPH, and the secondary scale on the speedometer shall read from 0 to 160 KM/H.

One (1) electronic tachometer shall be included. The scale on the tachometer shall read from 0 to 3000 RPM.

One (1) two-movement gauge displaying primary system, and secondary system air volumes and integral LCD odometer/trip odometer shall be included on the lower portion of the LCD. The scale on the air pressure gauges shall read from 0 to 150 pounds per square inch (PSI). The air pressure scales shall be linear to operate with an accuracy of 1 degree of the measured data with a red indication zone on the gauge showing critical levels of air pressure. A red indicator light in the gauge shall indicate a low air pressure, as well as a message on the LCD screen. The odometer shall display up to 9,999,999.9 miles. The trip odometer shall display 9,999.9 miles. The LCD shall display Transmission Temperature in degrees Fahrenheit on the upper portion of the LCD. The LCD screen shall also be capable of displaying certain diagnostic functions.

One (1) four-movement gauge displaying engine oil pressure, coolant temperature, fuel level, voltmeter, and an *indicator bar displaying Diesel Exhaust Fluid (DEF) LED bar shall be included. The scale on the engine oil pressure gauge shall read from 0 to 120 pounds per square inch (PSI). The engine oil pressure scale shall be linear to operate with an accuracy of 1 degree of the measured. A red indicator light in the gauge shall indicate a low engine oil pressure, as well as a message on the LCD screen. The scale on the coolant temperature gauge shall read from 100 to 250 degrees Fahrenheit (F). The coolant temperature scale shall be linear to operate with an accuracy of 1 degree of the measured data with a red indication zone on the gauge showing critical levels of air pressure. A red indicator light in the gauge shall indicate high coolant temperature, as well as a message on the LCD screen. The scale on the fuel level gauge shall read from empty to full as a percentage of fuel remaining. An amber indicator light shall indicate low fuel at 25% tank level. The scale on the voltmeter shall read from 10 to 16 volts with a red indication zone on the gauge showing critical levels of battery voltage. A red indicator light shall indicate high or low system voltage, as well as a message on the LCD screen. The scale on the DEF LED bar will consist of four (4) LEDs displaying levels in increments of 25% of useable DEF in green. Upon decreasing levels, the indicator bar will change colors to notify the driver of decreasing levels of DEF and action will be required. An amber indicator light shall indicate low levels of DEF, as well as a message on the LCD screen and an audible alarm.

The instrument panel shall include a light bar that contains the following LED indicator lights and produce the following audible alarms in applicable configurations:

RED LAMPS

Stop Engine-indicates critical engine fault
Air Filter Restricted-indicates excessive engine air intake restriction
Park Brake-indicates parking brake is set
Seat Belt Indicator-indicates when a seat is occupied and corresponding seat belt remains unfastened
Low Coolant-indicates engine coolant is required

AMBER LAMPS

MIL-indicates an engine emission control system fault
Check Engine-indicates engine fault
Check Trans-indicates transmission fault
High Transmission Temperature-indicates excessive transmission oil temperature
ABS-indicates anti-lock brake system fault
HEST-indicates a high exhaust system temperature
Water in Fuel-indicates presence of water in fuel filter
*DPF-indicates a restriction of the diesel particulate filter
*Regen Inhibit-indicates regeneration has been postponed due to user interaction
Range Inhibit-indicates a transmission operation is prevented and requested shift request may not occur.
*SRS-indicates a problem in the supplemental restraint system
Check Message-Turn Signal On
Check Message-Door Ajar
Check Message-Cab Ajar
Check Message-ESC Active
*Check Message-DPF Regen Active
Check Message-No Engine Data
Check Message-No Transmission Data
Check Message-No ABS Data
Check Message-No Data All Communication With The Vehicle Systems Has Been Lost
Check Message-Check Engine Oil Level
Check Message-Check Washer Fluid Level
Check Message-Check Power Steering Fluid Level
Check Message-Low Transmission Fluid Level
Check Message-Check Coolant Level

GREEN LAMPS

Left and Right turn signal indicators
ATC-indicates low wheel traction for automatic traction control equipped vehicles, also indicates mud/snow mode is active for ATC system
High Idle-indicates engine high idle is active.
Cruise Control-indicates cruise control is active
OK to Pump-indicates the pump engage conditions have been met
Pump Engaged-indicates the pump is currently in use
Auxiliary Brake-indicates secondary braking device is active

BLUE LAMP

High Beam Indicator

WHITE LAMP

Wait to Start-indicates active engine air preheat cycle

AUDIBLE ALARMS FROM GAUGE PACKAGE

High Trans Temp
High or Low Voltage
Check Engine
Check Transmission
Stop Engine
Low Air Pressure
Fuel Low
Water in Fuel
ESC
High Coolant Temperature
Low Engine Oil Pressure
Low Coolant Level
*Low DEF Level
Air Filter Restricted
Extended Left and Right Turn Remaining On
Cab Ajar
Door Ajar
ABS System Fault
Seatbelt Indicator

EXTERNAL AUDIBLE ALARM

Air Filter
Cab Ajar
Door Ajar
Check Engine
Stop Engine
Low Air Pressure
Water in Fuel
*Low DEF
ABS System Fault
Seatbelt Indicator

*Items marked with an asterisk are provided only in applicable configurations.

BACKLIGHTING COLOR

The instrumentation gauges and the switch panel legends shall be backlit using red LED backlighting.

RADIO

A Panasonic radio with weather band, AM/FM stereo receiver, compact disc player, and four (4) speakers shall be installed in the cab. The radio shall be installed above the driver position. The speakers shall be installed inside the cab with two (2) speakers recessed within the headliner of the front of the cab just behind the windshield and two (2) speakers on the upper rear wall of the cab.

AM/FM ANTENNA

A small antenna shall be located on the left hand side of the cab roof for AM/FM and weather band reception.

COMMUNICATION ANTENNA

An antenna base, for use with an NMO type antenna, shall be mounted on the right hand front corner of the cab roof so not to interfere with light bars or other roof mounted equipment installed by Spartan Chassis. The antenna base shall be an Antenex model MABVT8 made for either a 0.38 inch or 0.75 inch receiving hole in the antenna and shall include 17.00 foot of RG58 A/U cable with no connector at the radio end of the cable. The antenna base design provides the most corrosion resistance and best power transfer available from a high temper all brass construction and gold plated contact design. The antenna base shall be provided by Spartan.

COMMUNICATION ANTENNA CABLE ROUTING

The antenna cable shall be routed from the antenna base mounted on the roof to the area inside the center rocker switch console.

CAB EXTERIOR PROTECTION

The cab face shall have a removable plastic film installed over the painted surfaces to protect the paint finish during transport to the body manufacturer.

FIRE EXTINGUISHER

A 2.50 pound D.O.T approved fire extinguisher with BC rating shall be shipped loose with the cab.

DOOR KEYS

The cab and chassis shall include a total of four (4) door keys for the manual door locks.

DIAGNOSTIC SOFTWARE OCCUPANT PROTECTION

Diagnostic software for the Spartan Advanced Protection System shall be available for free download from the Spartan Chassis website to Spartan authorized OEMs, dealers and service centers, as well as the vehicle owner.

The software has been validated to be compatible with the following RP1210 interface adapters:

- Dearborn Group DPA4 Plus
- Noregon Systems JPRO® DLA+
- Cummins INLINE5
- Cummins INLINE6
- NexIQ™ USB-Link™

The software and adapter utilize the SAE J1939-13 heavy duty nine (9) pin connector which is located below the driver's side dash to the left of the steering column.

WARRANTY

The chassis manufacturer shall provide a limited parts and labor warranty to the purchaser of the custom built cab and chassis for a period of twenty-four (24) months, or the first 36,000 miles, whichever occurs first. The warranty period shall commence on the date the vehicle is delivered to the end user. The limited warranty may be transferred to subsequent owners during the warranty period. The warranty shall include conditional items listed in the detailed warranty document which shall be provided upon request.

CHASSIS OPERATION MANUAL

There shall be two (2) digital copies of the chassis operation manual provided with the chassis. The digital data shall include a parts list specific to the chassis model.

ENGINE AND TRANSMISSION OPERATION MANUALS

There shall be two (2) digital copies of the engine operation manual and two (2) digital copies of the transmission operation manual specific to the model ordered included with the chassis in the ship loose items.