

1800 GALLON SUPER TANKER #2590



TECHNICAL SPECIFICATIONS






- Freightliner 114 SD 2-Door Chassis
- Cummins 450 HP L9 Engine
- Allison 3000 EVS Automatic Transmission
- Heavy Duty Stainless Steel Body and Stainless Steel Subframe
- Intermediate Stainless Steel Pump Module with Stainless Steel Subframe
- Waterous CXVC20 1500 GPM Pump
- Trident Automatic Air Prime System
- FRC Pump Boss Max Pressure Governor
- FRC TankVision Water Tank Level Gauge with Three (3) Whelen PSTANK Strip Lites
- Two (2) 6" Intakes, One (1) Each Side
- One (1) 2½" Gated Intake, Left Side
- Two (2) 2½" Discharges, Left Side and One (1) 2½" Discharge, Right Side
- One (1) 2½" Discharge, Rear Right Side
- One (1) 3" Discharge Adapted to 5" Storz, Right Side
- One (1) 3" Discharge Dunnage Area with TFT Crossfire Deck Gun with Extenda-Gun
- Two (2) 1½" and One (1) 2½" Crosslay Preconnects
- One (1) 2½" Bumper Extension Preconnect Adapted to 1½" NSTM
- One (1) Booster Reel with 100' of 1" Booster Hose, Rear Below Dump
- Three (3) Dual Air Bottle Wheel Well Compartments
- One (1) Fire Extinguisher Wheel Well Compartment
- ROM Roll Up Doors
- Zico Hydraulic Folding Tank Bracket, Left Side
- Ladder Storage Through the Tank, Left Side
- Suction Hose Storage on Fol-Da-Tank Rack
- 1800 Gallon Poly Wetside Tank with Wetside Hose Bed & Front Fill Tower
- One (1) 4" x 5" Storz FirePrograms Tank Fill, Rear Left Side and One (1) 2½" FirePrograms Tank Fill, Rear Right Side
- One (1) 10" Newton Stainless Steel Electric Swivel Dump, Rear
- 12 Volt Electrical System with NFPA Compliant Warning Light Package
- Progressive Dynamics Battery Charger, L1 Compartment
- Kussmaul 20 Amp Super Auto-Eject 120V Shoreline Connection, Left Front Body Post
- Kussmaul Auto Air Eject, Left Front Body Post
- Whelen LED Warning Lights
- Whelen 200W Siren and 100W Speaker
- Federal Q2B Siren
- Two (2) FireTech HiViz 21" LED Scene Light Bars, One (1) Each Side
- One (1) FireTech HiViz 8" LED Scene Light Bar, Rear Left Side
- One (1) 10' Attic Ladder, One (1) 14' Roof Ladder with Hooks, One (1) 24' 2-Section Ladder, One (1) 2100 Gallon Fol-Da-Tank and Two (2) 10' Lengths of 6" Suction Hose
- 10' Overall Height
- 29'-6" Overall Length
- 208" Wheelbase
- 142.40" Cab to Axle
- 16,000 FAWR
- 31,000 RAWR
- 47,000 GVWR



DATE:

BILLY'S CREEK-0001

IN THE EVENT THERE ARE DISCREPANCIES BETWEEN THE DRAWING AND THE SPECIFICATIONS, THE SPECIFICATIONS SHALL PREVAIL.

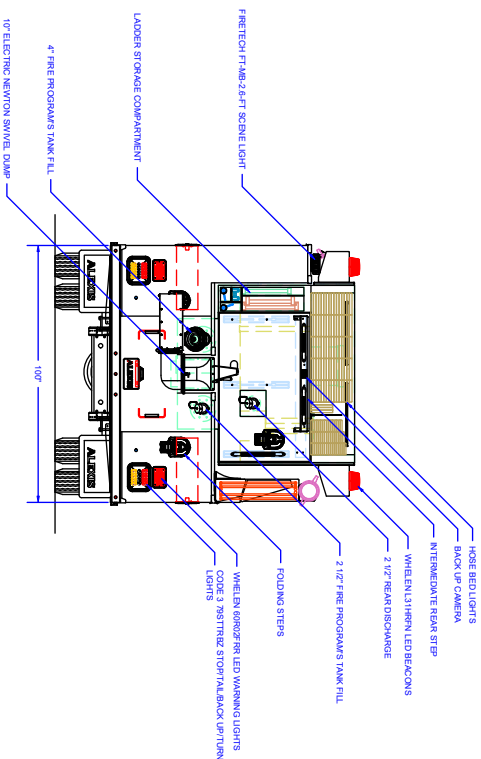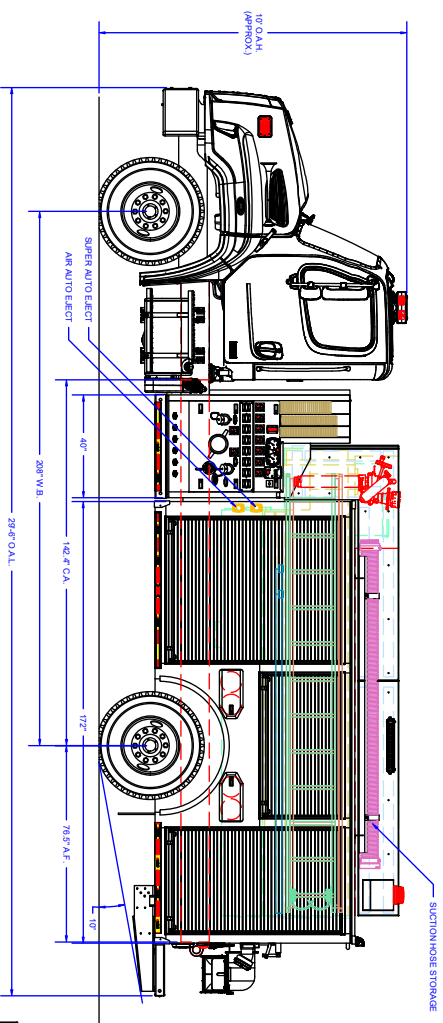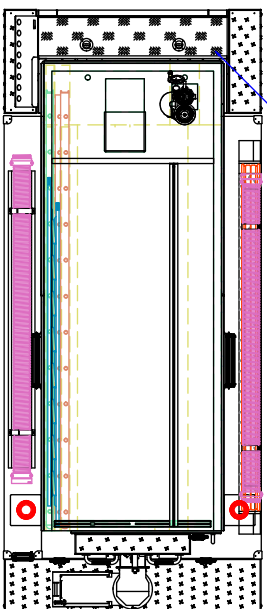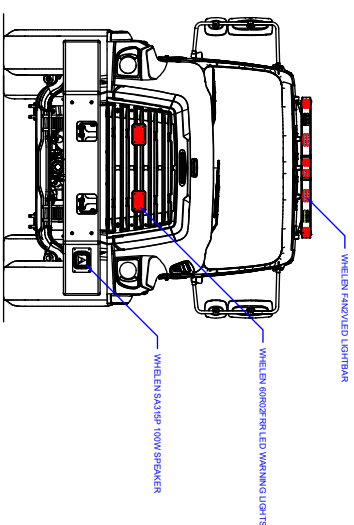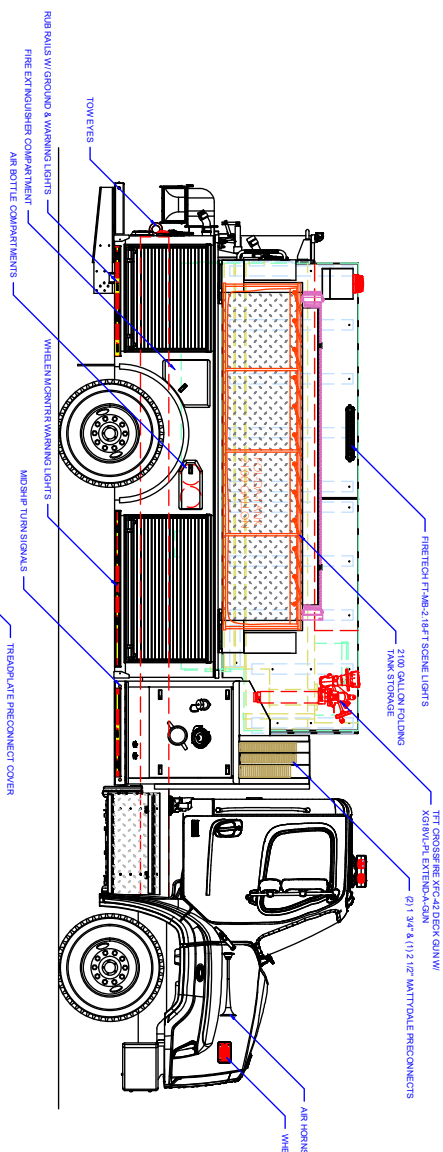

COMPARTMENT DIMENSIONS

COMP #	DOOR OPENING SIZES
--------	--------------------

L1	55" WIDE X 64" HIGH X 12"125" DEEP
L2	54" WIDE X 37" HIGH X 12" DEEP

39" WIDE X 21" HIGH X 12" DEEP	
L3	39" WIDE X 64" HIGH X 12" X 25" DEEP

R1	55" WIDE X 27" HIGH X 25" DEEP
R2	39" WIDE X 27" HIGH X 25" DEEP

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES
TOLERANCES ARE NOT CUMULATIVE

ALEXIS FIRE EQUIPMENT CO.
P.O. BOX 549, ALEXIS, ILLINOIS 61412

SUPER TANKER

BILL'S CREEK FIRE DEPT

LAKE LURE, NC

DWG NO ST-A38

2590	SHEET 1
------	---------

P				
C				
P				
REVISION HISTORY				
	REV	DESCRIPTION	DATE	DWN
				P
				P

Pump Info:	
Control Location: Under Tank	Apparatus Type: Tanks
Pump Drive: Split Shaft	Chassis:
Pump Make: Watrous	Tank Capacity: 1800
Pump Model: CXYC20	
Pump GPM: 1500	Material: Stainless Steel