


TOP CONTROL EQUALIZER PUMPER

BLACKHAWK FIRE PROTECTION DISTRICT / MILAN, ILLINOIS



ALEXIS

THANK YOU TO THE BLACKHAWK FIRE PROTECTION DISTRICT FOR THE PURCHASE OF THIS UNIT.

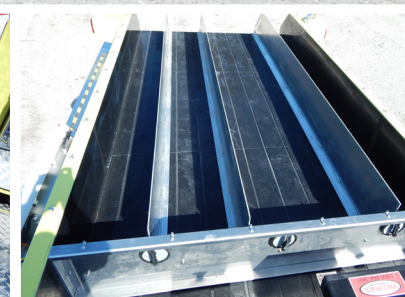

TECHNICAL SPECIFICATIONS

- Spartan Metro Star Chassis
- MFD with 10" Raised Roof
- FFC Advanced Occupant Protection System
- 450 HP Cummins Engine
- Allison EVS 3000 Transmission
- 24" Front Bumper Extension with Front Intake
- Heavy Duty 304 Stainless Steel Body
- Sub-Frame- Stainless Steel
- Two (2) SCBA Wheel Well Compartments
- ROM Painted Roll UP Doors
- 1000 Gallon Poly Tank
- 2.5" Fire Programs Direct Tank Fill
- Top Control Pump Panel
- Waterous CXS 1500 GPM Pump
- Trident Automatic Air Primer
- Two (2) TFT Intake Ball Valves
- FRC Pump Boss Governor Throttle System
- Discharges-Two (2) 2.5" Left, One (1) 2.5" Right, One (1) 3" Right, One (1) 3" Rear, One (1) Bumper Preconnect, and Two (2) 1.5" Cross Lay Preconnects
- 3" Monitor Piping, TFT Extend-A-Gun with TFT XFC-52 Cross Fire Deck Gun
- Waterous Aquis 3.0 Foam System with 20 Gallon Integral Foam Tank
- Waterous Foam Refill System
- Assortment of Adjustable Shelves, Trays, Pac Trac Boards, Back Board Storage and Zico Multiple Extrication Tool Holder
- Wireless Fire Com 3010 Communication System
- Rub Rail LED Ground and LED Warning Lights
- Whelen Warning Light Package
- Whelen Electric Siren with speaker and Q Siren
- Nathan Air Chime K5LA Train Horn System
- NFPA Stripping and Rear Chevron Striping
- 10' 4" Overall height
- 34' 1" Overall length
- 199" Wheelbase
- 145" Cab to Axle
- 21,500 LB FAWR
- 31,000 LB RAWR
- 52,500 LB GVWR



To view more photos and download spec sheet, please visit us at AlexisFire.com.

