




3000 GALLON TANKER #2652



TECHNICAL SPECIFICATIONS

- International HX620 2-Door Chassis
- International S13 475 HP Engine
- Allison 4500 EVS Automatic Transmission
- Heavy Duty Stainless Steel Body and Stainless Steel Subframe
- Stainless Steel Side Control Pump Module with Stainless Steel Subframe
- Hale QMAX-XS 1500 GPM Pump
- Trident Automatic Air Prime System
- FRC InControl 400 Pressure Governor
- FRC Tankvision Water Tank Level Gauge with Three (3) Whelen PSTANK2 Strip Lites
- Two (2) 6" Intakes, One (1) Each Side with Electric Steamer Gates
- One (1) 2½" Gated Intake, Left Side
- Three (3) 2½" Discharges, Two (2) Left Side and One (1) Right Side
- One (1) 4" Discharge Adapted to 5" Storz, Right Side
- One (1) 4" Discharge Adapted to 5" Storz, Rear Left Side
- FoamLogix 2.1A Foam System with 20 Gallon Tank and E-Z Fill Foam Tank Refill System
- One (1) 3" Discharge Dunnage Area with TFT Crossfire Deck Gun and Extenda-Gun
- Two (2) 1½" and One (1) 2½" Crosslay Preconnects
- Two (2) 2½" Preconnects Front of Hosebed, One (1) Each Side
- One (1) Booster Reel Pump Module Dunnage Area with 150' of 1" Booster Hose
- Beveled Lap Type Hinged Doors
- Two (2) Single Air Bottle Wheel Well Compartments
- One (1) Daul Air Bottle Wheel Well Compartment
- One (1) Fire Extinguisher Wheel Well Compartment
- Zico Electric Fol-Da-Tank Bracket for 3000 Gallon Fol-Da-Tank, Left Side Compartment Top
- Suction Hose Storage, Left Side on Fol-Da-Tank Rack
- Suction Hose Storage for Two (2) 12' Lengths, Right Side Vertical Through Body
- Ladder Storage, Right Side Vertical Through Body
- Stainless Steel Access Ladder with Flip Down Step, Rear Left Side
- 3000 Gallon Poly Tank
- Two (2) 2½" FirePrograms Tank Fills, Rear One (1) Each Side
- One (1) 10" Newton Stainless Steel Electric Dump with 36" Manual Extension, Rear
- Two (2) 10" Round Air Dumps with Air Operated Extensions, One (1) Each Side
- 12 Volt Electrical System with NFPA Compliant Warning Light Package
- Progressive Dynamics Battery Charger, L1 Compartment
- Kussmaul 20 Amp Super Auto-Eject 120V Shoreline Connection, Left Front Body Post
- Kussmaul Auto Air Eject, Adjacent to Electrical Inlet
- Whelen LED Warning Light Package with Cencom CORE System
- Whelen Siren and 100W Speaker
- Federal Q2B Siren
- Six (6) Whelen PFH2 Pioneer LED Scene Lights, Two (2) Each Side and Two (2) Rear
- One (1) Whelen Summit LED Brow Light
- One (1) 28' 2-Section Ladder, One (1) 16' Roof Ladder with Hooks, One (1) 10' Attic Ladder, One (1) 10' Length of 6" Suction Hose and Two (2) 12' Lengths of 6" Suction Hose
- 11'-1" Overall Height
- 33'-10" Overall Length
- 256" Wheelbase
- 188.9" Cab to Axle
- 20,000 FAWR
- 46,000 RAWR
- 66,000 GVWR



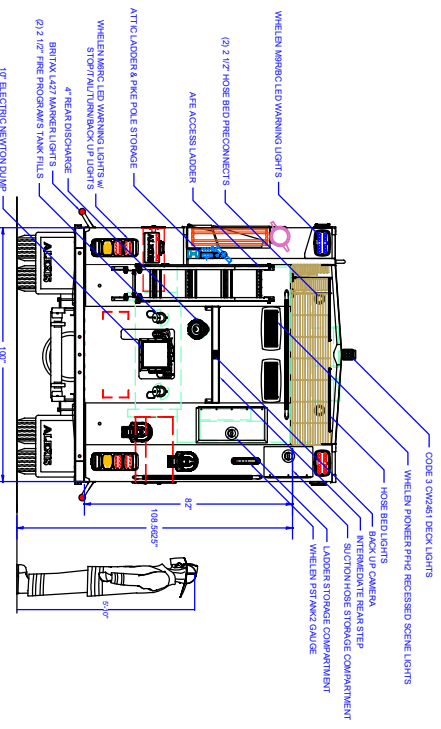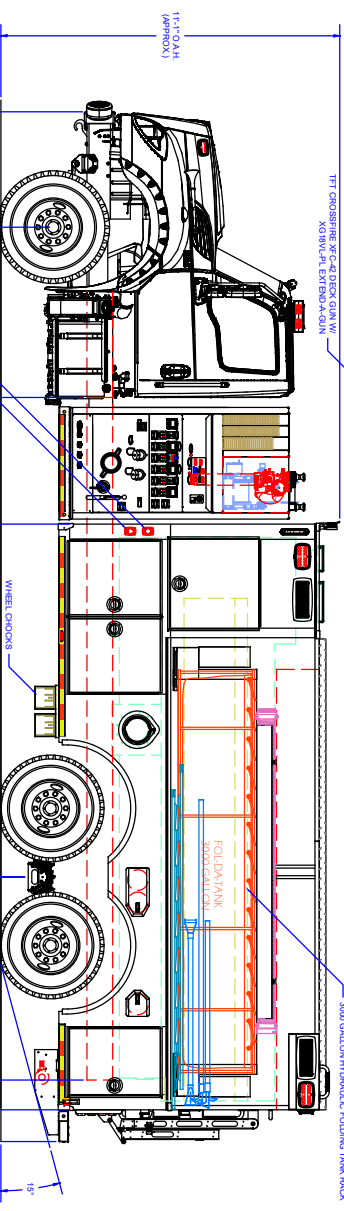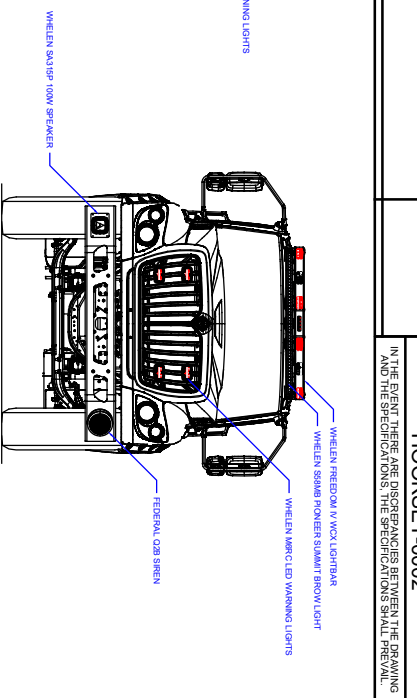

AI EXIS FIRE EQUIPMENT CO.

DOOR OPENING SIZES		#
DESIRED	AVAILABLE - (AS SHOWN)	
TOLERANCES ARE NOT CUMULATIVE		
DECIMAL ± 0.002	ANGULAR $\pm 0.5^\circ$	
FRACTIONAL $\pm 1/16$	METRIC ± 0.13 mm	

32" WIDE X 34" HIGH X 12" DEEP	THE COPYRIGHT © 1999 BY THE HOOKSET FIRE DEPARTMENT
56" WIDE X 34" HIGH X 25" DEEP	The copyright of this drawing and design and the right of reproduction there is, withheld
64" WIDE X 34" HIGH X 25" DEEP	

24" WIDE X 34" HIGH X 23" DEEP	in and belongs to Always Fine Equipment Co.	HOOKSET, 1NH
58" WIDE X 67" HIGH X 121/23" DEEP		
56" WIDE X 30" HIGH X 12" DEEP		

56" WIDE X 30" HIGH X 12" DEEP	C SHUCK	1/31/24	D	1/2" = 1'	P-AB356
50" WIDE X 30" HIGH X 12" DEEP					
24" WIDE X 67" HIGH X 12 1/2" DEEP	MATERIAL	CONTRACT #	2652	SHEET 1 OF 2	