

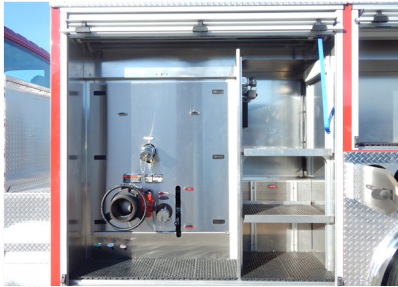
COMMERCIAL TOP CONTROL EQUALIZER PUMPER

KEWANEE COMMUNITY FIRE PROTECTION DISTRICT/ KEWANEE, IL

ALEXIS



THANK YOU TO THE KEWANEE COMMUNITY FIRE PROTECTION DISTRICT FOR THE PURCHASE OF THIS UNIT.




TECHNICAL SPECIFICATIONS

- International MV 607 Two Door Chassis
- Cummins L9 350 HP Diesel Engine
- Allison 3000 EVS Transmission
- Hale DSD 1250 GPM Pump
- Trident 3-Barrel Air Primer
- Two (2) Akron Model 7983 Revolution Butterfly Valves
- FRC Pump Boss Pressure Governor
- Stainless Steel Manifold and Plumbing
- Top Control Operator and Discharge Panels Incorporated in the Body
- Discharges-2.5" One (1) Left & One (1) Right, 3" Discharges-One (1) Right & One (1) Left, Preconnects-Two (2) 1.5" Module
- One (1) 2.5" Gated Intake, Left Side
- 3" Fix Monitor Piping for Deck Gun
- Heavy Duty Aluminum Body & Sub Frame
- Ladder & Suction Hose Storage Thru Tank-Ground Accessible
- Four (4) Dual Wheel Well Air Bottle Compartments
- ROM Stain Finished Roll Up Doors
- Assortment of Adjustable Shelves, Roll Out Trays, Hinged Pac Trac Swing Out Tool Board, Zico Quic Index SCBA Bracket, & Duratile
- Krystal Lite-Strip LED Compartment Lights
- 1000 Gallon Poly Tank
- Floor Mounted Console with Switches, Radios, Siren, etc
- Progressive Dynamics Charger / Viar Compressor with Kussmaul Auto Eject
- Whelen Warning Light Package
- Rub Rail LED Warning Lights and LED Ground Lights
- Whelen Electronic Siren and Speaker
- Rear Scene Lights-8" FireTech 12 V LED
- Two (2) FRC SPA 12V Telescopic LED Scene Lights
- NFPA Striping and Chevron
- 9' 11" Overall height
- 30' 2" Overall length
- 213" Wheelbase
- 145.7" Cab to Axle
- 12,000 LB FAWR
- 26,000 LB RAWR
- 38,000 LB GVWR






To view more photos and download spec sheet, please visit us at AlexisFire.com.

— WHELEN 60-R LED WARNING LIGHTS



WHEN MICROPLASTIC WARNING LIGHTS

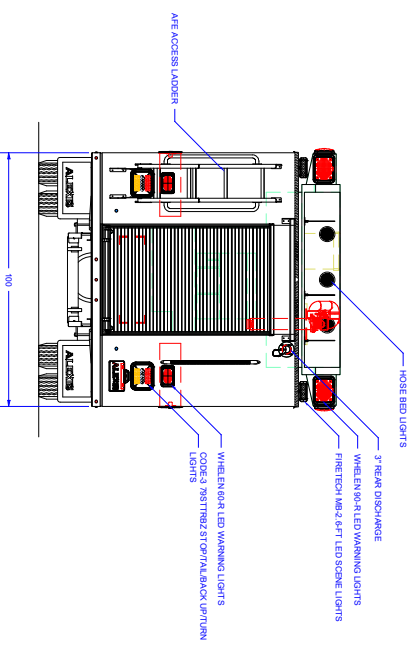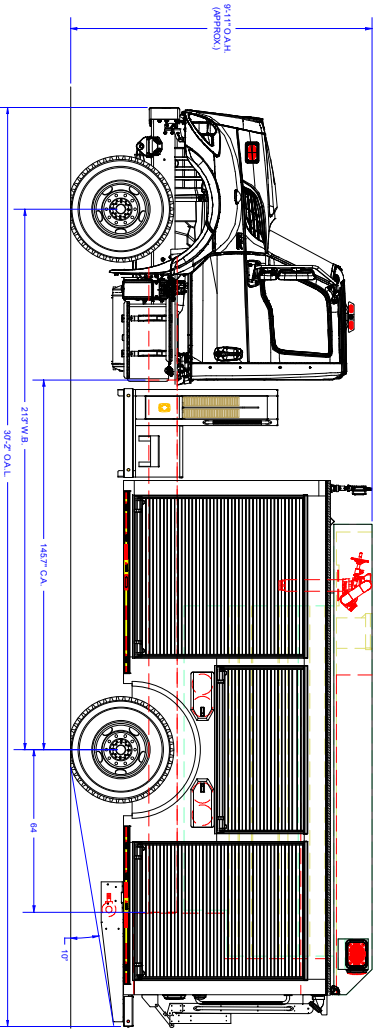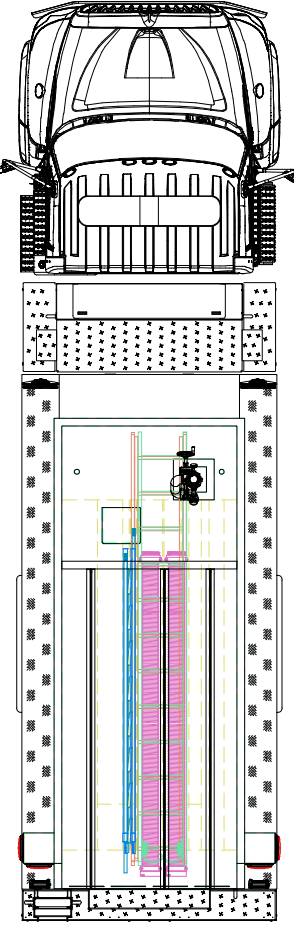[illegible]