

## 2000-GALLON TANKER #2502



### TECHNICAL SPECIFICATIONS

Heavy Duty 304 Stainless-Steel Body and 304 Stainless-Steel Sub-Frame with Lifetime Warranty

ROM Series IV Painted Roll-Up Doors

Two (2) compartments on each side with one (1) adjustable shelf and dual LED strip lights in each compartment

Storage for a 2100 Gallon Fol-Da-Tank – ground accessible on the left side compartment top

Storage for Two (2) 10' lengths of hard suction hose – ground accessible on the right side compartment top

Alexis custom ladder brackets for a 24' 2-Section Ladder and 14' Roof Ladder with Hooks – ground accessible on the right side compartment tops outboard of the suction hose storage

Waterous CXV 1500 GPM Split Shaft Pump

Alexis Custom Stainless Steel Cast Manifold system with 10 Year Warranty

Trident Air Prime System

Stainless-Steel Intermediate Pump Module

FRC Pump Boss Pressure Governor & Monitoring System

Two (2) 6" Intakes, One (1) Each Side

One (1) 2½" Gated Intake, Left Side

Two (2) 2½" Discharges, Left Side

One (1) 2½" Discharge, Right Side

One (1) 3" Discharge, Right Side Adapted to 5" Storz

One (1) 2½" Discharge, Rear

One (1) Akron Apollo 3433 Hi Riser Deck Gun

One (1) 1½" Mattydale Preconnect and One (1) 2½" Mattydale Preconnect

2000-Gallon Poly Tank

One (1) 10" Newton Stainless-Steel Manual Swivel Dump, Rear

Two (2) Rear FirePrograms Tank Fills – one (1) 4" x 5" Storz with elbow and one (1) 2½"

Wetside Hosebed with Rear Fill Tower

One (1) Center Console with Switches

Progressive Dynamics Battery Charger with Viair Compressor, L1 Compartment

Kussmaul 20 Amp Super Auto-Eject 120V Shoreline Connection, Left Front Body Post

Whelen Warning and Scene Light Package

One (1) Back-Up Camera with Cab Display

Freightliner M2-112 Crew Cab Chassis

Cummins 450 HP L9 Engine

Allison 3000 EVS Automatic Transmission

Three (3) HO Bostrom SCBA seats with Secureall SCBA Brackets – Officer and two (2) rear

10'-2" Overall height

30' 11" Overall length

247" Wheelbase






134.4" Cab to Axle

16,000 FAWR

31,000 RAWR

47,000 GVWR

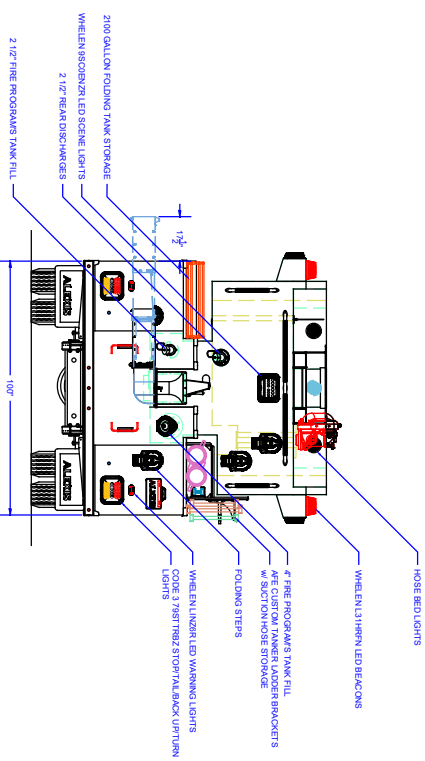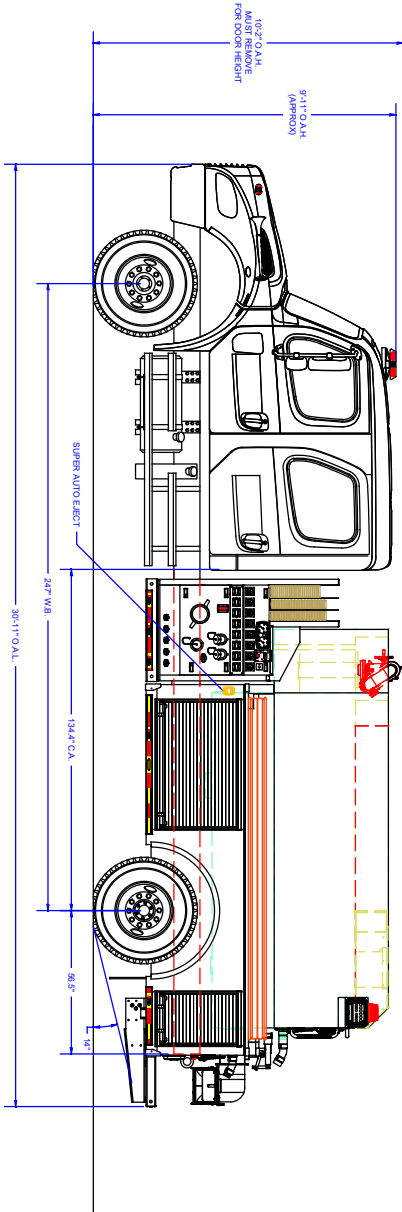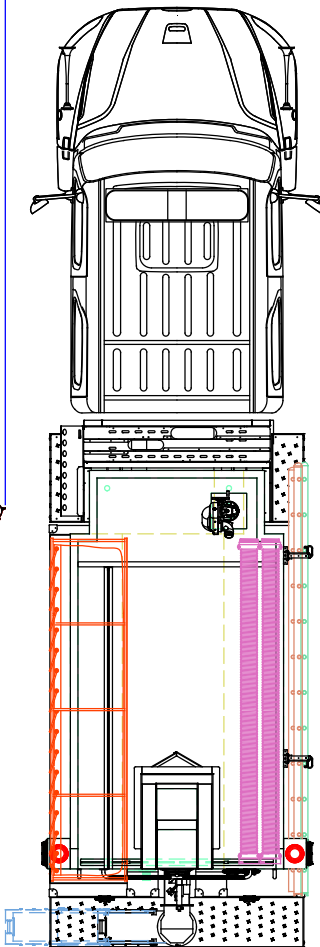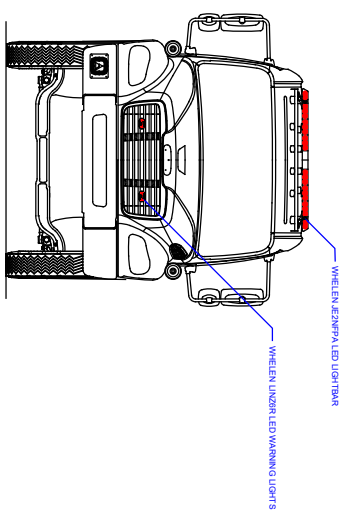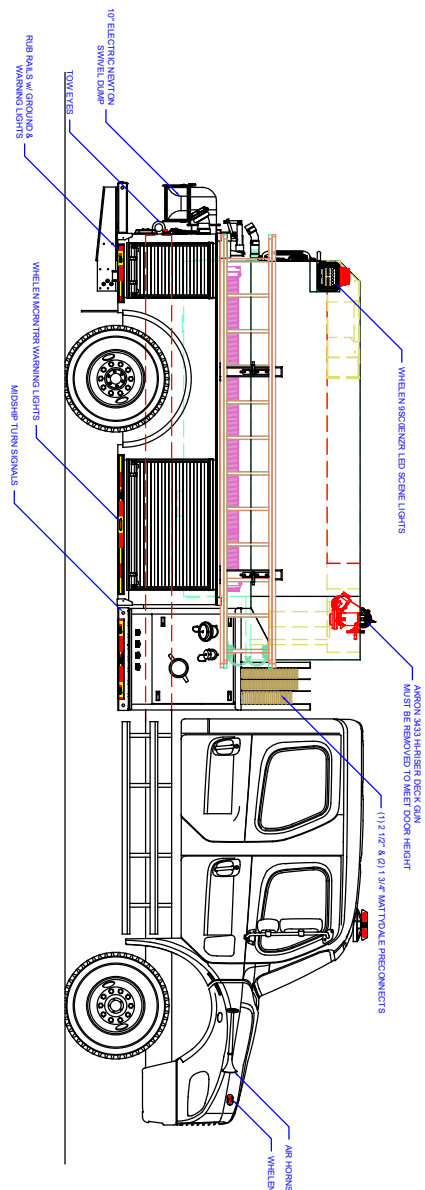

[illegible]