


2000 GALLON TANKER #2592



TECHNICAL SPECIFICATIONS

- Freightliner M2 112 2-Door Chassis
- Cummins L9 450 HP Diesel Engine
- Allison 3000 EVS Automatic Transmission
- Heavy Duty Aluminum Body and Subframe
- Intermediate Pump Module
- Waterous CXVPA 750 GPM PTO Pump
- Trident Air Prime System
- FRC Pump Boss Max Pressure Governor
- FRC TankVision Water Tank Level Gauge with Three (3) FRC MaxVision Strip Lites
- Two (2) 6" Intakes, One (1) Each Side
- One (1) 2½" Gated Intake, Left Side
- Two (2) 2½" Discharges, Left Side and One (1) 2½" Discharge, Right Side
- One (1) 3" Discharge Adapted to 5" Storz, Right Side
- One (1) 3" Discharge Dunnage Area with TFT Hurricane Deck Gun with Extenda-Gun
- Two (2) 1½" Crosslay Preconnects
- ROM Roll Up Doors
- Fol-Da-Tank Storage for 2000 Gallon Fol-Da-Tank, Right Side Compartment Top
- Suction Hose Storage, Left Side Compartment Top
- 2000 Gallon Poly Wetside Tank with Wetside Hose Bed & Rear Fill Tower
- Two (2) 2½" Tank Fills with Ball Valves, Rear One (1) Each Side
- One (1) 10" Electric Newton Stainless Steel Swivel Dump with 36" Manual Extension, Rear
- 12 Volt Electrical System with NFPA Compliant Warning Light Package
- Progressive Dynamics Battery Charger with Viar Compressor, L1 Compartment
- Kussmaul 20 Amp Super Auto-Eject 120V Shoreline Connection, Left Rear Wheel Well
- Whelen LED Warning Lights with Rear Arrow Stick
- Whelen 200W Siren and 100W Speaker
- Federal Q2B Siren
- Two (2) FireTech HiViz 27" LED Scene Light Bars, One (1) Each Side
- Two (2) Whelen 9S LED Scene Lights, One (1) Each Side Rear
- One (1) Pioneer Summit LED Brow Light
- Two (2) 10' Lengths of 6" Hard Suction Hose and One (1) 2000 Gallon Single lane Fol-Da-Tank
- 10' Overall Height
- 27'-8" Overall Length
- 214" Wheelbase
- 148.45" Cab to Axle
- 16,000 FAWR
- 31,000 RAWR
- 47,000 GVWR

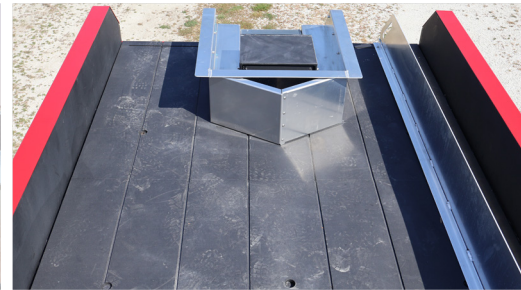

