

TOP MOUNT EQUALIZER PUMPER #2589




TECHNICAL SPECIFICATIONS

- Spartan FC94 MFD 10" Raised Roof Chassis
- Cummins L9 450 HP Diesel Engine
- Allison 3000 EVS Transmission
- Heavy Duty Stainless Steel Body with Stainless Steel Subframe
- Integrated Top Mount Pump Module
- Waterous CXVC 1500 GPM Pump
- Trident Air Primer
- FRC Pump Boss Max Pressure Governor Monitoring System
- FRC Tankvision Water Tank Level Gauge with Three (3) Whelen PSTANK2 Strip Lites
- Two (2) 6" Intakes, One (1) Each Side and One (1) 5" Rear Intake with Electric Valves
- Two (2) 2½" Gated Intakes, One (1) Each Side
- One (1) 2½" Discharge, Each Side
- One (1) 3" Discharge Adapted to 5" Storz, Right Side
- One (1) 3" Discharge Adapted to 2½" MNST, Rear Right
- FoamPro 1600 Foam System with 20 Gallon Foam Tank
- One (1) 3" Deck Gun Discharge in Dunnage Area with Elkhart Stinger Deck Gun and
- TFT Extenda-Gun
- One (1) 2½" Preconnect, Hose Bed Bulkhead, Left Side
- Two (2) 1½" Crosslay Preconnects Behind Cab
- One (1) 1½" Bumper Extension Preconnect
- ROM Painted Roll-Up Doors
- Three (3) Dual Wheel Well Air Bottle Compartments
- Ladder Storage Horizontal in Rear Compartment with Two (2) Suction Hose
- Stainless Steel Rear Access Ladder, Left Side
- 1000 Gallon Poly Tank with Hose Bed
- 12 Volt Electrical System with NFPA Compliant Warning Light Package
- Tecniq LED Warning Light Package with Rear Whelen Arrow Stick
- Kussmaul Chief 4012 Battery Charger
- Kussmaul 20 Amp Super Auto-Eject 120V Shoreline Connection, Left Side
- Q2B Mechanical Siren
- Two (2) FireTech HiViz 40" LED Scene Light Bars, One (1) Each Side
- Two (2) FireTech HiViz 8" LED Scene Light Bars, Rear
- One (1) FireTech HiViz 72" LED Brow Light
- Two (2) Whelen 900 LED Scene Lights, One (1) Each Side of the Cab
- One (1) 10' Attic Ladder, One (1) 14' Roof Ladder with Hooks, One (1) 24' 2-Section Ladder, and Two (2) 10' Lengths of 6" Suction Hose
- 10'-1" Overall Height
- 34' 1" Overall Length
- 199" Wheelbase
- 145" Cab to Axle
- 21,500 FAWR
- 31,500 RAWR
- 53,000 GVWR



IN THE EVENT THERE ARE DISCREPANCIES BETWEEN THE DRAWING AND THE SPECIFICATIONS THE SPECIFICATIONS SHALL PREVAIL

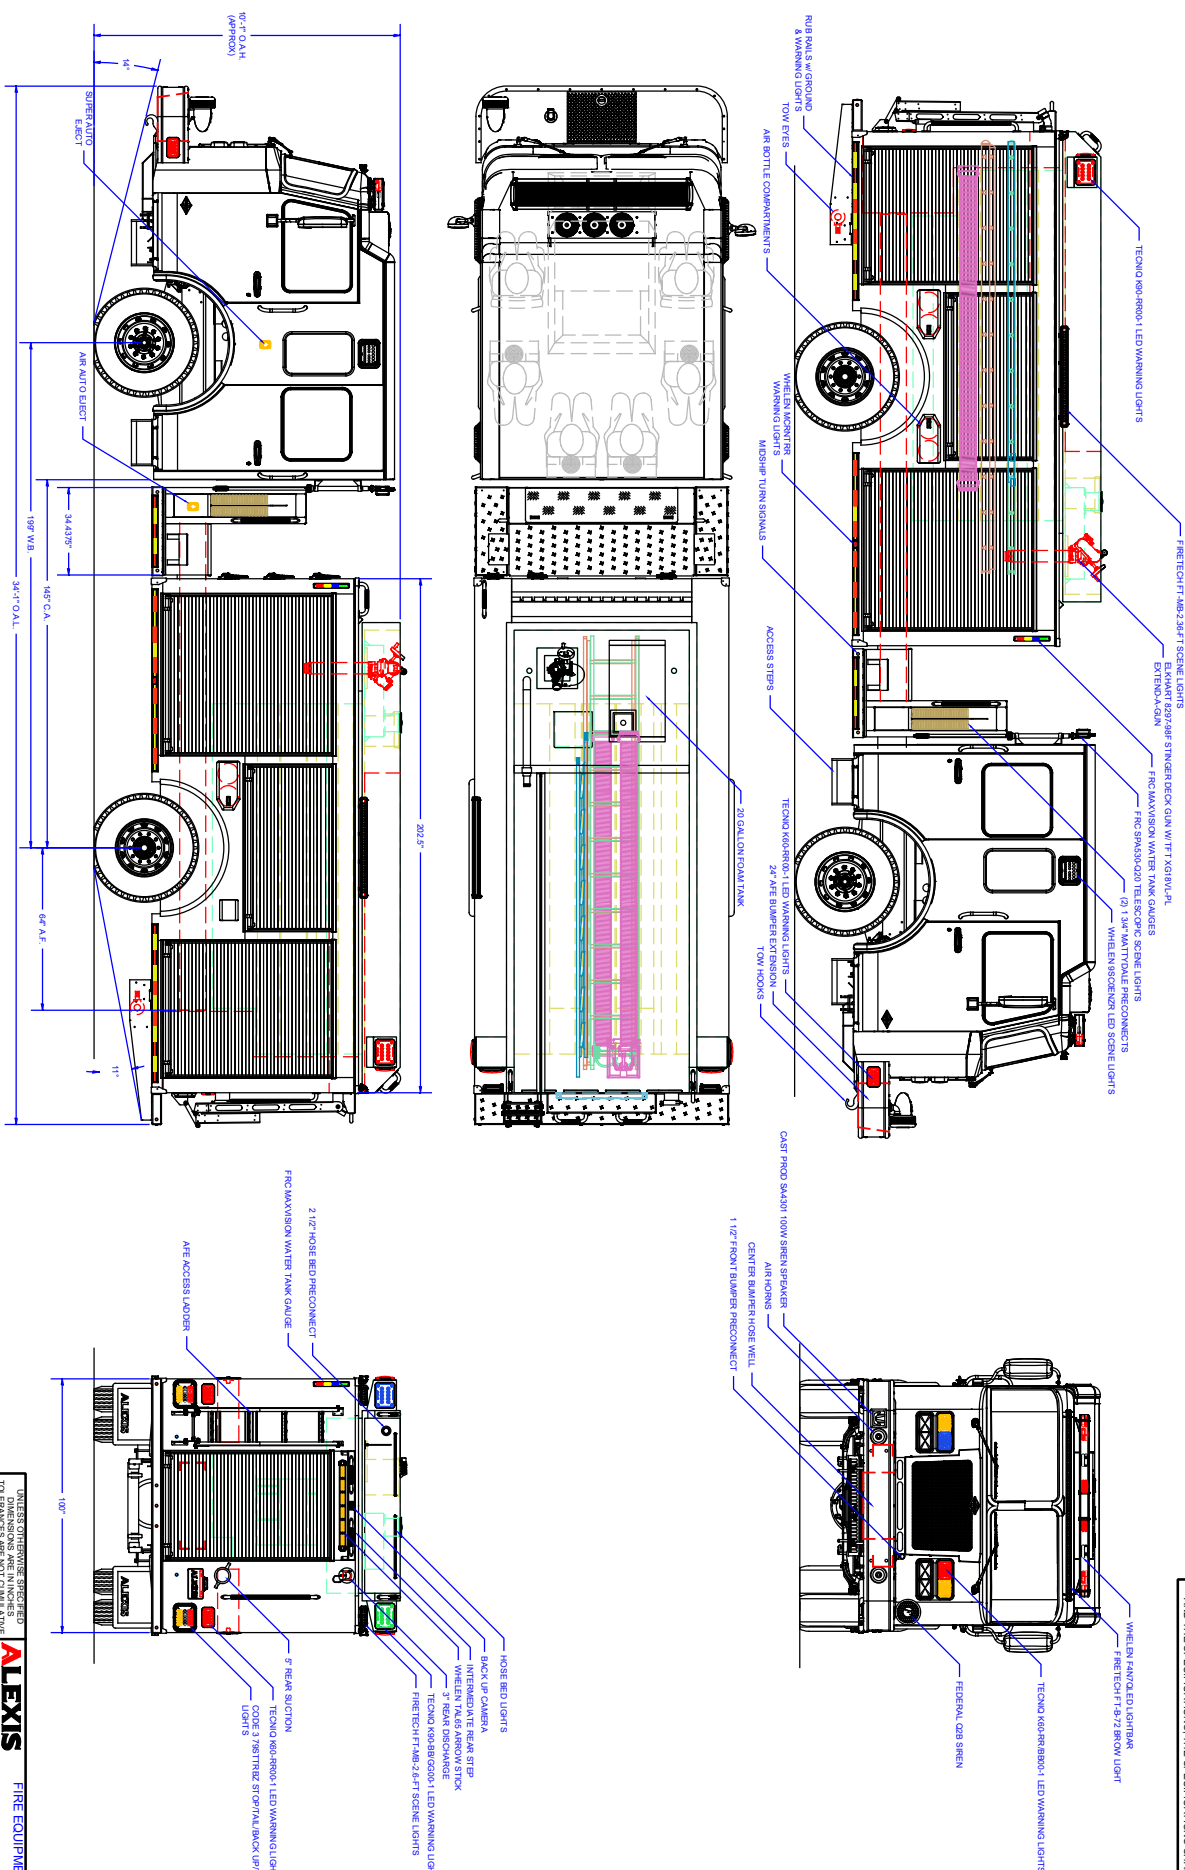

COMPARTMENT DIMENSIONS

DOOR OPENING SIZES

COMP. #	DOOR OPENING SIZES
L1 & R1	61" WIDE X 62" HIGH X 26" DEEP
L2 & R2	63" WIDE X 30" HIGH X 26" DEEP
L3 & R3	52" WIDE X 62" HIGH X 26" DEEP
REAR	41" WIDE X 67" HIGH X 12/20" DEEP

REVISION HISTORY

REV	DESCRIPTION	DATE	BY	APP
01	CHANGE ORDER A AS SOLD UPDATES	4/17/25	WJT	Pump Drive: Spill Shift
02	AS SOLD UPDATES	3/25/25	QAS	Pump Make: Watrous
03	AS SOLD UPDATES	11/23/24	WJT	Pump Mode: CXC/C20
04	AS SOLD UPDATES	11/23/24	WJT	Pump GPM: 1500

Control Location: Top

Apparatus Type: Pumper
Chassis: SPARTAN FC-34 MFD
Tank Capacity: 1000
Material: Stainless Steel

ALEXIS FIRE EQUIPMENT CO.
P.O. BOX 549, ALEXIS, ILLINOIS 62412

1000 GALLON EQUALIZER
MINIONK FIRE PROT DIST
MINIONK, IL

SIZE CODE: EQ-885
D 1/2" x 1"

CONTRACT # 2589