

TOP CONTROL EQUALIZER PUMPER


ROANOKE FIRE PROTECTION DISTRICT / ROANOKE, ILLINOIS



ALEXIS



THANK YOU TO THE ROANOKE FIRE PROTECTION DISTRICT FOR THE PURCHASE OF THIS UNIT.

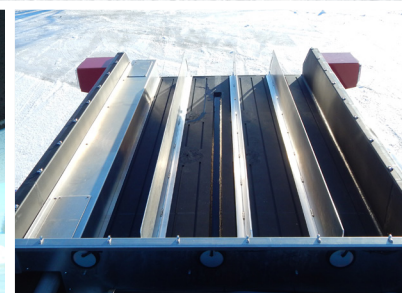

TECHNICAL SPECIFICATIONS

- Spartan Metro Star EMFD 10" Raised Roof Chassis
- Cummins L9 450-HP Diesel Engine
- Allison 3000 EVS Automatic Transmission
- Heavy Duty Stainless-Steel Body and Sub-Frame
- Six (6) Person Cab Seating w/ Five (5) SCBA Seats
- ROM Painted Roll-up Doors
- Waterous CXSC20 1500 GPM Pump
- 1000-Gallon Poly Tank w/ 20-Gallon Foam Tank
- Two (2) 6" Suctions, One (1) Each Side
- Three (3) 2 1/2" Discharges, Two (2) Left, One (1) Right
- Three (2) 3" Discharges, One (1) Right, One (1) Rear, One (1) Deck Gun
- One (1) 2 1/2" Gated Suction, Left Side
- One (1) 2 1/2" Hosebed Preconnect
- Two (2) 1 1/2" Front Bumper Preconnects
- One (1) 2 1/2" Tank Fill, Rear
- Waterous Aquis 1.5 Foam System
- Akron Apollo Monitor w/ Task Force Tips Extend-a-Gun
- Three (3) Dual Air Bottle Wheel Well Compartments
- Ladder/Suction Hose Storage, Through the Tank
- FireCom Intercom System w/ Pump Panel Jack
- Whelen LED Warning Light Package
- Whelen Traffic Advisor Arrow Stick
- FireTech LED Scene Light Package
- Fire Research 360 Camera System
- Command Light Knight2 Light Tower
- Diamond Grade Chevron Striping, Rear
- 10' 1" Overall Height
- 34' Overall Length
- 194" Wheelbase
- 134" Cab to Axle
- 20,000 FAWR
- 27,000 RAWR
- 47,000 GVWR



To view more photos and download spec sheet, please visit us at AlexisFire.com.

