

TOP MOUNT EQUALIZER PUMPER



R.S.P.&E. FIRE PROTECTION DISTRICT / ROSEVILLE, IL



ALEXIS



THANK YOU TO R.S.P.&E. FIRE PROTECTION DISTRICT FOR THE PURCHASE OF THIS UNIT.

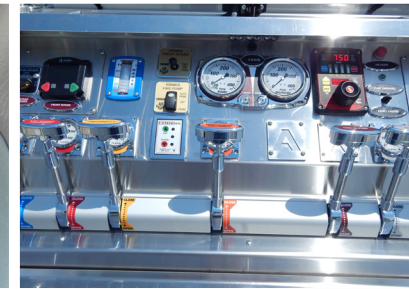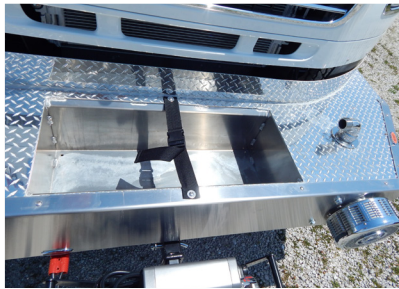

TECHNICAL SPECIFICATIONS

- Freightliner M2 106 4-Door Chassis
- Cummins L9, 350-HP Diesel Engine
- Allison 3000 EVS Automatic Transmission
- Heavy-Duty Stainless-Steel Body and Sub-Frame
- ROM Roll Up Doors
- 18" Bumper Extension
- On-Spot Chains
- Five (5) Person Cab Seating with Four (4) SCBA Seats
- 1250-Gallon Poly Tank
- Hale DSD, 1500-GPM Pump
- Three (3) 2½" Discharges, Two (2) Left, One (1) Right
- Two (2) 3" Discharges, One (1) Right Side and One (1) Rear
- One (1) 2½" Preconnect, Hose Bed
- Two (2) 1½" Cartridge Lay Preconnects
- One (1) 1½" Preconnect, Front Bumper
- One (1) 2½" Gated Suction, Left Side
- One (1) 5" Suction, Front
- Elkhart Cobra Deck Gun
- Ladder and Suction Storage, Through the Booster Tank
- Three (3) Dual Wheel Well Air Bottle Compartments
- Progressive Dynamics On-Board Battery Charger
- Kussmaul Auto Air Eject 120-Volt Shoreline Connection
- Floor Mounted Console for Emergency Switches with Map / Binder Storage, Cab
- Fire Research 360 Camera System with Four (4) Cameras and 7" Monitors
- FireCom Intercom System
- Federal Q2B Siren
- One (1) Whelen Siren with One (1) 100-Watt Speaker
- Whelen Arrow Stick
- Two (2) Firetech 40" Scene Lights, One (1) on Each Side
- Whelen Lederal Warning Light Package
- 9' 10" Overall Height
- 37' 7" Overall Length
- 283" Wheelbase
- 170.54" Cab to Axle
- 16,000 FAWR
- 31,000 RAWR
- 47,000 GVWR



To view more photos and download spec sheet, please visit us at AlexisFire.com.

