


MINI PUMPER #2617



TECHNICAL SPECIFICATIONS

- Ford F600 4x4 Super Duty 2-Door Cab
- 6.7L 4V OHV V8 Turbo Diesel Engine
- TorqShift 10-Speed Automatic Transmission
- Heavy Duty Stainless Steel Body and Stainless Steel Subframe
- Stainless Steel Side Control Pump Module with Stainless Steel Subframe
- Go Industries Black Brush Guard
- Hale DSD 1500 GPM Split Shaft Pump
- Hale ESP Priming Pump
- FRC InControl Pressure Governor
- FRC TankVision Water Tank Level Gauge with Three (3) FRC MaxVision Strip Lights
- Two (2) 6" Intakes, One (1) Each Side and One (1) 5" Intake Adapted to 6" NSTM, Rear Right
- One (1) 2½" Gated Intake Left Side
- Two (2) 1½" Crosslay Preconnects
- Two (2) 2½" Discharges, Left Side, One (1) 2½" Discharge, Right Side
- One (1) 2½" Rear Discharge, Right Side
- One (1) 4" Discharge Adapted to 5" Storz, Right Side
- One (1) 3" Discharge Dunnage Area with TFT Crossfire Deck Gun and TFT Extenda-Gun
- One (1) Booster Reel Over Pump with 100' of 1" Booster Hose
- Three (3) Single Bottle Wheel Well Compartments
- ROM Painted Roll-Up Doors
- Transverse Storage Module Ahead of the Pump Module
- Two (2) Hard Suction Storage Compartments, One (1) Each Side Above Compartments
- 300-Gallon Poly Tank
- 12 Volt Electrical System with NFPA Compliant Warning Light Package
- Progressive Dynamics Charger with Viarr Compressor and Auxiliary Air Tank
- Kussmaul 120V 20A Super Auto Eject, Left Rear Wheel Well
- Whelen LED Warning Light Package
- Whelen 200 Watt Siren & 100W Speaker
- Four (4) Whelen M9 LED Scene Lights, Two (2) Each Side and Two (2) Rear
- Two (2) Whelen M6 LED Scene Lights, One (1) Each Side of the Cab
- One (1) FireTech HiViz 46" LED Scene Light Bar, Front Grille Guard
- One (1) Whelen Arges 1 Spot Light, Driver's Side Front Fender
- Four (4) 8' Lengths of 6" Hard Suction Hose
- 8' 4" Overall Height • 7,500 FAWR
- 25' 8" Overall Length • 15,500 RAWR
- 193.3" Wheelbase • 22,000 GVWR
- 108" Cab to Axle

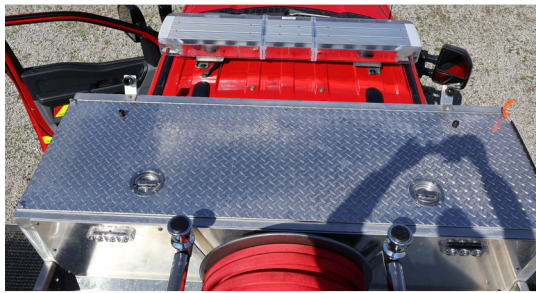

