ALEXIS

SHUMWAY FIRE PROTECTION DISTRICT / EFFINGHAM, ILLINOIS

2000 GALLON TANKER #2664



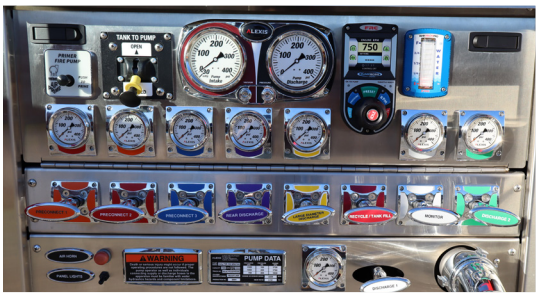





TECHNICAL SPECIFICATIONS

- Freightliner M2 106 2-Door Chassis
- Cummins 360 HP L9 Engine
- Allison 3000 EVS Automatic Transmission
- Heavy Duty Stainless Steel Body and Stainless Steel Subframe
- Stainless Steel Intermediate Pump Module
- Darley PSM 1500 GPM Pump
- Trident Air Prime System
- FRC Pump Boss Pressure Governor
- Three (3) FRC Tankvision Water Tank Level Gauges, One (1) each at the Panel, Rear, and In Cab Mini Display
- Two (2) 6" Intakes, One (1) Each Side
- One (1) 2½" Gated Intake, Left Side
- One (1) 2½" Discharge, Left Side and One (1) 2½" Discharge, Right Side
- One (1) 2½" Discharge, Rear Left Side
- One (1) 3" Discharge Adapted to 5" Storz, Right Side
- One (1) 3" Discharge Dunnage Area for Deck Gun
- Two (2) 1½" and One (1) 2½" Crosslay Preconnects
- One (1) Booster Reel in R1 with 100' of 1" Booster Hose
- ROM Roll Up Doors
- Fol-Da-Tank Storage for 2100 Gallon Fol-Da-Tank, Right Side Compartment Top
- Suction Hose Storage, Left Side Compartment Top
- 2000 Gallon Poly Wetside Tank with Wetside Hose Bed & Front Fill Tower
- Two (2) 2½" FirePrograms Tank Fill, Rear One (1) Each Side
- One (1) 10" Newton Stainless Steel Swivel Dump with 36" Manual Extension, Rear
- 12 Volt Electrical System
- Progressive Dynamics Battery Charger with Viair Compressor, L1 Compartment
- Kussmaul 20 Amp Super Auto-Eject 120V Shoreline Connection, Left Front Body Post
- Whelen LED Warning Light Package
- Whelen 200W Siren and 100W Speaker
- Two (2) Firetech HiViz 21" LED Scene Light Bars, One (1) Each Side
- One (1) Firetech HiViz 21" LED Scene Light Bar, Rear
- One (1) FireTech HiViz 21" LED Brow Light
- Two (2) 10' Lengths of 6" Hard Suction Hose and One (1) 2100 Gallon Fol-Da-Tank
- 9'-8" Overall Height
- 26'-6" Overall Length
- 200" Wheelbase
- 134.45" Cab to Axle
- 16,000 FAWR
- 31,000 RAWR
- 47,000 GVWR







CUSTOMER APPROVAL SIGNATURE:	DATE:	SHUMWAY-0002
		IN THE EVENT THERE ARE DISCREPANCIES BETWEEN THE DRAWING AND THE SPECIFICATIONS, THE SPECIFICATIONS SHALL PREVAIL.

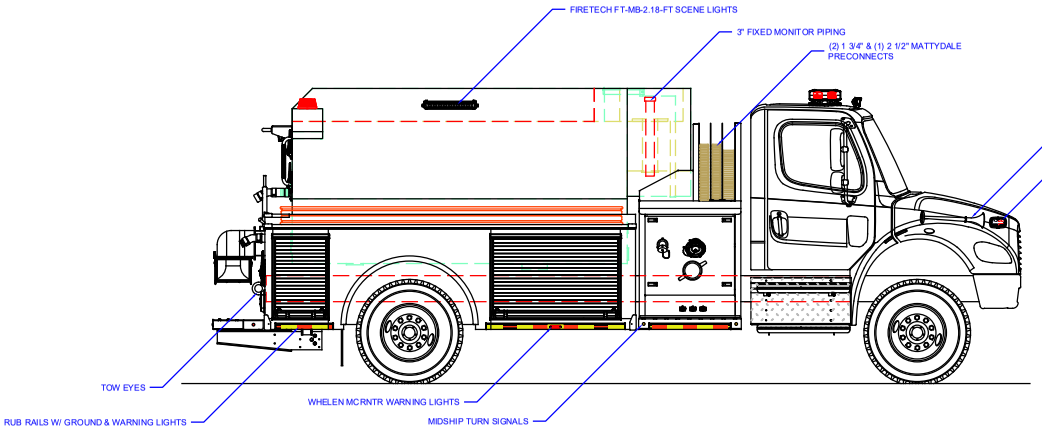

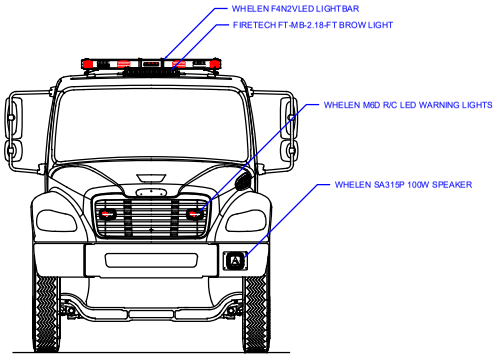

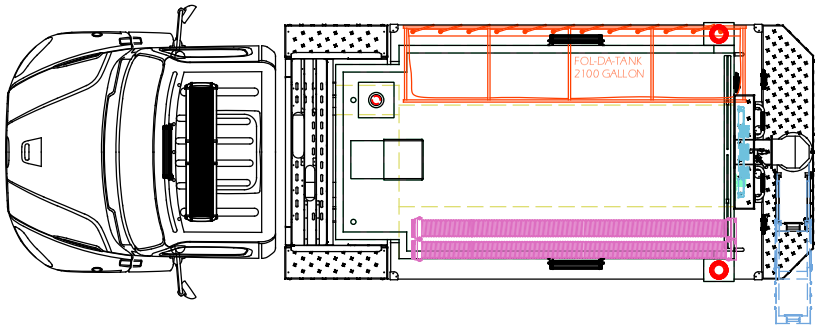

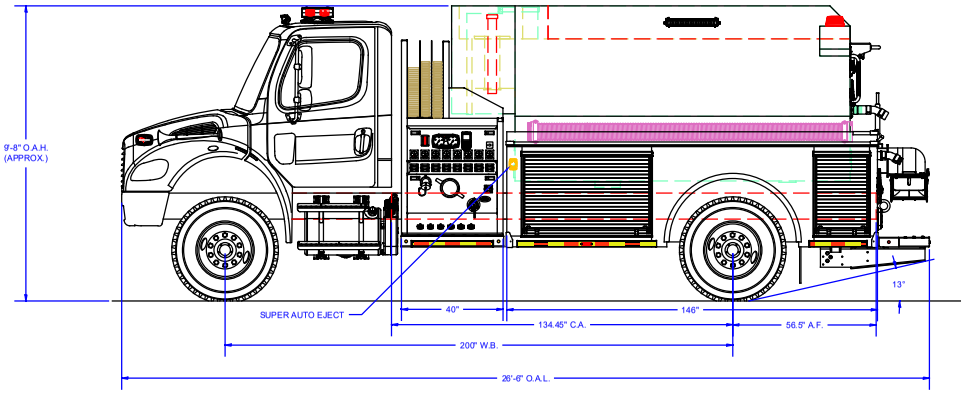

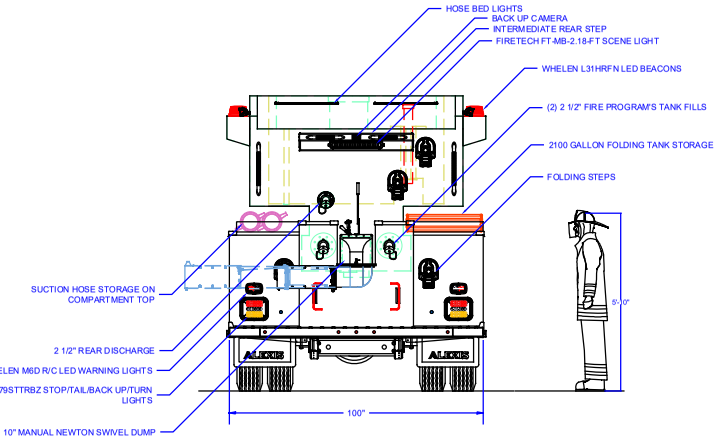

REVISION HISTORY			
REV	DESCRIPTION	DATE	DWN
01	SALES UPDATES	5/15/24	MLT

Pump Info:		
Control Location: Under Tank	Apparatus Type: Tanker	
Pump Drive: Split Shaft	Chassis: FREIGHTLINER M2 106 2-DR	
Pump Make: Darley	Tank Capacity: 2000	
Pump Model: PSM		
Pump GPM: 1500	Material: Stainless Steel	

COMPARTMENT DIMENSIONS

COMP #	DOOR OPENING SIZES
L1 & R1	49" WIDE X 27" HIGH X 26" DEEP
L2 & R2	19" WIDE X 27" HIGH X 25" DEEP

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES
TOLERANCES ARE NOT CUMULATIVE
DECIMAL ±0.062 ANGULAR ±0.5°
FRACTIONAL ±1/16 METRIC ±1.6 mm

The copyright of this drawing and design and the right of reproduction there is vested in and belongs to Alexis Fire Equipment Co.

ALEXIS FIRE EQUIPMENT CO.
P.O. BOX 549, ALEXIS, ILLINOIS 61412

TANKER
SHUMWAY FIRE PROT DIST
EFFINGHAM, IL

DRAWN		SIZE	SCALE	DWG NO
M. TINKHAM	2/26/24	D	1/2" = 1'	T-N09
MATERIAL		CONTRACT #	2664	SHEET 1 OF 2