

18' RESCUE UNIT #2486






TECHNICAL SPECIFICATIONS

- M2 106 Crew Cab Chassis
- Five (5) Person Cab with four (4) SCBA seats with IMMI SmartDock brackets
- Cummins L9 360 HP Diesel Engine
- Allison 3000 EVS Automatic Transmission
- Heavy-Duty 304 Stainless-Steel Body and Sub-Frame
- One (1) Norcold Refrigerator, L1 Compartment
- One (1) 1000# Transverse Roll Out Tray L1/R1 Compartments
- Three (3) 250# Drop-Down Roll Out Trays, One (1) Each L1, R1, R2 Compartments
- One (1) Custom Tool Chest, L2 Compartment
- One (1) 1000# Transverse Roll Out Tray L2/R2 Compartments
- Two (2) 250# Roll Out Trays, One (1) Each L3, R1, Rear Compartments
- One (1) Stokes Basket Transverse Storage Compartment, L3/R3 Compartments
- Four (4) Bottle Cascade System Rear Access with Spacesaver Two (2) Cylinder Vertical Fill Enclosure, L4 Compartment
- One (1) Cribbing Containment Compartment, L4 Compartment
- Two (2) 500# Roll Out Trays, One (1) Each R2, Rear Compartments
- Two (2) Vertical Pull Out Tool Boards, R4 Compartment
- Three (3) Dual Air Bottle Compartments, One (1) Left Side Ahead of Rear Wheels, Two (2) Right Side
- One (1) Fire Extinguisher Compartment, Left Side Behind Rear Wheels
- Progressive Dynamics Battery Charger with Kussmaul 20 Amp Super Auto-Eject 120V Shoreline Connection, Left Side Cab Step
- Smart Power HR 10.0kW Hydraulic Generator, Upper Walkway Mounted
- One (1) Hannay 150' Electric Cord Reel, Rear Compartment
- One (1) Hannay 200' Air Reel, Rear Compartment
- Whelen LED Warning Light Package
- 360° FireTech Scene Lighting
- Night Scan Powerlite Light Tower NS3.0-600 WHL with Four (4) 120V 150W Whelen PCP2ASF LEDs, 60,000 Total Lumens, Upper Walkway Mounted
- Whelen Traffic Advisor LED
- Aluminum Rub Rails with LED Ground Lights and LED Warning Lights
- AFE Stainless Steel Top Access Ladder
- Four (4) Top Storage Compartments
- Awning, Left Side Above the Compartments
- Federal Q2B Siren, Front Bumper Left Recess Mounted
- Whelen Electronic Siren & 100W Speaker
- 9' 8" Overall height
- 30' 6" Overall length
- 233" Wheelbase
- 120.5" Cab to Axle
- 16,000 FAWR
- 30,000 RAWR
- 46,000 GVWR



COVINGTON-0002

COVINGTON-0002

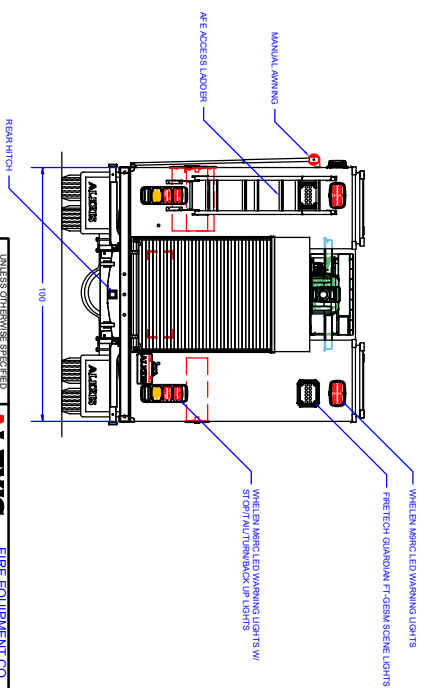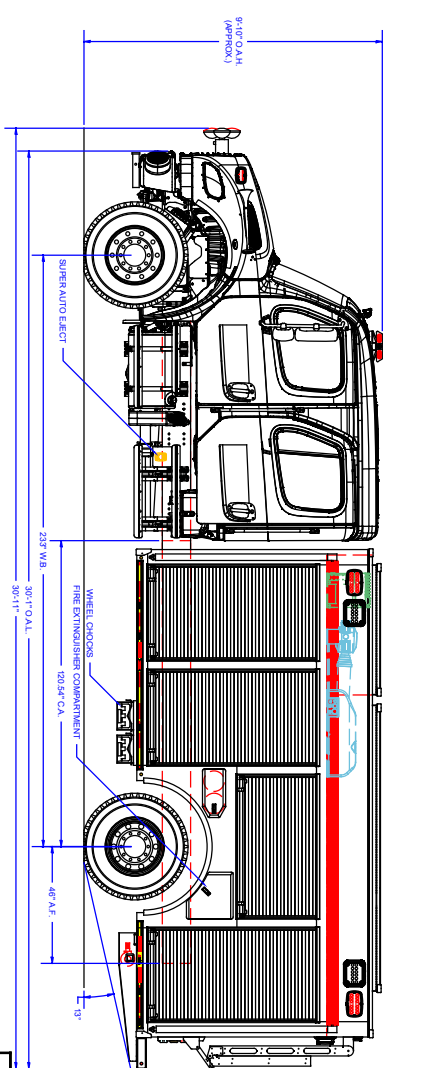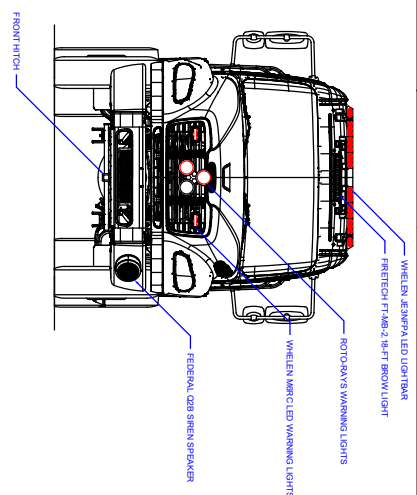

 THE LEADER IN THE P.O. BOX 548 ALEXIS, ILLINOIS 61814	DIMENSIONS ARE IN INCHES TOLERANCES ARE NOT CUMULATIVE	DOOR OPENING SIZES	COMPARTMENT DIMENSIONS
	DISCHARGE NO. 002 ANGLIA RESCUE P866 TOWBAR 1116 NET WEIGHT 131000		
The construction of this extension and delivery			
16' NWI RESCUE CONVENTIONAL FIRE DEPT			

Control Location:			
Pump Drive:			
Pump Make:			
Pump Model:			
Pump GPM:			
6			

		CONVOLUTION FIRE DET			
		CONVOLUTION, VA			
R1	35" WIDE X 62" HIGH X TRANSVERSE	909MM	32 1/2" Z2	SIZES: SCDLE	DRYS NO
R2	35" WIDE X 62" HIGH X TRANSVERSE	M. 110KMM	D 1/2" = 1"		
R3	35" WIDE X 62" HIGH X TRANSVERSE				
R4	35" WIDE X 62" HIGH X 25" DEEP				
R5	43" WIDE X 61" HIGH X 40 1/2" DEEP				
				CONTRACT #	2464
				SHEET	1 OF 1