






TOP MOUNT EQUALIZER PUMPER #2616



TECHNICAL SPECIFICATIONS

- Spartan FC-94 MFD Chassis with 10" Raised Roof
- Cummins L9 450 HP Diesel Engine
- Allison 3000 EVS Transmission
- Heavy Duty Aluminum Body and Subframe
- Side Control Pump Module
- Hale DSD 1500 GPM Pump
- Trident 2-Location Air Primer
- FRC Pump Boss Max Pressure Governor Monitoring System
- FRC Tankvision Water Tank Level Gauge with Three (3) FRC MaxVision Strip Lites
- Two (2) 6" Intakes, One (1) Each Side
- One (1) 5" Front Intake with 6" Swivel Elbow
- One (1) 2½" Gated Intake, Left Side
- Two (2) 2½" Discharge, Left Side and One (1) 2½" Discharge, Right Side
- One (1) 3" Discharge Adapted to 5" Storz, Right Side
- One (1) 3" Discharge Adapted to 2½" MNST, Rear Right
- One (1) 3" Deck Gun Discharge in Dunnage Area with Elkhart Extender
- Two (2) 1½" and One (1) 2½" Crosslay Preconnects
- One (1) 1½" Bumper Extension Preconnect
- ROM Painted Roll-Up Doors
- Three (3) Dual Wheel Well Air Bottle Compartments
- Ladder Storage Horizontal in Rear Compartment with Two (2) Sections of Suction Hose
- 1000 Gallon Poly Tank with Hose Bed
- 12 Volt Electrical System with NFPA Compliant Warning Light Package
- Whelen LED Warning Light Package with Rear Arrow Stick
- Kussmaul Chief 4012 Battery Charger
- Kussmaul 20 Amp Super Auto-Eject 120V Shoreline Connection, Left Side of Cab
- Whelen 200 Watt Siren and CPI 100 Watt Speaker
- Q2B Mechanical Siren
- Two (2) FireTech HiViz 8" LED Scene Light Bars, Rear
- One (1) FireTech HiViz 72" LED Brow Light
- Two (2) Whelen 9S LED Scene Lights, One (1) Each Side of the Cab
- Two (2) Akron Revel LED Telescopic Lights, One (1) Each Side of the Pump Module
- One (1) 10' Attic Ladder, One (1) 14' Roof Ladder with Hooks, One (1) 24' 2-Section Ladder, and Two (2) 10' Lengths of 6" Suction Hose
- 10'-2" Overall Height
- 31'10" Overall Length
- 180" Wheelbase
- 126" Cab to Axle
- 21,500 FAWR
- 31,500 RAWR
- 53,000 GVWR



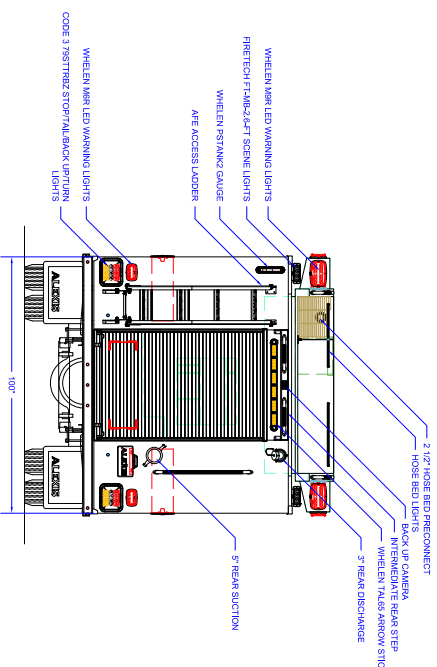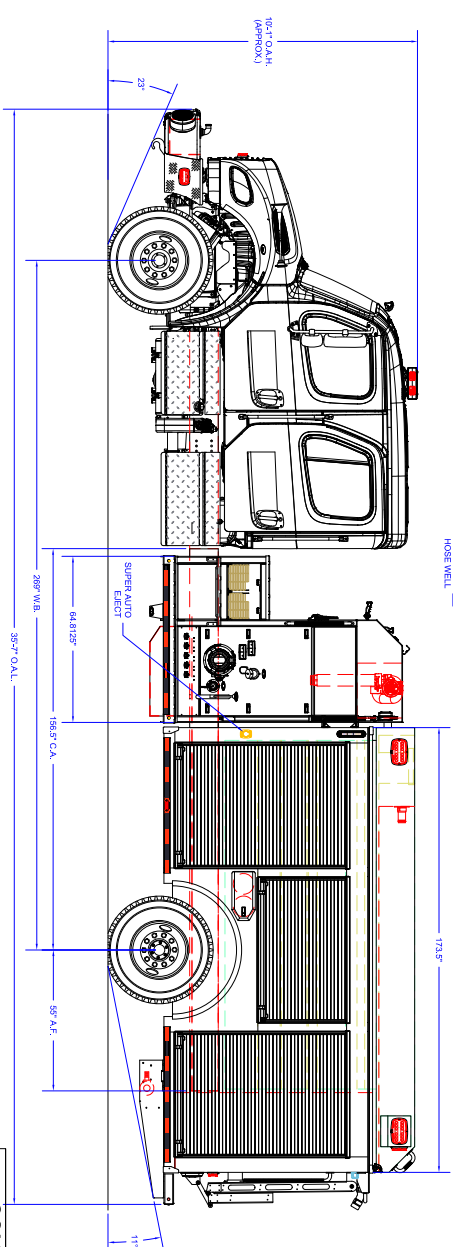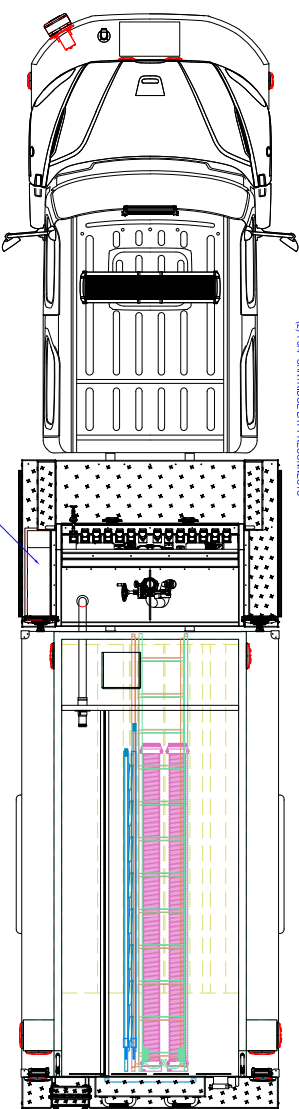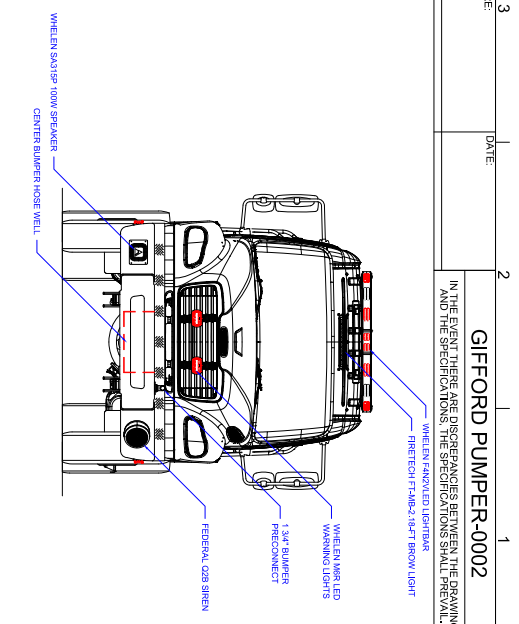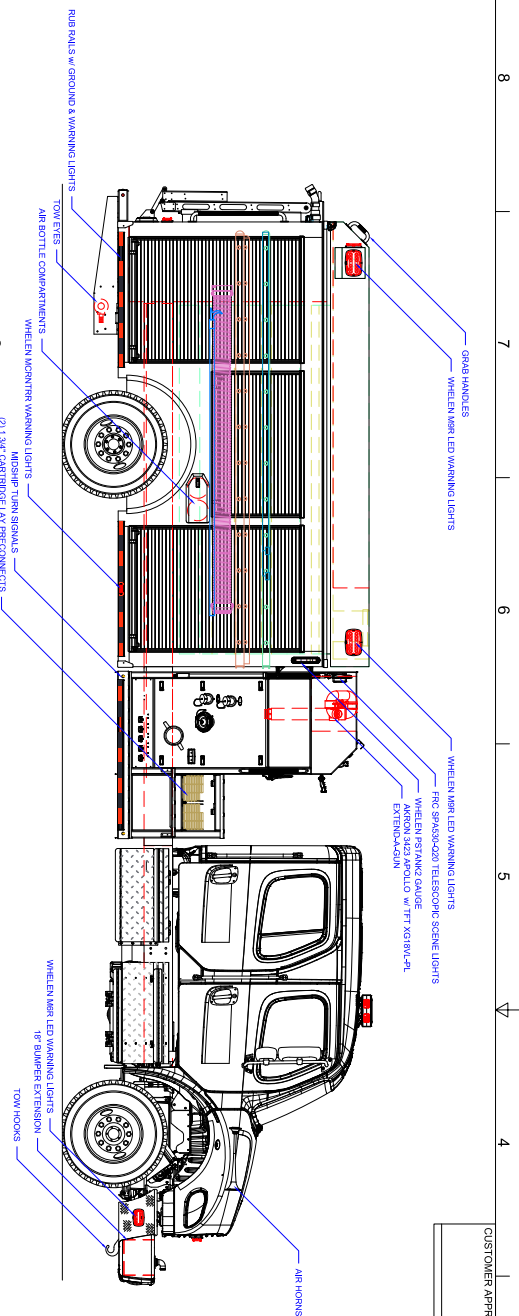

COMPARTMENT DIMENSIONS				1000 GALLON EQUALIZER GIFFORD FIRE PROT DIST GIFFORD, IL			
DOOR OPENING SIZES		ANGULAR ± 0.5° RECTANGULAR ± 1/16" METRIC ± 1.0 mm					
COMP #		SIZE		SIZE		SIZE	
The copyright of the drawings and design is the property of Gifford Fire Protection, Inc. and no change to design without written approval of Gifford Fire Protection, Inc.							
Pump Info:							
Control Location: Top		Apparatus Type: Pumpier					
Pump Drive: Split Shaft		Chassis: FREIGHTLINER M2 106 4-DR					
Pump Make: Woronoss		Tank Capacity: 1000					
Pump Model: CXC/C20							
Pump GPM: 1500		Material: Stainless Steel					
		REAR					
		L3 & R3					
		L2 & R2					
		L1 & R1					
		46" WIDE X 62" HIGH X 25" DEEP					
		54" WIDE X 50" HIGH X 25" DEEP					
		46" WIDE X 62" HIGH X 25" DEEP					
		41" WIDE X 61" HIGH X 25" DEEP					
		C/S LUCK		9/27/23			
		BROWIN		D 1/2" = 1"			
		MATERIAL		2616			
		CONTRACT #		2616			
		SHEET 1 OF 2					
REV							
CHANGE ORDER A							
PUMP MOUNT CHANGE							
11/28/23							
DATE							
DWG							
PUMP DRIVE							
PUMP MAKE							
PUMP MODEL							
PUMP GPM							
1500							
Material							
Stainless Steel							
41" WIDE X 61" HIGH X 25" DEEP							
46" WIDE X 62" HIGH X 25" DEEP							
54" WIDE X 50" HIGH X 25" DEEP							
L1 & R1							
L2 & R2							
L3 & R3							
REAR							
C/S LUCK							
BROWIN							
MATERIAL							
2616							
CONTRACT #							
2616							
S							