






SUPER TANKER #2464



TECHNICAL SPECIFICATIONS

- Spartan FC-94 MFD 10" Raised Roof Chassis
- Six (6) Person Cab
- Cummins L9 450 HP Diesel Engine
- Allison 3000 EVS Automatic Transmission
- Heavy-Duty 304 Stainless-Steel Body and Sub-Frame
- ROM Roll Up Doors, Satin Finish with Pull Straps
- 1800 Gallon Poly Tank with Painted Aluminum Bolt-On Side Panels
- Stainless-Steel Intermediate Pump Module with Heat Pan
- Waterous CX Single Stage Split-Shaft 1250 GPM Pump
- Trident Air Prime System
- FRC Pump Boss Pressure Governor & Monitoring System
- 24" Front Bumper Extension with Two (2) 1½" Preconnects, Two (2) Full Width Hose Trays and Hypalon Cover
- Two (2) 6" Intakes, One (1) Each Side, One (1) Akron 7983 Butterfly Intake Valve Left Side
- One (1) 2½" Gated Intake, Left Side
- One (1) 4" Tank Fill Adapted to 5" Storz, Rear
- Two (2) 2½" Discharges, Left Side
- One (1) 2½" Discharge, Right Side
- One (1) 3" Discharge Adapted to 4" Storz, Right Side
- One (1) 2½" Discharge, Rear
- One (1) 3" Deck Gun Discharge
- Two (2) 1½", One Deadlay Mattydale Preconnects
- One (1) Newton 10" Rear Stainless-Steel Manual Swivel Dump
- Hose Bed with Two (2) Dividers and Bulkhead LED lighting
- Ladder Storage Capacity: 24' 2 Section Ground Ladder, 14' Roof Ladder with Hooks, 10' Attic Ladder, Two (2) Pike Pole Tubes, Rear Access
- One (1) Zico Hydraulic 2,100 Gallon Folding Tank Rack, Right Side
- One (1) Fire Extinguisher Storage Compartment, Left Side Ahead of Rear Wheel Well
- One (1) Triple Air Bottle Storage Compartment, Right Side Ahead of Rear Wheel Well
- One (1) Dual Air Bottle Storage Compartment, Right Side Behind Rear Wheel Well
- One (1) 250# Roll Out Tray, L1 Compartment
- Two (2) Pac Trac Tool Boards, Upper L1 Compartment, Rear L2 Compartment
- One (1) Hinged Pac Trac Tool Board, L2 Compartment
- One (1) Cribbing Containment Door, L3 Compartment
- Two (2) 500# Roll Out Trays, One (1) Each R1, R2 Compartments
- Three (3) Rear Folding Steps
- Progressive Dynamics Battery Charger with Kussmaul 20 Amp Super Auto-Eject 120V Shoreline Connection, Above Left Front Wheel Well
- Federal Q2B Siren, Pedestal Mounted Front Bumper
- Two (2) Air Horns, Recess Mounted Front Bumper
- Whelen Electric Siren & 100W Speaker
- Whelen LED Warning Light Package
- 360° Firetech HiViz Scene Lighting
- One (1) Rear Mounted Backup Camera
- 10' Overall height
- 32' 9" Overall length
- 194" Wheelbase
- 140" Cab to Axle
- 21,500 FAWR
- 31,500 RAWR
- 53,000 GVWR



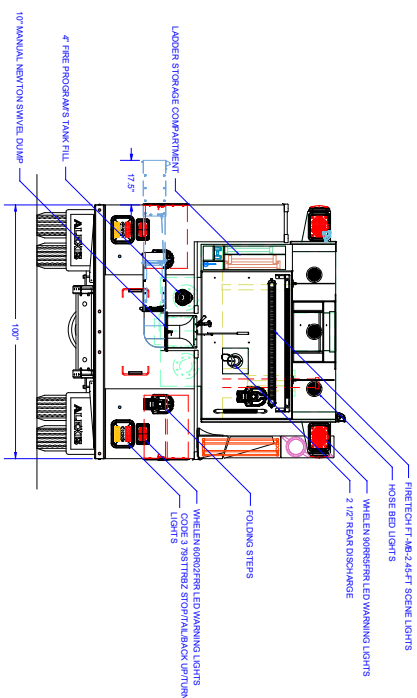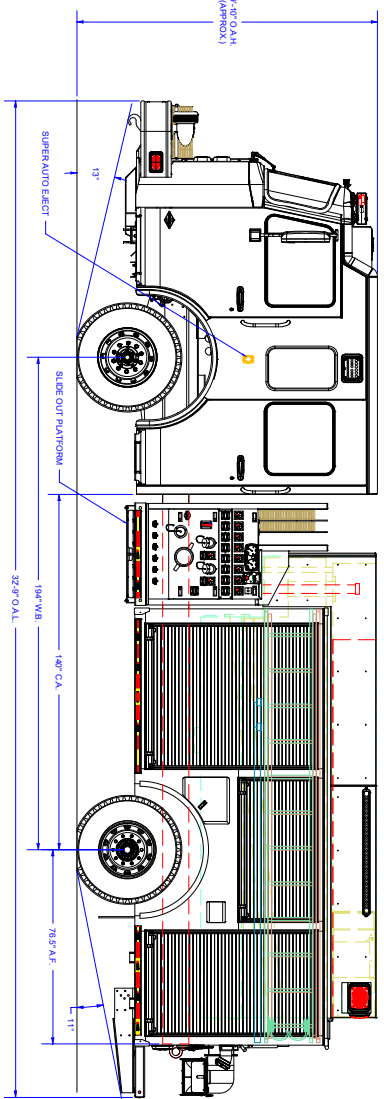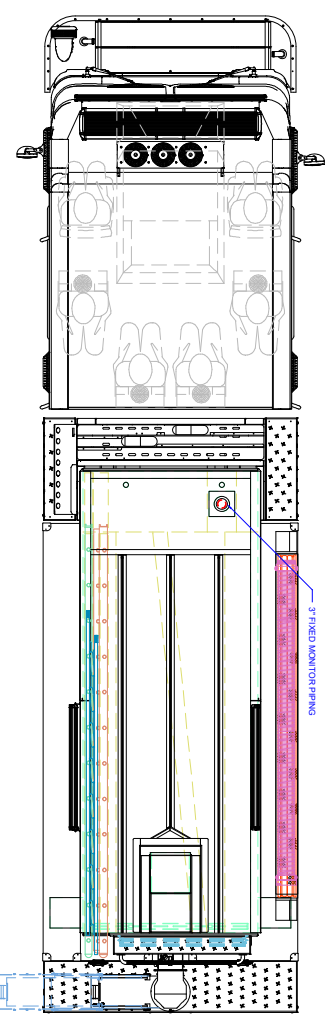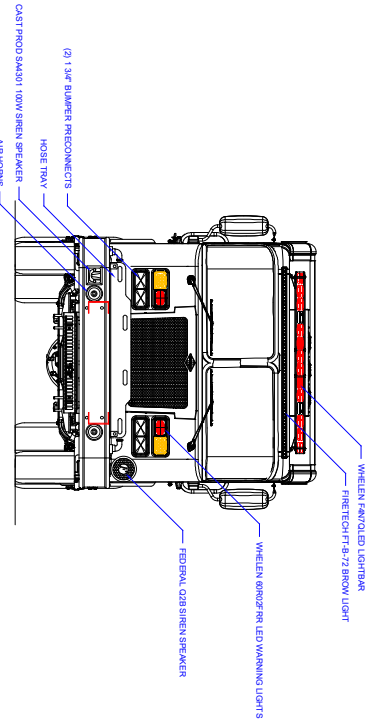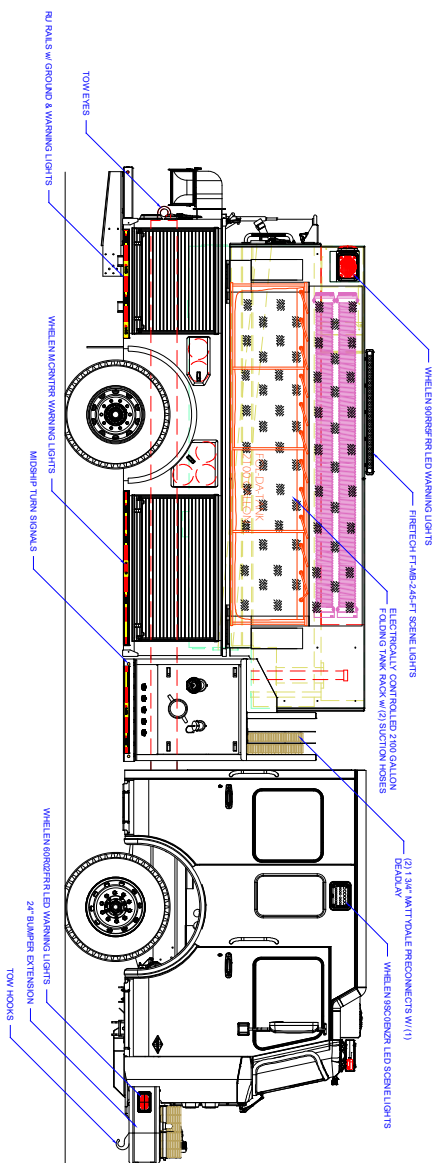

COMPARTMENT DIMENSIONS

COMP. #	DOOR OPENING SIZES
L1	55" WIDE X 62" HIGH X 12'26" DEEP
L2	54" WIDE X 25" HIGH X 28" DEEP
L3	39" WIDE X 62" HIGH X 12'26" DEEP
R1	55" WIDE X 27" HIGH X 28" DEEP
R2	39" WIDE X 27" HIGH X 28" DEEP

Pump Info:			
Control Location: Under Tank			
Pump Drive: Split Shaft			
Pump Make: Walworth			
Tank Capacity: 1800			
Pump Model: CXVC20			
Pump GPM: 1500			

Revision History			
REV	DESCRIPTION	DATE	BY
02	CHANGE ORDER A	02/20/22	JMH
01	ISSUES	10/10/20	JMH

ALEXIS FIRE EQUIPMENT CO.
P.O. BOX 549, ALEXIS, ILLINOIS 61412

SUPER TANKER
IBERIA JOINT FIRE DISTRICT
IBERIA, OH

SIZE SCALE: 1/2" = 1'
DRAWING NO: ST-A24
CONTRACT #: 2486
SHEET: 1 OF 2